



"Every step is a safe step"

We look at the world of climbing and access differently. Our journey is to find innovative ways of ensuring customers climb smartly, safely and gain access to their areas of work. In this quest, our focus is on knowledge blended to design and quality aligned to service. From the homemaker in the kitchen to the engineer in the aircraft hangar, we ensure the climb comes assured that "every step is a safe step". That is our commitment and fashion.





Home Choice

Home is where Liberti is! Ask us why. Liberti ladders are light, sturdy and safe. Our expertise in extrusion and control over the complete production processes from raw material to the final ladder and onwards to your kitchen and home help us ensure you climb smart and safely. Liberti ladders are easy to move and need no setting up time. You have multiple choices depending on the chore you would want to do at home. From fixing a bulb to trimming the hedges or plucking that flower, we have ladders of different heights and cater to diverse needs. Simple step stools, stepladders and twin ladders, ladders with a utility tray, multipurpose ladders and articulating ladders. All ladders have a clear rating on the load bearing capacities.

Workplace Choice

This is an accomplished area of expertise for us. For close to five decades we have been designing, manufacturing ladders and climbing systems for commercial and industrial use. From the simplest heavy-duty stepladders with utility trays, tool holders to the multipurpose ladders and the more specialized extension ladders, we have them all.

The Liberti commercial and industrial range stand out by virtue of Sagar Asia's commitment to deploy technology that combines resilience with sturdiness. Each of the ladders has added safety features built into them. Standard foot grips and knee rails apart, our ladders meant for commercial use have strength built into the construction and the finer detailing. For example, the rungs and the way they are riveted to the profile.

Ladders for professional use come from heights of 2 feet upwards. In both aluminum and fiberglass. With a variety of uses that make climbing and access safer and smarter. The Liberti heavy duty range is also easy to move, takes practically no setting up time and is designed for smart storage – foldable, tuckable into a corner. Our association with Little Giant also means users get the advantage of state of the art designed ladders adapted for Indian conditions by SA. Load capacity, duty rating and specifications of what the ladder is best suited for are clearly outlined.



Liberti is from Sagar Asia

Global Standards

Nothing but the best for you. Therefore, the Liberti range of ladders. All of them come with international certifications. We call our ladders as being globally certified and in fact 'SA passed'. This means that the ladders meet The US and European standards of quality and compliance. You would be glad to know that Liberti sells ladders across the world under the same brand name. India or abroad, it is the same Liberti with the quality that a world-class ladder manufacturer is expected to deliver. At Sagar Asia, we make ladders that are designed for use in homes to aircraft hangars. So rest assured...

Integration for unsurpassed quality

We are one of the biggest integrated manufacturing facilities with complete control on every aspect of the operation. Our tool room with international credentials ensures we are solution-driven and deliver customized solutions. In the Liberti range from Sagar Asia you can choose from 300 plus ladders available in different heights and load bearing capacities. From the kitchen to the airport hangar we are there.



1



m

11

m

MANNA AND C

1211960



GLOBALLY CERTIFIED



Liberti means safety, optimal design and details



Relevant, optimal design and functionality

Ladders made safe. Every step of the way is the SA promise. The range of over 300 ladders has this as the focus with a fetish for global standards and compliance. The ladders adhere to both ANSHI and OSA standards. The range is signified by its ability to constantly stay ahead of competition by providing new products and innovations. In fact SA up to the 7ft height can actually provide innumerable variations and options. In the type of ladder and material used for making the ladder. Our tool room provides the right perspective in responsive design engineering while our market intelligence and sensitivity to customer needs ensures we are there with relevant, optimal design and functionality.

Liberti Ladders from SA means climbing safely and smartly. Here are some of the unique features: Serrated steps and safety shoes, rivets and braces for extra strength and load capacity, fold down trays and tops as utility fixtures, lightweight design for easy carrying, guardrails and platform for knee protection and extra stability and comfort while working and standing, brackets and locks for secure and smooth operation, premium heavy duty rung locks, spreader arms to facilitate folding and carrying with ease, methodically labeled for clarity in specifications thus aiding choice and lastly a warranty against manufacturing defects.

Choose the right ladder

SELECT HEIGHT

Ladder Height

Highest Standing Level

SELECT PERFORMANCE

- Load Capacity
- Duty Rating
- Star & Color Code

SELECT MATERIAL Aluminium

Light weight, robust and corrosion resistant, Not for use around electricity.

Fiberglass

Non-conductive side rails. For working around electricity.

Safety first

the right way to use a ladder

Lean ladders against the wall in the right angle

Please note maximum permissible load as per duty rating

Restraint straps of step ladders always have to be tensioned

Single ladders always have to end 1 m above level of access

It is not allowed to climb/ stand on supports.

On multi-purpose ladders, rung hooks and rung lock devices have to be used

Use ground spikes on rough and slippery ground.

the wrong way to use a ladder

Never erect ladders on slippery ground

Do not lean to the side when working on ladder.

Do not stand on the top step of a double sided step ladder

Do not lean ladders against unsafe lay-on points

Last rung to stand on: Step ladders: 2nd rung from top Single ladders: 4th rung from top

It is not allowed to climb from step ladders to a higher level of access.

Do not use damaged ladders

Step Ladders

Stepladders are ideal home companions. You need one at home both for indoor and outdoor chores. Like reaching to that suitcase, or putting away the pickle jar in the kitchen. Liberti Stepladders are ideal for simple tasks like changing bulbs, cleaning windows, dusting away unreachable areas and many more routine household chores. SA makes a comprehensive range of lightweight and easy to move aluminum ladders. You have choices from 2 feet height upwards and they come with several unique safety features and global safety standards.

Platform Ladders

Liberti range of Platform Ladders are ideal temporary work platforms. At home or in a shop or a commercial environment or for that matter even in an industrial scenario. Reach out to that celling fan to clean and carry along a cleaning kit. In a shop, while stacking items on a shop shelf? In an industrial warehouse if you want to check and rearrange the products. Platform Ladders are utility driven. In most cases, a rail extends above the platform, providing an extra point of contact for the user.



Twin Ladders

Twin ladders means more than just one function and possibly two people at work simultaneously. Our Twin Ladders are designed to support use on both sides. Two people can climb simultaneously, one person per side, on either side of the ladder. For example, if there is a bulb to be changed or a suitcase to be stored in a walk-in closet, then one person can hold the bulb up while the other reaches out to the holder. Or one person can reach to the required height and the other can hand over the suitcase to be stored away. Or if you are painting a wall you can paint your side of the wall while your co-worker does the other side.

Single Ladders

Single ladders need to be propped carefully against a wall for support. Designed for traditional use and also understood to be the old fashioned, yet smart utility. Single ladders have also got to be designed uniquely for safe steps and stability. So when you buy look for rubber bumpers and slipresistant rubber feet to ensure sturdiness and safety. This type of ladder is often used at homes for various chores and seems to be a favorite library ladder. Liberti's ranges of single ladders are there for household chores and commercial sue. They come in a variety of height options

Extension Ladders

Extension ladders have a base and one or two upper sections that slide up and down to allow you to reach different heights. Liberti Extension range has sturdy and well-designed locks that keep the ladder extended to the desired height. We also have larger extension ladders, which include rope and pulley systems. These allow you to extend the ladder with ease and the setup time is reduced. To provide stability at various angles, the lower section has pivoting feet that adjust the ladder smartly without compromising on safety and stability. Extension ladders require a surface such as a wall or a roofline for support. A good choice for outdoor projects.

Combination Ladders

Multi purpose ladders are multifunctional and multi positional. You can position them in multiple spaces work. Different floor levels. Different uses. Ladder, scaffold base, like a mini extension ladder- the choices and options are many. SA has collaborated with leading players across the world and combined it with their understanding of the users needs. So you may actually discover technical innovations and additions to the known designs. This competency of SA is by virtue of the responsive design and globally recognized tool room.



Articulating Ladders

When you want more than one ladder in one ladder! Articulating Ladders are uniquely designed in two parts or three parts. In some cases they can even become six ladders in one especially when it is a three-part ladder! A trestle step, single ladder, double or triple extension ladder or even a stairway ladder – all of this is possible with our Articulating Ladder range. Versatile? Safe and steady? Yes to all. Our range of Articulating Ladders is designed to be stable, durable and functionally aligned to the job on hand. The ladders can be folded up into a compact shape for easy transportation and storage.









Step Ladder

Aluminium Step Stool ANSI 14.2

100

3.27

21



LIB RTI 0 9 0 NOTICE ð a 0 E Manufactured Under Licence From Liberti Ladders, USA

- Aluminium extruded anti skid top & steps
- Extra wide slip resistant traction-tread
- Slip resistant safety shoes
- Aluminium extruded braces for extra stability




1000 Series

300lbs Type 1A

Extra Heavy duty Aluminium Step Stool Ideal for chores around the house









Stepladder Aluminium 10 ANSI 14.2 0 6 8.050 ť 6 RING LUDINGN CONSINCIT RINGTOCHT 6 **1100 SERIES ALUMINIUM STEP STOOL - SPECIFICATIONS** Step Highest Approx Approx Maximum Ladder Size Standing Width Spread Reach No Level 0 Mts. Ft. Mts. Ft. Mts. Ft. Mts Ft. Mts. Ft. 1104 1.22 0.48 2.44 0.60 8 4 1.55 0.75 2 2.43 0.91 9 1105 1.52 5 0.51 1.67 0.92 3 3 2.74 h 0.55 1.80 1.07 3.5 1.21 10 1106 1.82 6 4 3.04

X,

Available Sizes: 4', 5' & 6' ft

- Moulded copolymer utility top to hold tools and a hook to hang a bucket
- Wide" 3" slip resistant serrated aluminium steps for safe climbing
- Slip resistant safety shoes
- Aluminium extruded braces for extra stability




1100 Series

200lbs Type III

Light weight Aluminum Step ladder



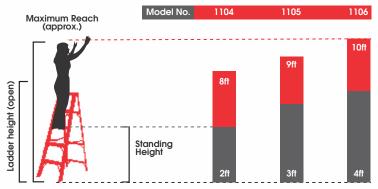



Stepladder

Aluminium ANSI 14.2

-

C Constant and Con

11.6

141

47

G

1 Sales

| | | | | | 6 | | 1000 | | | |
|---|---------|-----------------|--------|------------------|--------|------------------------------|----------|------------------|-------|-----|
| 1200 | SERIE | S AL | UMIN | IUM | STEP S | TOOL | - SPE | CIFIC | CATIO | NS |
| Step Ladder No | er Size | Approx Width | | Approx Spread | | Highest Standing Level | | Maximun Reach | | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| 1204 | 1.22 | 4 | 0.48 | 1.55 | 0.75 | 2.44 | 0.60 | 2 | 2.43 | 8 |
| 1205 | 1.52 | 5 | 0.51 | 1.67 | 0.92 | 3 | 0.91 | 3 | 2.74 | 9 |
| 1206 | 1.82 | 6 | 0.55 | 1.80 | 1.07 | 3.5 | 1.21 | 4 | 3.04 | 10 |
| 1208 | 2.44 | 8 | 0.64 | 2.12 | 1.4 | 4.6 | 1.7 | 6 | 3.65 | 12 |
| 1210 | 3.04 | 10 | 0.8 | 2.6 | 1.7 | 5.6 | 2.4 | 8 | 4.3 | 14 |
| l i i i i i i i i i i i i i i i i i i i | A | vaila | able S | izes. | 4'.5'. | 6' 8' 8 | \$ 10' f | t | | l . |


- Moulded copolymer utility top to hold tools and a hook to hang a bucket
- Wide" 3" slip resistant serrated aluminium steps for safe climbing
- Fold down utility tray to hold paint accessories, toolbox etc
- Slip resistant safety shoes
- Aluminium extruded braces for extra stability



1200 Series 225lbs Type II

Medium duty Aluminium Stepladder with Utility Tray



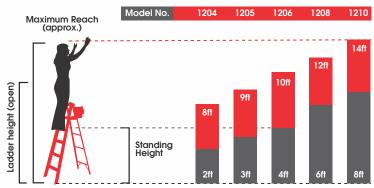















Stepladder

Aluminium ANSI 14.2

| 1400 \$ | SERIE | S ALL | JMINI | UM SI | iep la | DDER | s - sp | ECIFI | CATIC | ONS |
|----------------------|-------|-------|-----------------|-------|------------------|----------|------------------------------|-------|------------------|-----|
| Step Ladder No | Size | | Approx Width | | Approx Spread | | Highest Standing Level | | Maximum Reach | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| 1404 | 1.22 | 4 | 0.50 | 1.64 | 0.74 | 2.43 | 0.60 | 2 | 2.43 | 8 |
| 1406 | 1.82 | 6 | 0.60 | 1.97 | 1.10 | 3.60 | 1.22 | 4 | 3.04 | 10 |
| 1408 | 2.43 | 8 | 0.70 | 2.30 | 1.40 | 4.60 | 1.82 | 6 | 3.65 | 12 |
| 1410 | 3.04 | 10 | 0.76 | 2.50 | 1.70 | 5.57 | 2.43 | 8 | 4.26 | 14 |
| 1412 | 3.62 | 12 | 0.82 | 2.80 | 2.00 | 6.6 | 3.04 | 10 | 4.86 | 16 |
| | | Avai | lable | Sizes | : 4', 6' | . 8'. 10 |)' & 12 | 2' ft | 1 | 1 |

M ML

۲

۲

CAUTION

國家意

DANGE

A CONSTR

- Heavy duty moulded top to hold tools and accessories
- Aluminium spreader link with hand grip for easy one-handed carry and close
- Wide 3" slip resistant serrated aluminium steps
- Constructed with heavy duty aluminium rail and braces
- Heavy duty slip resistant safety shoes




1400 Series 300lbs Type IA

1412

Heavy Duty Professional Aluminium Stepladder



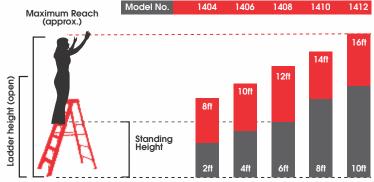









Stepladder

Fiberglass STD:14.5



9

3


| | | | | | | H. | {} ={} / | 0 | | | - |
|----------------------|-------|--------|--------|--------|---------------|--------|----------|---------------------|------------------|-----|---|
| 5400 | SERIE | S FIB | ERGL | ASS SI | TEP LA | DDER | S - SPE | | CATIO | NS | |
| Step Ladder No | Siz | Size | | Width | | Spread | | hest ding vel | Maximum Reach | | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. | |
| 5404 | 1.22 | 4 | 0.50 | 1.64 | 0.74 | 2.43 | 0.60 | 2 | 2.43 | 8 | |
| 5406 | 1.82 | 6 | 0.60 | 1.97 | 1.10 | 3.60 | 1.22 | 4 | 3.04 | 10 | |
| 5408 | 2.43 | 8 | 0.70 | 2.30 | 1.40 | 4.60 | 1.82 | 6 | 3.65 | 12 | |
| 5410 | 3.04 | 10 | 0.76 | 2.50 | 1.70 | 5.57 | 2.43 | 8 | 4.26 | 14 | |
| 5412 | 3.62 | 12 | 0.82 | 2.80 | 2.00 | 6.6 | 3.04 | 10 | 4.86 | 16 | Ň |
| | 4 | Availa | able S | Sizes. | <i>A</i> ' 6' | 8' & 1 | በ' & ነ | 2' ft | · | | |

- Super tough copolymer top for strength & durability
- Dog bone spreader with hand grip for easy one-handed carry & close
- Durable non-conductive fiberglass side rails
- Aluminium braces on all steps
- Slip resistant safety shoes
- Specially designed aluminium heavy duty spreader bars with Z brackets



5412



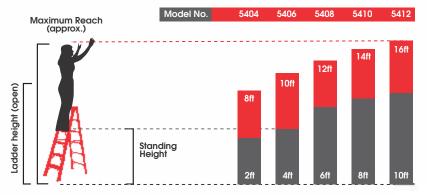









Stepladder

Safe frame STD : ANSI 14.5 Gian

A CONTRACT





- Face forward top cap
- Removal of top rung eliminate a leading cause for stepladder accidents
- Wide comfort step to reduce foot fatigue improve stability
- Ground Cue indicator alerts user
 to last step
- Built-in Quad Ratchet Levelers adjust up to 6.25"




Little Giant

Safe Frame 375lbs Type IAA

Special duty FRP Stepladders Ideal for painting, carpentry and odd jobs



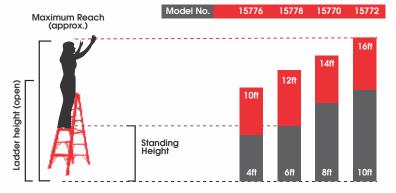











Platform Ladder

LIJ RT!

0

8

Aluminium STD: ANSI 14.2



| Platfrom Ladder No | | | Width | | Spread | | Highest Standing Level | | Maximum Reach | |
|--------------------------|------|-----|-------|------|--------|------|------------------------------|-------|------------------|-------|
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| 9904 | 0.57 | 2 | 0.50 | 1.66 | 0.65 | 2.12 | 0.59 | 1'11" | 2.42 | 7'9" |
| 9905 | 0.85 | 3 | 0.55 | 1.79 | 0.85 | 2.79 | 0.89 | 2'9" | 2.74 | 8'9" |
| 9906 | 1.15 | 4 | 0.61 | 2.00 | 1.00 | 3.25 | 1.2 | 3'10" | 3 | 9'10" |

Available Sizes: 2', 3' & 4' ft


- Tubular construction, makes this ladder light weight and allows for compact storage
- Aluminium fold down utility tray for tools and paint accessories
- Large comfortable slip resistant platform
- Rubber slip resistant safety shoes
- Wide slip resistant serrated aluminium steps
- Above the knee level guardrail

9900 Series

200lbs Type III

Light Duty Aluminium Platform Ladder Ideal for Home Use



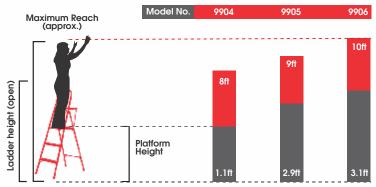









Platform Ladder

.

LBERT

0

ð

.

.

E.

0

6

Aluminium



| Platform Ladder No | - | | Approx Width | | Approx Spread | | Highest Standing Level | | Maximum Reach | |
|--------------------------|------|-----|-----------------|------|------------------|------|------------------------------|-----|------------------|-----|
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| P1203 | 1.52 | 5 | 0.6 | 2 | 0.9 | 2.95 | 0.9 | 3 | 2.74 | 9 |
| P1204 | 1.82 | 6 | 0.63 | 2.06 | 1.1 | 3.61 | 1.2 | 4 | 3.04 | 10 |
| P1205 | 2.12 | 7 | 0.68 | 2.21 | 1.25 | 4.11 | 1.5 | 5 | 3.35 | 11 |
| P1206 | 2.43 | 8 | 0.72 | 2.36 | 1.4 | 4.6 | 1.8 | 6 | 3.65 | 12 |
| P1207 | 2.74 | 9 | 0.76 | 2.51 | 1.55 | 5.1 | 2.1 | 7 | 3.95 | 13 |
| P1208 | 3.04 | 10 | 0.8 | 2.62 | 1.7 | 5.6 | 2.4 | 8 | 4.26 | 14 |

- Large comfortable slip resistant platform
- Safety & above knee level guard rail
- Outside pinch-proof aluminium/steel spreader arms
- Specially designed aluminium / braces & rear horizontal struts providing unequalled rigidity
- Slip resistant safety shoes




P1200 Series

225lbs Type II

Medium Duty Aluminium Platform Ladder without handrail



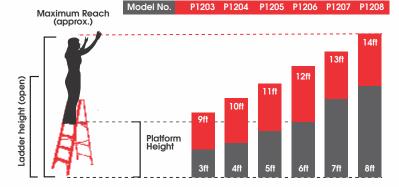





Platform Ladder

8 6

LE STI

Q = 11

• 🔘

UE RT

.

Aluminium

t;


| Platform Ladder No | Siz | e | | orox dth | | | Highest Standing Level | | Maximur Reach | | anun . |
|--------------------------|------|-----|------|-------------|------|------|------------------------------|-----|------------------|-----|--------|
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. | |
| P1205 | 2.12 | 7 | 0.68 | 2.21 | 1.25 | 4.11 | 1.5 | 5 | 3.35 | 11 | |
| P1206 | 2.43 | 8 | 0.72 | 2.36 | 1.4 | 4.6 | 1.8 | 6 | 3.65 | 12 | |
| P1207 | 2.74 | 9 | 0.76 | 2.51 | 1.55 | 5.1 | 2.1 | 7 | 3.95 | 13 | |
| P1208 | 3.04 | 10 | 0.8 | 2.62 | 1.7 | 5.6 | 2.4 | 8 | 4.26 | 14 | |

- Large comfortable slip resistant platform
- Safety & above knee level guard rail
- Outside pinch-proof
 aluminium/spreader arms
- Specially designed aluminium/ steel braces & rear horizontal struts providing unequalled rigidity
- Slip resistant safety shoes
- Handrail for comfortable climbing



Medium Duty Aluminium Platform Ladder with Handrail



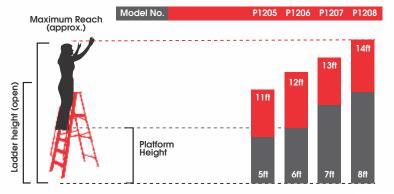











Platform Ladder

3 9

Aluminium

| Platform Ladder No | Size | | Approx Width | | Approx Spread | | Highest Standing Level | | Maximun Reach | |
|--------------------------|------|-----|-----------------|------|------------------|-----|------------------------------|-----|------------------|-----|
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| P1405 | 2.15 | 7 | 0.64 | 2.11 | 1.1 | 3.6 | 1.2 | 5 | 3.05 | 10 |
| P1406 | 2.43 | 8 | 0.72 | 2.36 | 1.4 | 4.6 | 1.8 | 6 | 3.65 | 12 |
| P1408 | 3.04 | 10 | 0.80 | 2.62 | 1.7 | 5.6 | 2.4 | 8 | 4.26 | 14 |
| P1410 | 3.64 | 12 | 0.90 | 2.9 | 2 | 6.6 | 3 | 10 | 4.86 | 16 |
| P1412 | 4.24 | 14 | 1.00 | 3.2 | 2.3 | 7.6 | 3.6 | 12 | 5.46 | 18 |

- Safety guard rail above the knee level
- Large comfortable slip resistant platform
- Aluminium braces on steps and rear horizontal struts providing unequalled rigidity
- Heavy duty aluminium rail
- Outer spreader arms with pinch-proof aluminium
- Heavy duty slip resistant safety shoes

P1406







P1408

P1410,







Platform Ladder

Fiberglass



00

10%

e manager

| n r Size | | Width | | Spread | | Stan | ding | Maximum Reach | |
|-------------|------------------------------|---|--|---|--|---|--|--|--|
| Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| 1.82 | 6 | 0.63 | 2.06 | 1.1 | 3.61 | 1.2 | 4 | 3.04 | 10 |
| 2.43 | 8 | 0.72 | 2.36 | 1.4 | 4.6 | 1.8 | 6 | 3.65 | 12 |
| 3.04 | 10 | 0.8 | 2.62 | 1.7 | 5.6 | 2.4 | 8 | 4.26 | 14 |
| 3.65 | 12 | 2.00 | 6.56 | 2.00 | 6.6 | 3.00 | 10.00 | 4.87 | 16 |
| | Mts. 1.82 2.43 3.04 | Mts. Ft. 1.82 6 2.43 8 3.04 10 | Mts. Ft. Mts. 1.82 6 0.63 2.43 8 0.72 3.04 10 0.8 | Mts. Ft. Mts. Ft. 1.82 6 0.63 2.06 2.43 8 0.72 2.36 3.04 10 0.8 2.62 | Mts. Ft. Mts. Ft. Mts. 1.82 6 0.63 2.06 1.1 2.43 8 0.72 2.36 1.4 3.04 10 0.8 2.62 1.7 | Mts. Ft. Mts. Ft. Mts. Ft. 1.82 6 0.63 2.06 1.1 3.61 2.43 8 0.72 2.36 1.4 4.6 3.04 10 0.8 2.62 1.7 5.6 | Size Width Spred Stan Mts. Ft. Mts. Ft. Mts. Ft. Mts. 1.82 6 0.63 2.06 1.1 3.61 1.2 2.43 8 0.72 2.36 1.4 4.6 1.8 3.04 10 0.8 2.62 1.7 5.6 2.4 | Mts. Ft. Mts. Ft. Mts. Ft. Mts. Ft. 1.82 6 0.63 2.06 1.1 3.61 1.2 4 2.43 8 0.72 2.36 1.4 4.6 1.8 6 3.04 10 0.8 2.62 1.7 5.6 2.4 8 | Size Width Spread Standing Level Mdxir Red Mts. Ft. Mts. Ft. Mts. Ft. Mts. Ft. Mts. 1.82 6 0.63 2.06 1.1 3.61 1.2 4 3.04 2.43 8 0.72 2.36 1.4 4.6 1.8 6 3.65 3.04 10 0.8 2.62 1.7 5.6 2.4 8 4.26 |


- Wide aluminium platform for safe & comfortable climbing
- Dog bone spreader with hand grip for easy one-handed carry & close
- Heavy duty non-conductive fiberglass side rails
- Slip resistant & heavy duty safety shoes
- Above the knee level safety guard rail with heavy duty side plates



P5400 Series 375lbs Type IAA

Special duty Fiberglass Platform Ladder



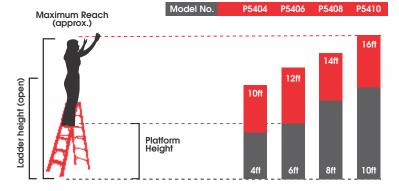











Platform Ladder

Eurostar Aluminium STD : EN-131

EUROSTAR

ELINOSTARI



| EUROSTAR SERIES ALUMINIUM PLATFORM LADDERS - SPECIFICATIONS | | | | | | | | | | | |
|---|-----------|--------|--------|--------|------------------|-------|--|--|--|--|--|
| Platform Ladder No | Platform | Height | Ladder | Height | Maximum Reach | | | | | | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | | | | | |
| 103 | 0.60 | 1.98 | 1.27 | 4.19 | 2.60 | 8.58 | | | | | |
| 104 | 0.81 2.67 | | 1.50 | 4.95 | 2.81 | 9.27 | | | | | |
| 105 | 1.03 | 3.40 | 1.73 | 5.71 | 3.03 | 10.00 | | | | | |
| 106 | 1.24 | 4.09 | 1.96 | 6.47 | 3.24 | 10.69 | | | | | |
| 107 | 1.47 | 4.85 | 2.21 | 7.29 | 3.47 | 11.45 | | | | | |
| 108 | 1.70 | 5.61 | 2.44 | 8.05 | 3.70 12.21 | | | | | | |
| Available Sizes: 3', 4', 5', 6', 7' & 8' ft | | | | | | | | | | | |


- Knee height guard rail for safety
- Rails made from aluminium extruded profiles for maximum stability
- Wide, comfortable powder coated platform with non-slip surface
- Front & rear rail strengthened by riveting to each other - no plastic hinges
- Wide, deep steps with non-slip surface
- Steps strengthened by riveting to rails
- Slip-resistant safety shoes
- Safety straps for models 106, 107 and 108



Eurostar Premium "DIY" Aluminium Platform Ladder





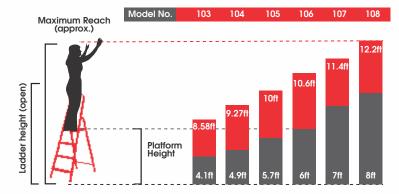

103





105





A

108



Platform Ladder

Liberti Lite Aluminium **EASY/VLITE** STD : ANSI 14.2

Ø,

G





| 200 SER | IES LIE | BERTI | EASY I | N LITE F | PLATFO | rm lac | DERS | - SPEC | IFICAT | IONS |
|--------------------------|---------|-------|---------|-----------------|----------|-------------|---------|----------------------|------------------|------|
| Platform Ladder No | | Size | | Approx Width | | orox ead | Stan | hest iding vel | Maximum Reach | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| 202 | 1.05 | 3.45 | 0.45 | 1.48 | 0.55 | 1.8 | 0.48 | 1.57 | 2.28 | 7.57 |
| 203 | 1.28 | 4.2 | 0.48 | 1.57 | 0.68 | 2.23 | 0.69 | 2.26 | 2.51 | 8.26 |
| 204 | 1.51 | 4.95 | 0.5 | 1.64 | 0.8 | 2.62 | 0.9 | 2.95 | 2.73 | 8.95 |
| 205 | 1.74 | 5.7 | 0.53 | 1.74 | 0.92 | 3.01 | 1.10 | 3.60 | 2.93 | 9.6 |
| 206 | 1.97 | 6.46 | 0.55 | 1.82 | 1.04 | 3.4 | 1.31 | 4.3 | 3.13 | 10.3 |
| | | Avo | ailable | ə Size | s: 2', 3 | 3', 4', 5 | 5' & 6' | ft | 1 | |


- Large comfortable & wide slip resistant plastic top
- Light duty aluminium rail
- Specially designed plastic platform with safety lock
- Slip resistant safety shoes
- Safety straps for models 204, 205 & 206
- Specially designed wide resistant serrated aluminium hollow type slip



Liberti Easy N Lite 2001bs Type III

Light Weight Aluminium Platform Ladder



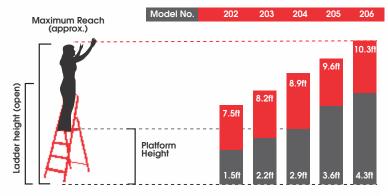













Platform Ladder

Į.

Liberti Premium ANSI 14.2







Available Sizes: 2', 3', 4', 5', 6' & 7' ft


- WIDE plastic platform
- Light duty aluminium rail
- Specially designed/steel braces for bottom slip
- Heavy duty slip resistant safety shoes
- Safety straps for models 405 & 406
- Wide deep steps with non slip surface
- Hand rails for comfortable climbing
- Front & rear rails strengthened by rivaling to each other with plastic hinges.





Light Weight Aluminium Platform Ladder with handrails



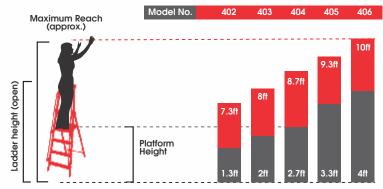













Twin Ladders

der.

OK

The state

0 0

0

6

Aluminium ANSI 14.2

| Twin Ladder No | Siz | e | | orox dth | App Spre | | Maximum Reach | |
|----------------------|------|-----|------|-------------|-------------|-----|------------------|-----|
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. |
| T1404 | 1.22 | 4 | 0.55 | 1.8 | 0.9 | 3 | 2.43 | 8 |
| T1406 | 1.82 | 6 | 0.62 | 2 | 1.28 | 4.2 | 3.04 | 10 |
| T1408 | 2.43 | 8 | 0.72 | 2.4 | 1.62 | 5.3 | 3.65 | 12 |
| T1410 | 3.04 | 10 | 0.8 | 2.6 | 1.98 | 6.5 | 4.26 | 14 |


Y

- Wide 6" aluminium top
- Outside pinch-proof Aluminium spreader arms
- Two way climbing
- Heavy duty slip resistant safety shoes
- Heavy duty aluminium rail



T1400 Series 300lbs Type IA

Extra Heavy Duty Aluminium 2-way Stepladder

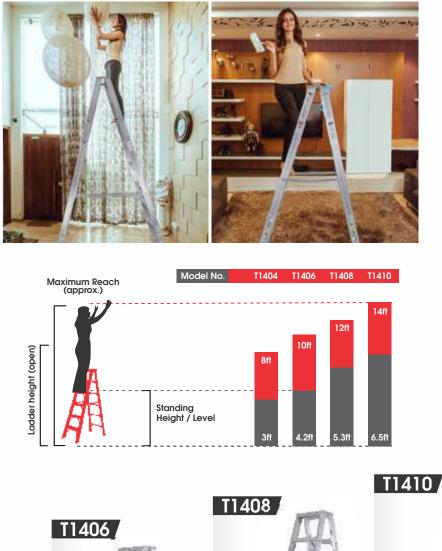














Twin Ladders

Fiberglass



-

0

| Twin Ladder No | ler Size | | | Approx Width | | orox ead | Maximum Reach | |
|----------------------|----------|-----|------|-----------------|------|-------------|------------------|-----|
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. |
| T5404 | 1.22 | 4 | 0.55 | 1.8 | 0.9 | 3 | 2.43 | 8 |
| T5406 | 1.82 | 6 | 0.62 | 2 | 1.28 | 4.2 | 3.04 | 10 |
| T5408 | 2.43 | 8 | 0.72 | 2.4 | 1.62 | 5.3 | 3.65 | 12 |
| T5410 | 3.04 | 10 | 0.8 | 2.6 | 1.98 | 6.5 | 4.26 | 14 |
| T5412 | 3.65 | 12 | 0.90 | 0.90 3.00 | | 6.60 | 4.80 16.00 | |

Available Sizes: 4', 6', 8', & 10' ft

- Large comfortable slip resistant 6" top
- Outside pinch-proof aluminium/ dog bone spreader arms
- Specially designed aluminium & rear horizontal struts providing unequalled rigidity
- Heavy duty slip resistant safety shoes
- Two way climbing
- Heavy duty extruded aluminium top side plates



T5400 Series 375lbs Type IAA


Special duty Fiberglass Twin Ladder





Single Ladders

Aluminium



| 2300 SE | 2300 SERIES ALUMINIUM SINGLE LADDERS - SPECIFICATIONS | | | | | | | | | | | | |
|---|---|-------------|----------|---------------------|---------------------|------|------------------|-----|--|--|--|--|--|
| Single Ladder No | App Wie | orox dth | Nom | lder ninal ze | Higt Stan Lev | ding | Maximum Reach | | | | | | |
| | Mts. | Ft. | Mts. Ft. | | Mts. | Ft. | Mts | Ft. | | | | | |
| 2308-1 | 0.5 | 1.64 | 2.55 | 8.4 | 1.525 | 5 | 2.74 | 9 | | | | | |
| 2310-1 | 0.5 | 1.64 | 3.16 | 10.4 | 2.135 | 7 | 3.35 | 11 | | | | | |
| 2312-1 | 0.5 | 1.64 | 3.77 | 12.4 | 2.745 | 9 | 3.96 | 13 | | | | | |
| 2314-1 | 0.5 | 1.64 | 4.38 | 14.4 | 3.355 | 11 | 4.47 | 15 | | | | | |
| 2316-1 | 0.5 | 1.64 | 4.99 | 16.4 | 3.965 | 13 | 5.18 | 17 | | | | | |
| 2318-1 | 0.5 | 1.64 | 5.6 | 18.4 | 4.575 | 15 | 5.8 | 19 | | | | | |
| 2320-1 | 0.5 | 1.64 | 6.21 | 20.4 | 5.185 | 17 | 6.4 | 21 | | | | | |
| Available Sizes: 8', 10', 12', 14', 16', 18' & 20' ft | | | | | | | | | | | | | |





- Mar-resistant end caps
- Top 3 rungs in red colour to indicate "do not claim"
- Heavy duty I beam rails for safety and durability
- Shoe rests flat or is held in spur position
- All "O" rungs / "D" rungs are slip resistant serrated rungs for durability & extra strength

2300 Series 300lbs Type IA

Ideal for industrial fixed height works Extra Heavy Duty Aluminium Single Ladders



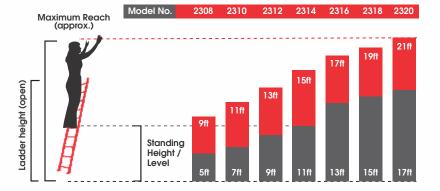


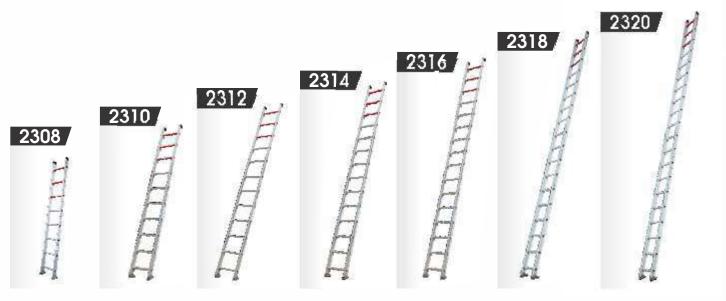



Single Ladders

Fiberglass




| 6300 SE | 6300 SERIES FIBERGLASS SINGLE LADDERS - SPECIFICATIONS | | | | | | | | | | | |
|---|--|-------------|-----------|---------------------|---------------------|------|-------------|------------|--|--|--|--|
| Single Ladder No | App Wie | orox dth | Nom | lder ninal ze | Higl Stan Lev | ding | Maxi Rec | mum ach | | | | |
| | Mts. | Ft. | Mts. Ft. | | Mts. | Ft. | Mts | Ft. | | | | |
| 6308-1 | 0.5 | 1.64 | 2.55 | 8.4 | 1.525 | 5 | 3.35 | 11 | | | | |
| 6310-1 | 0.5 | 1.64 | 3.16 | 10.4 | 2.135 | 7 | 3.965 | 13 | | | | |
| 6312-1 | 0.5 | 1.64 | 3.77 | 12.4 | 2.745 | 9 | 4.475 | 15 | | | | |
| 6314-1 | 0.5 | 1.64 | 4.38 | 14.4 | 3.355 | 11 | 5.185 | 17 | | | | |
| 6316-1 | 0.5 | 1.64 | 4.99 | 16.4 | 3.965 | 13 | 5.8 | 19 | | | | |
| 6318-1 | 0.5 | 1.64 | 5.6 | 18.4 | 4.575 | 15 | 6.4 | 21 | | | | |
| 6320-1 | 0.5 | 1.64 | 6.21 20.4 | | 5.185 | 17 | 7.01 | 23 | | | | |
| Available Sizes: 8', 10', 12', 14', 15', 16', 18', & 20' ft | | | | | | | | | | | | |




- Mar-resistant end caps
- Top 3 rungs in red colour to indicate "do not claim"
- Durable non-conductive fiberglass side rails
- Non-slip heavy duty safety shoes
- All "O" rungs / "D" rungs are slip resistant serrated rungs for durability & extra strength





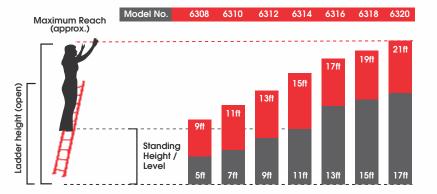

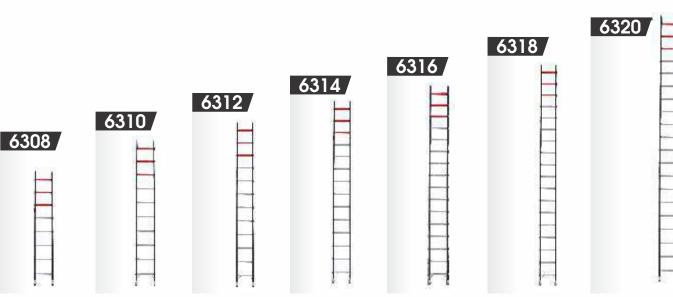



Extension Ladders

Aluminium










| 2300-2 SERIES ALUMINIUM EXTENTION LADDERS - SPECIFICATIONS | | | | | | | | | | | |
|--|--|-----------|------|---------------------|---------------------|-----|------------------|-----|--|--|--|
| Single Ladder No | App Wie | | Non | lder ninal ze | Higt Stan Lev | • | Maximum Reach | | | | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | | | |
| 2316-2 | 0.48 | 1.57 | 2.66 | 8.72 | 3.05 | 10 | 4.87 | 16 | | | |
| 2320-2 | 0.48 | 0.48 1.57 | | 10.72 | 4.27 | 14 | 6.09 | 20 | | | |
| 2324-2 | 0.48 | 1.57 | 3.88 | 12.72 | 5.49 | 18 | 4.475 | 24 | | | |
| 2328-2 | 0.48 | 1.57 | 4.49 | 14.72 | 6.71 | 22 | 5.185 | 28 | | | |
| 2330-2 | 0.48 | 1.57 | 5.1 | 16.72 | 7.31 | 24 | 9.14 | 30 | | | |
| 2332-2 | 0.48 | 1.57 | 5.71 | 18.72 | 7.92 | 26 | 9.75 | 32 | | | |
| 2336-2 | 0.48 | 1.57 | 6.32 | 20.72 | 9.14 | 30 | 10.97 | 36 | | | |
| 2340-2 | 0.48 | 1.57 | 6.92 | 22.72 | 10.36 | 34 | 12.19 | 40 | | | |
| Avai | Available Sizes: 16', 20', 24', 28', 30', 32', 36', & 40' ft | | | | | | | | | | |

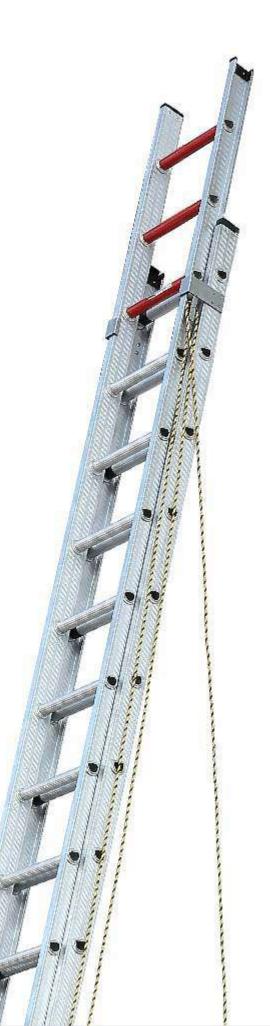

- Mar-resistant end caps
- Top 3 rungs in red colour to indicate "do not claim"
- Rope operated ladder with premium heavy duty rung locks
- Shoe rests flat or is held in spur position
- All "O" rungs / "D" rungs are slip resistant serrated rungs for durability & extra strength







Ideal for industrial fixed height works extra heavy duty



Antonion

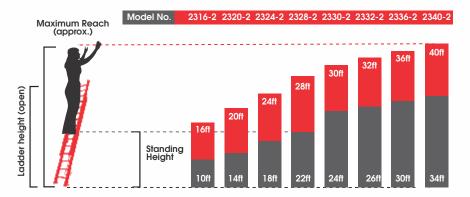


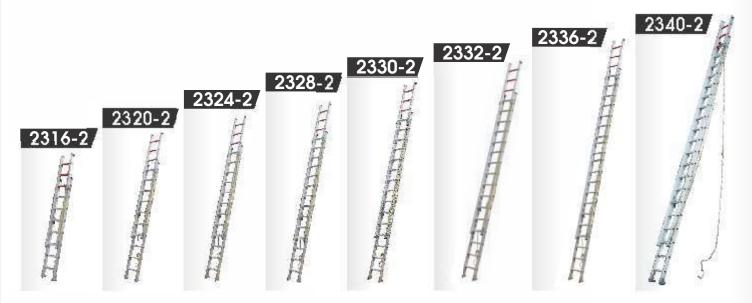




Extension Ladders

Fiberglass ANSI 14.5

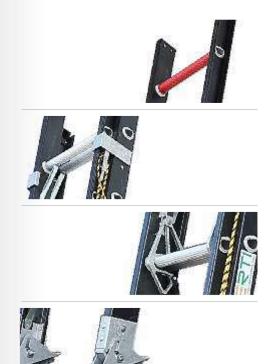

| 6300-2 SERIES ALUMINIUM EXTENTION LADDERS - SPECIFICATIONS | | | | | | | | | | | |
|--|--|-------------|------------|---------------------|---------------------|------|------------------|-----|--|--|--|
| Single Ladder No | App Wie | prox dth | Non | lder ninal ze | Higt Stan Lev | ding | Maximum Reach | | | | |
| | Mts. | Ft. | Mts. Ft. | | Mts. | Ft. | Mts | Ft. | | | |
| 6316-2 | 0.48 | 1.57 | 2.66 | 8.72 | 3.05 | 10 | 4.87 | 16 | | | |
| 6320-2 | 0.48 | 1.57 | 3.27 | 10.72 | 4.27 | 14 | 6.09 | 20 | | | |
| 6324-2 | 0.48 | 1.57 | 3.88 | 12.72 | 5.49 | 18 | 4.475 | 24 | | | |
| 6328-2 | 0.48 | 1.57 | 4.49 | 14.72 | 6.71 | 22 | 5.185 | 28 | | | |
| 6330-2 | 0.48 | 1.57 | 5.1 | 16.72 | 7.31 | 24 | 9.14 | 30 | | | |
| 6332-2 | 0.48 | 1.57 | 5.71 | 18.72 | 7.92 | 26 | 9.75 | 32 | | | |
| 6336-2 | 0.48 | 1.57 | 6.32 | 20.72 | 9.14 | 30 | 10.97 | 36 | | | |
| 6340-2 | 0.48 | 1.57 | 6.92 22.72 | | 10.36 | 34 | 12.19 | 40 | | | |
| Avai | Available Sizes: 16', 20', 24', 28', 30', 32', 36', & 40' ft | | | | | | | | | | |

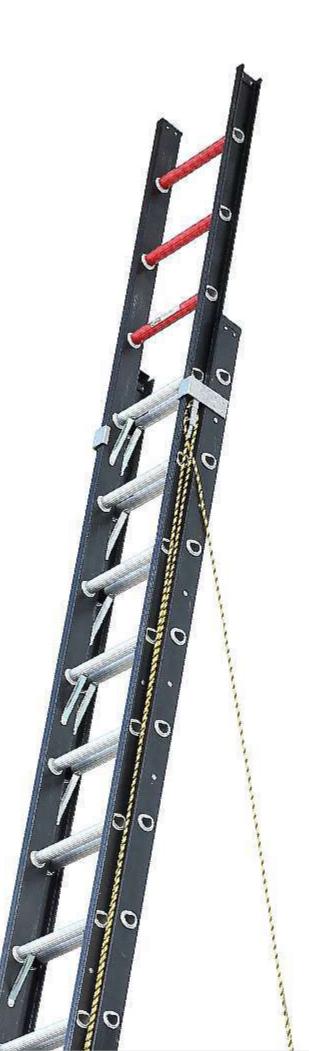


- Mar-resistant end caps
- Top 3 rungs in red colour to indicate "do not claim"
- Rope operated ladder with
 premium heavy duty rung locks
- Heavy duty ribbed swivel feet with ice pick
- All "O" rungs / "D" rungs are slip resistant serrated rungs for durability & extra strength

6300-2 Series

300lbs Type IA Ideal for painting, carpentry and odd jobs extra heavy duty



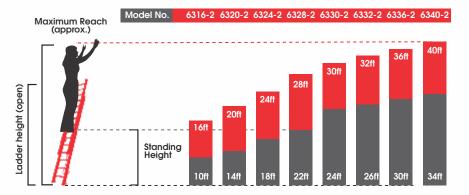





Extension Ladders

Sumostance Fiberglass



| SUMO SERI | ES FIBE | RGLAS | S EXTEN | ITION L | ADDER | S - SPE | CIFICA | TIONS | | | | |
|------------------------|--|---------|---------|-----------------|-------------|------------------------------|-------------------|-------|--|--|--|--|
| Extention Ladder No | Extention Min Height | | | ntion leight | Hig Stan | ntion hest ding vel | Storage Height | | | | | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | | | | |
| SUMO 16 | 2.74 | 5 | 4.87 | 16 | 2.5 | 8.4 | 2.92 | 9.6 | | | | |
| SUMO 20 | 3.35 | 3.35 11 | | 20 | 3.71 | 12.2 | 3.53 | 11.6 | | | | |
| SUMO 24 | 3.96 | 13 | 7.31 | 24 | 4.90 | 16.1 | 4.14 | 13.6 | | | | |
| SUMO 28 | 4.57 | 15 | 8.5 | 28 | 5.82 | 19.11 | 4.75 | 15.6 | | | | |
| SUMO 32 | 5.18 | 5.18 17 | | 32 | 7.04 | 23.1 | 6.58 | 21.6 | | | | |
| | Available Sizes: 16', 20', 24', 28' & 32' ft | | | | | | | | | | | |



- Reduces ladder weight up to 15% over ordinary extension ladders
- Adjust 9" on each side over uneven ground
- Built-in levels ensure level rungs and proper lean angle; work from a safe, stable setup every time
- Compact storage outriggers retract to sleek storage profile




Sumo Series


375lbs Type IAA

Ideal for painting, carpentry and odd jobs extra heavy duty

Little



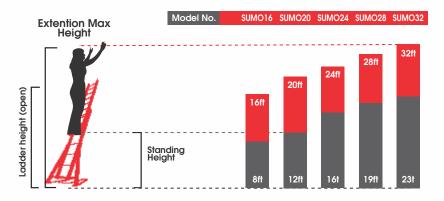

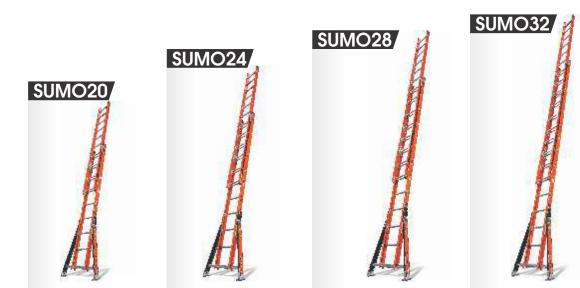



Combination Ladders

00

đ.

0

Aluminium ANSI 14.2








| Combination Ladder No | Size | | Extension Max Height | | Stan | | Max Reach Self Supporting | | Standing | | Max reach Wall reclining | |
|-----------------------------|------|-----|-------------------------|-----|------|-----|---------------------------------|-----|----------|-----|--------------------------------|-----|
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. | Mts. | Ft. |
| 2003 | 0.91 | 3 | 1.52 | 5 | 0.30 | 1 | 2.13 | 7 | 0.60 | 2 | 2.13 | 7 |
| 2004 | 1.21 | 4 | 2.13 | 7 | 0.60 | 2 | 2.43 | 8 | 1.21 | 4 | 2.74 | 9 |
| 2005 | 1.52 | 5 | 2.74 | 9 | 0.91 | 3 | 2.74 | 9 | 1.82 | 6 | 3.35 | 11 |
| 2006 | 1.82 | 6 | 3.35 | 11 | 1.21 | 4 | 3.04 | 10 | 2.43 | 8 | 4.57 | 13 |
| 2008 | 2.43 | 8 | 4.57 | 15 | 1.82 | 6 | 3.65 | 12 | 3.65 | 12 | 5.18 | 17 |
| 2010 | 3.04 | 10 | 5.79 | 19 | 2.43 | 8 | 4.26 | 14 | 4.87 | 16 | 6.40 | 21 |

- Slotted tool top with hook lock
- Solid hinge Plates
- Strong spreaders
- Slip resistant serrated extra wide steps
- Extra step braces on bottom steps
- Clips store spreaders work neatly when used as extended ladder
- Slip- resistant wall bumpers
- Slip-resistant safety shoes
- Can be used as a frame & wall reclining ladder





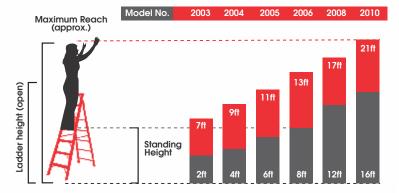





Combination Ladders

Multipurpose Aluminium





| MULTI | PURP | OSE C | OMB | NATIC | on la | DDER | S - SP | ECIFIC | CATIO | NS |
|-----------------------------|---------------------------|-------|-------------|--|-------|------------------------|------------|--------|---------------------|--------------------------|
| Combination Ladder No | Step Ladder Max Height | | Heig Iea | Standing Height as lean to ladder | | Reach an to Ider | Base Width | | Folded Dimension | |
| | Mts. | Ft. | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| 3942065 | 2.3 | 7.54 | 4.7 | 15.41 | 6.5 | 21.32 | 0.97 | 3.18 | | 0.97 x 0.27 x 1.28 |

Available Sizes: 7.5' 15' & 21' ft

- Lean-to, trestle and staircase ladder in one.
- Only a few actions needed to convert from one to the other.
- Rung by rung height adjustment in all versions.
- High strength quality triple formed connection between rungs and stiles.
- Folds down to a space-saving compact size for transport.




All Rounder Ladder

300lbs Type IA

The Complete Maintenance Ladder, Ideal for Staircases







Combination Ladders

Skymaster Aluminium










| SKY N | IASTER | R CON | IBINA | TION L | ADDE | RS - S | PECIFI | CATIC | DNS | | |
|-----------------------------|----------------------|---------------------------------------|--|--------|---------------------------|--------|----------------|---------------------------------|------|--|--|
| Combination Ladder No | Len as a sin | lder Igth 3 part gle Ider | Length as a 2 Part single ladder | | Length of ladder parts | | Stile depth | Horizantal Stabilizer bar | | | |
| | Mts. | Ft. | Mts. | Ft. | Mts. Ft. | | MM | Mts. | Ft. | | |
| 741521 | 5.8 | 19.02 | 4.1 | 13.45 | 2.45 8.03 | | 73 | 0.9 | 2.95 | | |
| | Available Sizes: 10' | | | | | | | | | | |

Available Sizes: 19

- Top section with parking hooks and locking mechanism.
- Strong nylon restraint strap with sewn-in fixing tab.
- Optimum guide connection that encompasses the whole stile.
- Locking mechanism and guides are bolted in so that they can be replaced.
- High strength quality triple formed connection between rungs and stiles.
- Can be used on steps / stairs.





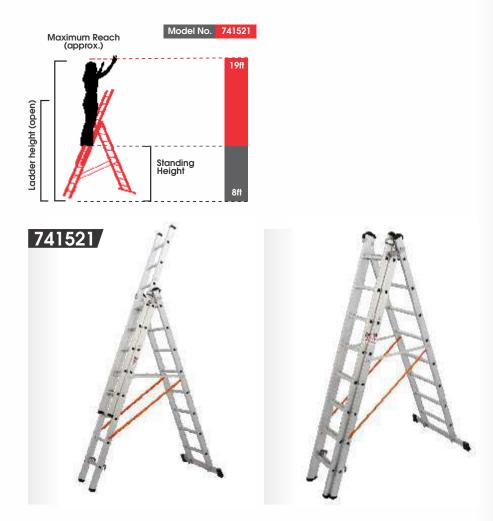



Articulating Ladders

Velocity Aluminium





NAMES OF TAXABLE PARTY AND ADDRESS

7.01 Available Sizes: 11, 15, 19 & 23

23

5.94

19.5

2.04

6.7

8

2.43

11.1

3.38

M26

- Patented rock locks enable
 faster setup and faster takedown
- Tip & glide wheels make them easy to move
- Lighter weight 15% lighter than the competition
- Legendary safety and versatility of the original Little Giant Ladder




Velocity Series 300lbs Type IA

Ideal for painting, carpentry and odd jobs

Little Giant Linder Systems



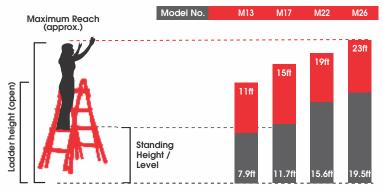











Articulating Ladders

Select Step Aluminium

Ş



| Articulating Ladder No | Size | | Width | | Highest Standing Level | | Maximum Reach | |
|------------------------------|------|-----|-------|------|------------------------------|-----|------------------|------|
| | Mts. | Ft. | Mts. | Ft. | Mts | Ft. | Mts. | Ft. |
| 15009 | 1.21 | 4 | 0.33 | 1.11 | 0.94 | 3.1 | 3.13 | 10.3 |
| 15125 | 1.82 | 6 | 0.85 | 2.8 | 2.34 | 7.7 | 4.26 | 14.1 |
| 15109 | 1.52 | 5 | 0.67 | 2.2 | 1.76 | 5.8 | 3.71 | 12.2 |

Giant Ladder S

Available Sizes: 4', 6' & 5' ft

- A comfortable ladder
- Lightweight yet extremely strong (Type IA 300 lbs ANSI rating)
- The built-in no-pinch Comfort Step™ provides a huge, comfortable standing platform that literally feels like you're standing on solid ground
- Each side telescopes incrementally so you have the flexibility to work on staircases or sloping ground as well as even surfaces
- A versatile top cap complete with integrated tool slots and work tray




SStep Series

300lbs Type IA

Ideal for painting, carpentry and odd jobs





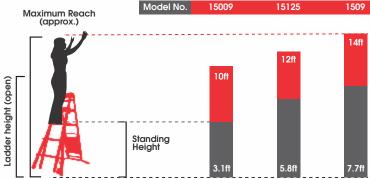









Authorized Channel Partners



CHENNAI

Address:- Old No 158 New No. 325, Linghi Chetty Street, Channi-600001. Branch (Sriperumbdur):- 29, Panjalpettu Village, Chennai Bangalore Highway, Sriperumbudur, Tamilnadu-602105 Email:- info@madrastools.net Phone:- +91-98401-79451, +91- 80158-44478 GST No:- 33AAAPN9529P1Z6 MSME:- UDYAM-TN-02-0054132

PUNE

Address:- Shop No 2, 1045, Vishwashanti Building, Raviwar Peth, Pune - 411002 Branch (Talegaon):- Shop No: 1,2,3,4 Block Sector, Katavi Distric, Talegaon Dabhade, Pune - 450506 Email:- madrastoolspune@gmail.com Phone:- +91-84464-47152, +91- 98404-22553 GST No:- 27EVSPM6059N1ZG MSME:- UDYAM-MH-26-0345577