



CATALOGUE2022

EN



wiha
Tools that work for you



Authorized Channel Partners



CHENNAI

Address:- Old No 158 New No. 325, Linghi Chetty Street, Chenni-600001.
Branch (Sriperumbdur):- 29, Panjalpettu Village, Chennai Bangalore Highway, Sriperumbudur, Tamilnadu-602105
Email:- info@madrastools.net
Phone:- +91-98401-79451, +91- 80158-44478
GST No:- 33AAPN9529P1Z6
MSME:- UDYAM-TN-02-0054132

PUNE

Address:- Shop No 2, 1045, Vishwashanti Building, Raviwar Peth, Pune - 411002
Branch (Talegaon):- Shop No: 1,2,3,4 Block Sector, Katavi Distric, Talegaon Dabhade, Pune - 450506
Email:- madrastoolspune@gmail.com
Phone:- +91-84464-47152, +91- 98404-22553
GST No:- 27EVSPM6059N1ZG
MSME:- UDYAM-MH-26-0345577



Ranges	Torque	Pliers	Impact tools
L-keys			Measurement tool
Screwdrivers			General information
Bits			

Subject to technical changes. All illustrations and graphics, specified dimensions and values and references to standards, e.g. DIN/EN, are non-binding. Any liability claims based on this will therefore be rejected. No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue. All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited. Our General Terms and Conditions (Terms of Sale, Delivery and Payment) apply. You will find our general terms and conditions at www.wiha.com.



Wiha – our goal: your success

- **Your guarantee for quality**

Winner of the Manufacturing Excellence Awards 2014 as the best SME in Germany.

- **Reliable and dependable**

German family-owned company with more than 80 years of experience.

- **Your advantage**

Customised problem-solving for professionals.

- **Cutting-edge technology**

Award-winning innovations valued by professionals throughout the world.

What makes your work easier? Tools that increase your efficiency, reduce costs and preserve your health. This is why Wiha develops, designs and manufactures products that meet the highest functionality, durability and ergonomic demands.

Founded over 80 years ago as a small family-owned business for standard parts and screws, Wiha has grown to become a global company with factories all over Europe, Asia and the United States and are still owner-operated by the Hahn family.

Wiha offers the professional a wide range of high-quality premium tools, characterized by their use of the latest manufacturing technologies, application-oriented innovations, ergonomic superiority, top quality, absolute reliability and long service life. In short, tools that make your work noticeably easier - tools that work for you.

Learn more about Wiha on our website:

www.wiha.com



wiha 
Tools that work for you



Wiha visions and values

With responsibility and innovation, Wiha is set for a successful future.

What makes a company successful? Providing excellent products and having a good company culture are key. The high quality of Wiha tools in their form and functionality is confirmed by the many international awards they have received. As an owner-operated family-owned company, we foster a culture of togetherness. From employee development to active customer management, Wiha does everything they can to create optimum working and business conditions and a foundation for sustainable success.

As a member of the BME Compliance Initiative, Wiha complies with a code of conduct which obligates the company to follow business conduct rules, principles of social responsibility and the obligation to promote suppliers, ensuring the lawful behaviour of the company and its employees.

In 2016, Wiha was crowned one of the TOP 100 most innovative mid-sized companies in Germany. Thanks to their practised culture of innovation, Wiha was able to succeed at the competition held as part of the "German Mid-Sized Company Summit." We took this as encouraging confirmation of our company philosophy, which focusses on progress and vision.

Wiha – our visions

- **A financially successful family-owned company**

For more than 80 years, Wiha has been a successful owner-operated company in the market.

- **Premium international brand**

Wiha supplies an international market from factories in Europe, Asia and the USA.

- **Highly motivated first-class team:**

Wiha employees are competent, committed and motivated thanks to their optimum working conditions.

- **User- and application-focused:**

Wiha products enable the user to work in an efficient and health-friendly way.

Wiha design awards

Ergonomics, highly prized by all.



german
brand
award
19
winner



reddot winner 2019
best tools brand



To us, positive feedback from people for whom we make our tools is the most rewarding confirmation of our work. All the same, we can also be more than a little proud when the high ergonomic quality of our products is confirmed at the "highest" level, as many of them have been distinguished with coveted design awards. In addition to this, our company and production quality were also honoured with awards. With this praise and confirmation from every direction, it's no wonder that Wiha are on the right track with ergonomic tool concepts and a future-oriented philosophy.

2022



2021



2020



Focus Open 2020
Special Mention



2019



2018



Focus Open 2018
Special Mention



Wiha tools with AGR approval

The world's first tools awarded the seal of approval for efficient and health-preserving work.



Geprüft und empfohlen vom Forum: Gesunder Rücken - besser leben e.V. und dem Bundesverband deutscher Rückenschulen (BdR) e.V. Weitere Infos bei: AGR e.V., Stader Str. 6, 27432 Bremervörde, Tel. 04761/92 63 580, www.agr-ev.de



Ergonomic excellence! Wiha is the world's first hand tool manufacturer to receive the AGR seal for its Inomic® pliers and ergonomic handle design on screwdrivers. This distinction enjoys broad acceptance by medical professionals


Ergonomic excellence - The Wiha screwdriver handle size concept and Wiha Inomic® pliers handle concept. When you are the first hand tool manufacturer in the world to have products distinguished with the renowned AGR quality seal, it's a sensation. Very few everyday objects are able to pass the stringent tests of the AGR, whose seal enjoys broad acceptance by medical professionals for very good reason.

For years, the AGR have been dedicated to promoting and researching the prevention of back pain and they offer recommendations on products which help to prevent musculoskeletal disorders and back pain.



Wiha have now been officially recognised for their ergonomic screwdriver handle size concept and Inomic® pliers handle concept. To us, this distinction is confirmation of our philosophy: To develop tools enabling the professional to not only work efficiently, but also in a health-preserving way. Wiha's screwdriver handle size concept features four handle sizes and lengths, each optimally suited to its respective fastening or work task to ensure healthy work. The angled "pistol handle" of the Wiha Inomic® pliers handle concept relieves the user's wrist while working.

Both handle concepts help users to reduce, or even fully prevent, discomfort in their musculoskeletal system and pain in their joints and muscles. The result? With Wiha, your work is easier, you don't get fatigued as quickly, you work more efficiently and you simply feel better at the end of the working day. As our campaign logo motto goes: "I feel Wiha!"

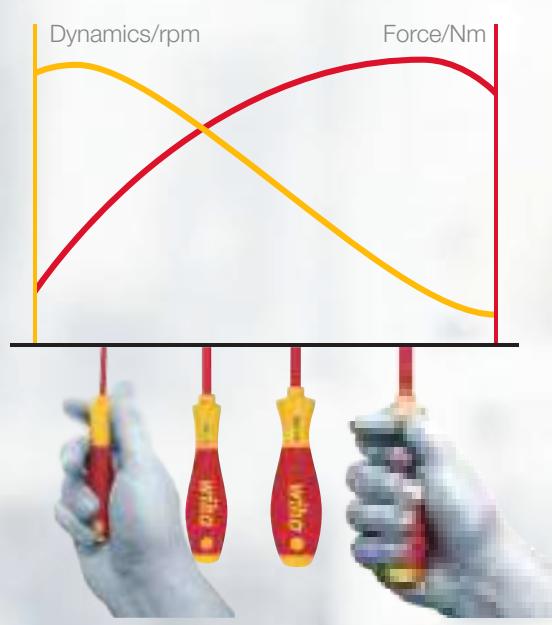

Wiha SoftFinish® handle sizes

Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.

Quick-turning - Motor skills are consistently taken into consideration.

Maximum power transmission, comfortable to use and without loss.

Maximum power transmission, comfortable to use and without loss.

To work safer, more efficiently and with less strain on the body.

Certified safety – from our own safety testing procedure according to IEC standards.

Voltage testing: All Wiha VDE-tools, which have special markings, are individually tested at 10,000 V AC and are approved for 1,000 V AC and 1,500 V DC.

Cold shock test: Cooling down to -25° C. The skinning material must retain its toughness, so that it doesn't break when subjected to shock and knocks.

Test of electrical skinning properties: 24 hours storage in water, then 3 minutes test at 10,000 V AC. There must neither be flashover nor disruptive discharge.

Test of the adhesion of the skinning material coating: 168 hours storage at 70° C, then test of adhesion at 500 N.

Pressure tests: Test at 20 N pressure load, 70° C temperature and 5,000 V AC test voltage. No disruptive discharge may occur.

Test of combustion behaviour: The tools are subjected to a flame for 10 seconds. The skinning material must then extinguish and not continue to burn.

Safety note

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulated tools
- insulating safety mechanisms

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- ensure power is switched off
- cover or block off adjacent live components
- secure against reconnection
- earth and short-circuit

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.



As an internationally recognized institute, the VDE is responsible for the testing and certification of electrotechnical products. Wiha provides the professional with a broad range of VDE products, developed and continuously optimized specifically for electricians, which also provide application-oriented solutions for everyday use.

The Wiha quality-management system according to ISO 9001:2015 ensures that only first-class products are manufactured – and that you can work with products of excellent quality. To ensure maximum safety for the user, the entire Wiha VDE range must undergo the most stringent inspections and individual tests. All Wiha VDE-tools hold multiple certifications: The VDE-GSmark stands for safety with regard to any risk, from electrical right up to radiological. Products labelled with a double triangle and a voltage range are suitable for work with live parts.

The international standard IEC 60900 defines the construction, safety as well as single, series, and random testing of insulated tools. But with Wiha you don't just work safer, but also healthier and more efficiently. Specially developed ergonomic geometries ensure comfortable handling that protects the body from strain. The result: easier work, less signs of fatigue, more efficiency.



SHOWTIME STARS FOR ALL APPLICATIONS


STARS FOR ELECTRICIANS



STARS FOR MECHANICS



Content

	Tool case set XXL III electric assorted 106-pcs. incl. case Page 97		Tool set service technician assorted 31-pcs. incl. bag Page 100		Tool set slimVario® electric mixed, 32 pcs. incl. multifunctional bag Page 101		Tool set electrician Mixed, 13-pcs. incl. tool pouch Page 102
	E-screwdriver, speedE® II electric 7 pcs with slimBits, batteries and USB charger in L Boxx Mini Page 120		E-screwdriver, starter set speedE® I electric 4-pcs. incl. slimBit, battery and USB charger Page 120		speedE® Industrial e-screwdriver set TORX®, 5-pcs. with bit, battery and USB charger Page 123		Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries Page 124
	Screwdriver and bit set slimVario® screwdriver Page 130		slimBit electric bit set Slotted, 7-pcs. incl. SlimBit box Page 136		Screwdriver SoftFinish® electric slotted Page 140		Screwdriver SoftFinish® Slotted with round blade for low-lying screws Page 147
	Torque screwdriver set TorqueVario®-S electric Page 164		Torque screwdriver TorqueVario®-S electric Page 166		Torque screwdriver with T-handle TorqueVario®-S T electric Page 171		Torque screwdriver iTorque® with digital scale Page 172
	Screwdriver with bit magazine LiftUp electric Page 186		Screwdriver with bit magazine LiftUp 26one® Mixed with 13 double bits 1/4" in blister pack Page 187		Screwdriver with bit magazine Stubby Mixed with 7 double bits Page 187		Multitool PocketStar assorted 9-pcs. Page 190
	L-key set in ErgoStar holder Page 206		L-key set in ProStar holder Matt chrome-plated hexagonal ball end with short shaft, 10-pcs. Page 208		L-key set in ProStar holder Hexagonal ball end matt chrome-plated 10-pcs. Page 208		L-key set in ErgoStar holder TORX® MagicSpring®, 14- pcs., black oxidised Page 211
	BitBuddy® TY bit set, 49 mm Pozidriv 8-pcs. 1/4" E6,3 Page 232		XLSelector T bit set, 25 mm Phillips, TORX®, hex 32-pcs. 1/4" C6,3 Page 236		XLSelector Y bit set, 25 mm TORX® 32-pcs. 1/4" C6,3 Page 238		TY bit set 29 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 235
	Nut driver and bit set 1/4" and 1/2" 60 pcs. incl. L Boxx Page 266		Nut driver and bit set 1/4" 40 pcs. incl. multifunctional bag with belt clip Page 267		Ratchet wrench set, 1/4" 17 pcs. incl foam insert Page 268		Ratchet wrench set, 1/2" 26 pcs. incl foam insert Page 268
	Installation pliers TriCut Professional electric 1/4" in blister pack Page 275		Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable Page 276		Plier wrench Professional electric Page 282		Automatic crimp toolFor wire-end sleeves square crimping with rotating crimping head Page 287
	Soft-faced hammer set "Safety" with assorted hammer faces, 8-pcs. in box Page 324		Soft-faced hammer "Safety" medium soft/hard Page 325		Soft-faced hammer dead-blow, medium hard Page 328		Electrician's hammer with 300 g hammer head, in blister pack Page 330
	Stripping and crimping tool set 4-pcs. with cable connectors 2,600 pcs. colour code DIN in assortment box Page 336		Stripping and crimping tool set 5-pcs. with wire end ferrules 500 pcs. colour code DIN in L-Boxx Mini Page 337		Wire-end sleeves display Colour code DIN, 0.5 - 10 mm² in polyester bag and 0.5 - 16 mm² in organiser box Page 338		Wire end sleeves with plastic collar set 0.5-2.5 mm², 400 units, DIN colour code, in dispenser Page 339



 <p>Ratchet wrench set insulated 1/2" 21-pcs. incl. case Page 105</p>	 <p>Single open-end spanner set, insulated 6-32 mm 21-pcs. incl. case Page 106</p>	 <p>Tool set mechanic Mixed, 34-pcs. incl. tool pouch Page 111</p>	 <p>Tool set ESD Pliers, screwdriver, tweezers, 10-pcs. incl. tool pouch Page 113</p>
 <p>Single-pole, non- contact voltage tester volt detector, explosion protected 12-1,000 VAC Page 125</p>	 <p>Torque QuickCheck torque testing device set 4 pcs. with adapter blades, batteries, and box Page 126</p>	 <p>Voltage and continuity tester, 12 – 1,000 V AC, CAT IV incl. 2x AAA batteries Page 125</p>	
 <p>Screwdriver SoftFinish® Slotted with short round blade Page 152</p>	 <p>Fine screwdriver set PicoFinish® Slotted, Phillips 7-pcs. Page 153</p>	 <p>Screwdriver MicroFinish® TORX® with round blade Page 156</p>	 <p>Screwdriver SoftFinish® ESD Slotted Page 158</p>
 <p>Torque screwdriver TorqueFix® Page 174</p>	 <p>Torque screwdriver with T-handle TorqueVario®-S T Page 178</p>	 <p>Torque screwdriver TorqueVario®-S ESD Page 181</p>	
 <p>Nut driver insert gripper 3/8" in blister pack Page 194</p>	 <p>Screwdriver with interchangeable blade set SYSTEM 6 Page 195</p>	 <p>Screwdriver with interchangeable blade set SYSTEM 4 ESD, Page 202</p>	 <p>Screwdriver with interchangeable blade set SYSTEM 4 Page 200</p>
 <p>L-key set in ProStar holder TORX®, 14-pcs., black oxidised Page 214</p>	 <p>L-key set in Classic holder TORX®, 9-pcs., short, black oxidised Page 214</p>	 <p>L-key with T-handle ComfortGrip Page 216</p>	 <p>L-key with key handle TORX®, black oxidised Page 217</p>
 <p>T bit set, 25 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 237</p>	 <p>Y bit set, 25 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 240</p>	 <p>Bit Professional Slotted 1/4" E6,3 Page 250</p>	 <p>Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box Page 260</p>
 <p>Ring ratchet open- ended spanner set 13 pcs. switchable, with holder Page 270</p>	 <p>Ring ratchet open- ended spanner set 13 pcs. with holder Page 270</p>	 <p>Ring ratchet open- ended spanner set 8 pcs. with holder Page 271</p>	 <p>Double open-end spanner set 13 pcs. with holder Page 271</p>
 <p>Stripping tool automatic up to 16 mm² in blister pack Page 284</p>	 <p>Professional BiCut® high-performance diagonal cutters with DynamicJoint® Page 291</p>	 <p>Pliers wrench Classic Page 300</p>	 <p>Pliers set Professional ESD Page 308</p>
 <p>SoftFinish® dowel racket set with dowels with 6 mm round blade in blister pack, 5-pcs. Page 330</p>	 <p>Electrician's spirit level 40 cm Page 331</p>	 <p>Electrician's Longlife® folding ruler, 2 m metric, 10 segments Page 332</p>	
 <p>Twin wire end sleeves with plastic collar set 2 x 0.75 - 2 x 2.5 mm², 200 units, DIN colour code, in dispenser Page 339</p>	 <p>Wire end sleeves with plastic collar set 100 units, colour code 1 (FR) / DIN Page 340</p>	 <p>Twin wire end ferrules with plastic collar 100 units, colour code 1 (FR) & DIN Page 342</p>	 <p>Type cable socket, ring-shaped, insulated 100 units as per DIN Page 344</p>





Tool case set XXL III
electric assorted
106-pcs. incl. case
Order no. 44128
Page 97



Trolley for rugged terrain and stairs



Workbench and step function




V-shaped notch with scale in the case lid



The perfect complement!

E-screwdriver, speedE® II electric
Order no. 44318 Page 120

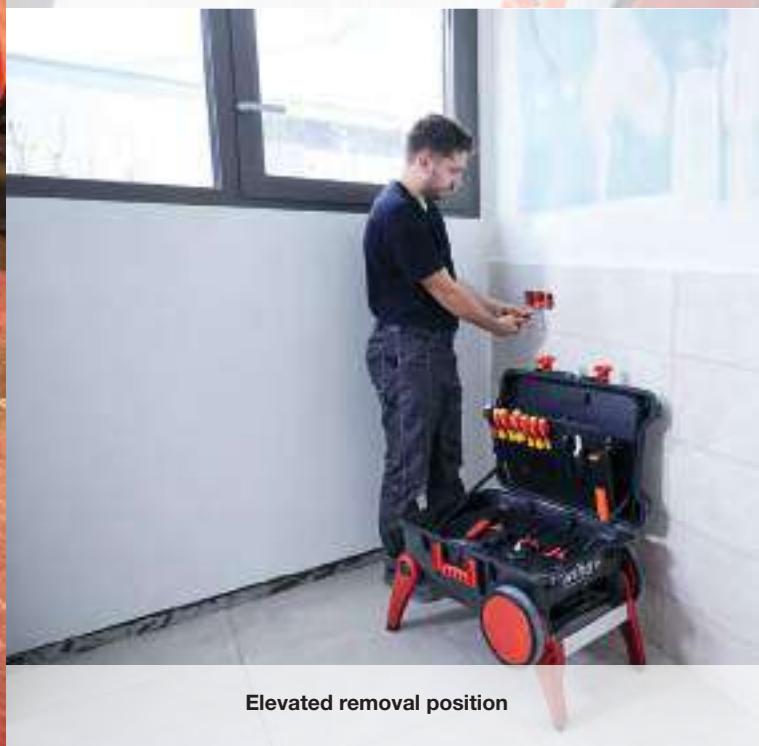

Elevated removal position



Screwdriver recommended by physicians and therapists



Tool set electrician
Competence XL
Order no. 40523
Page 98



Robust case



Insulated torque tool included



Tool set slimVario® electric

Order no. 43465

Page 101




Work bench stand function




Extensive insulated replacement bit system



E-screwdriver,
speedE® II electric
Order no. 44318
Page 120

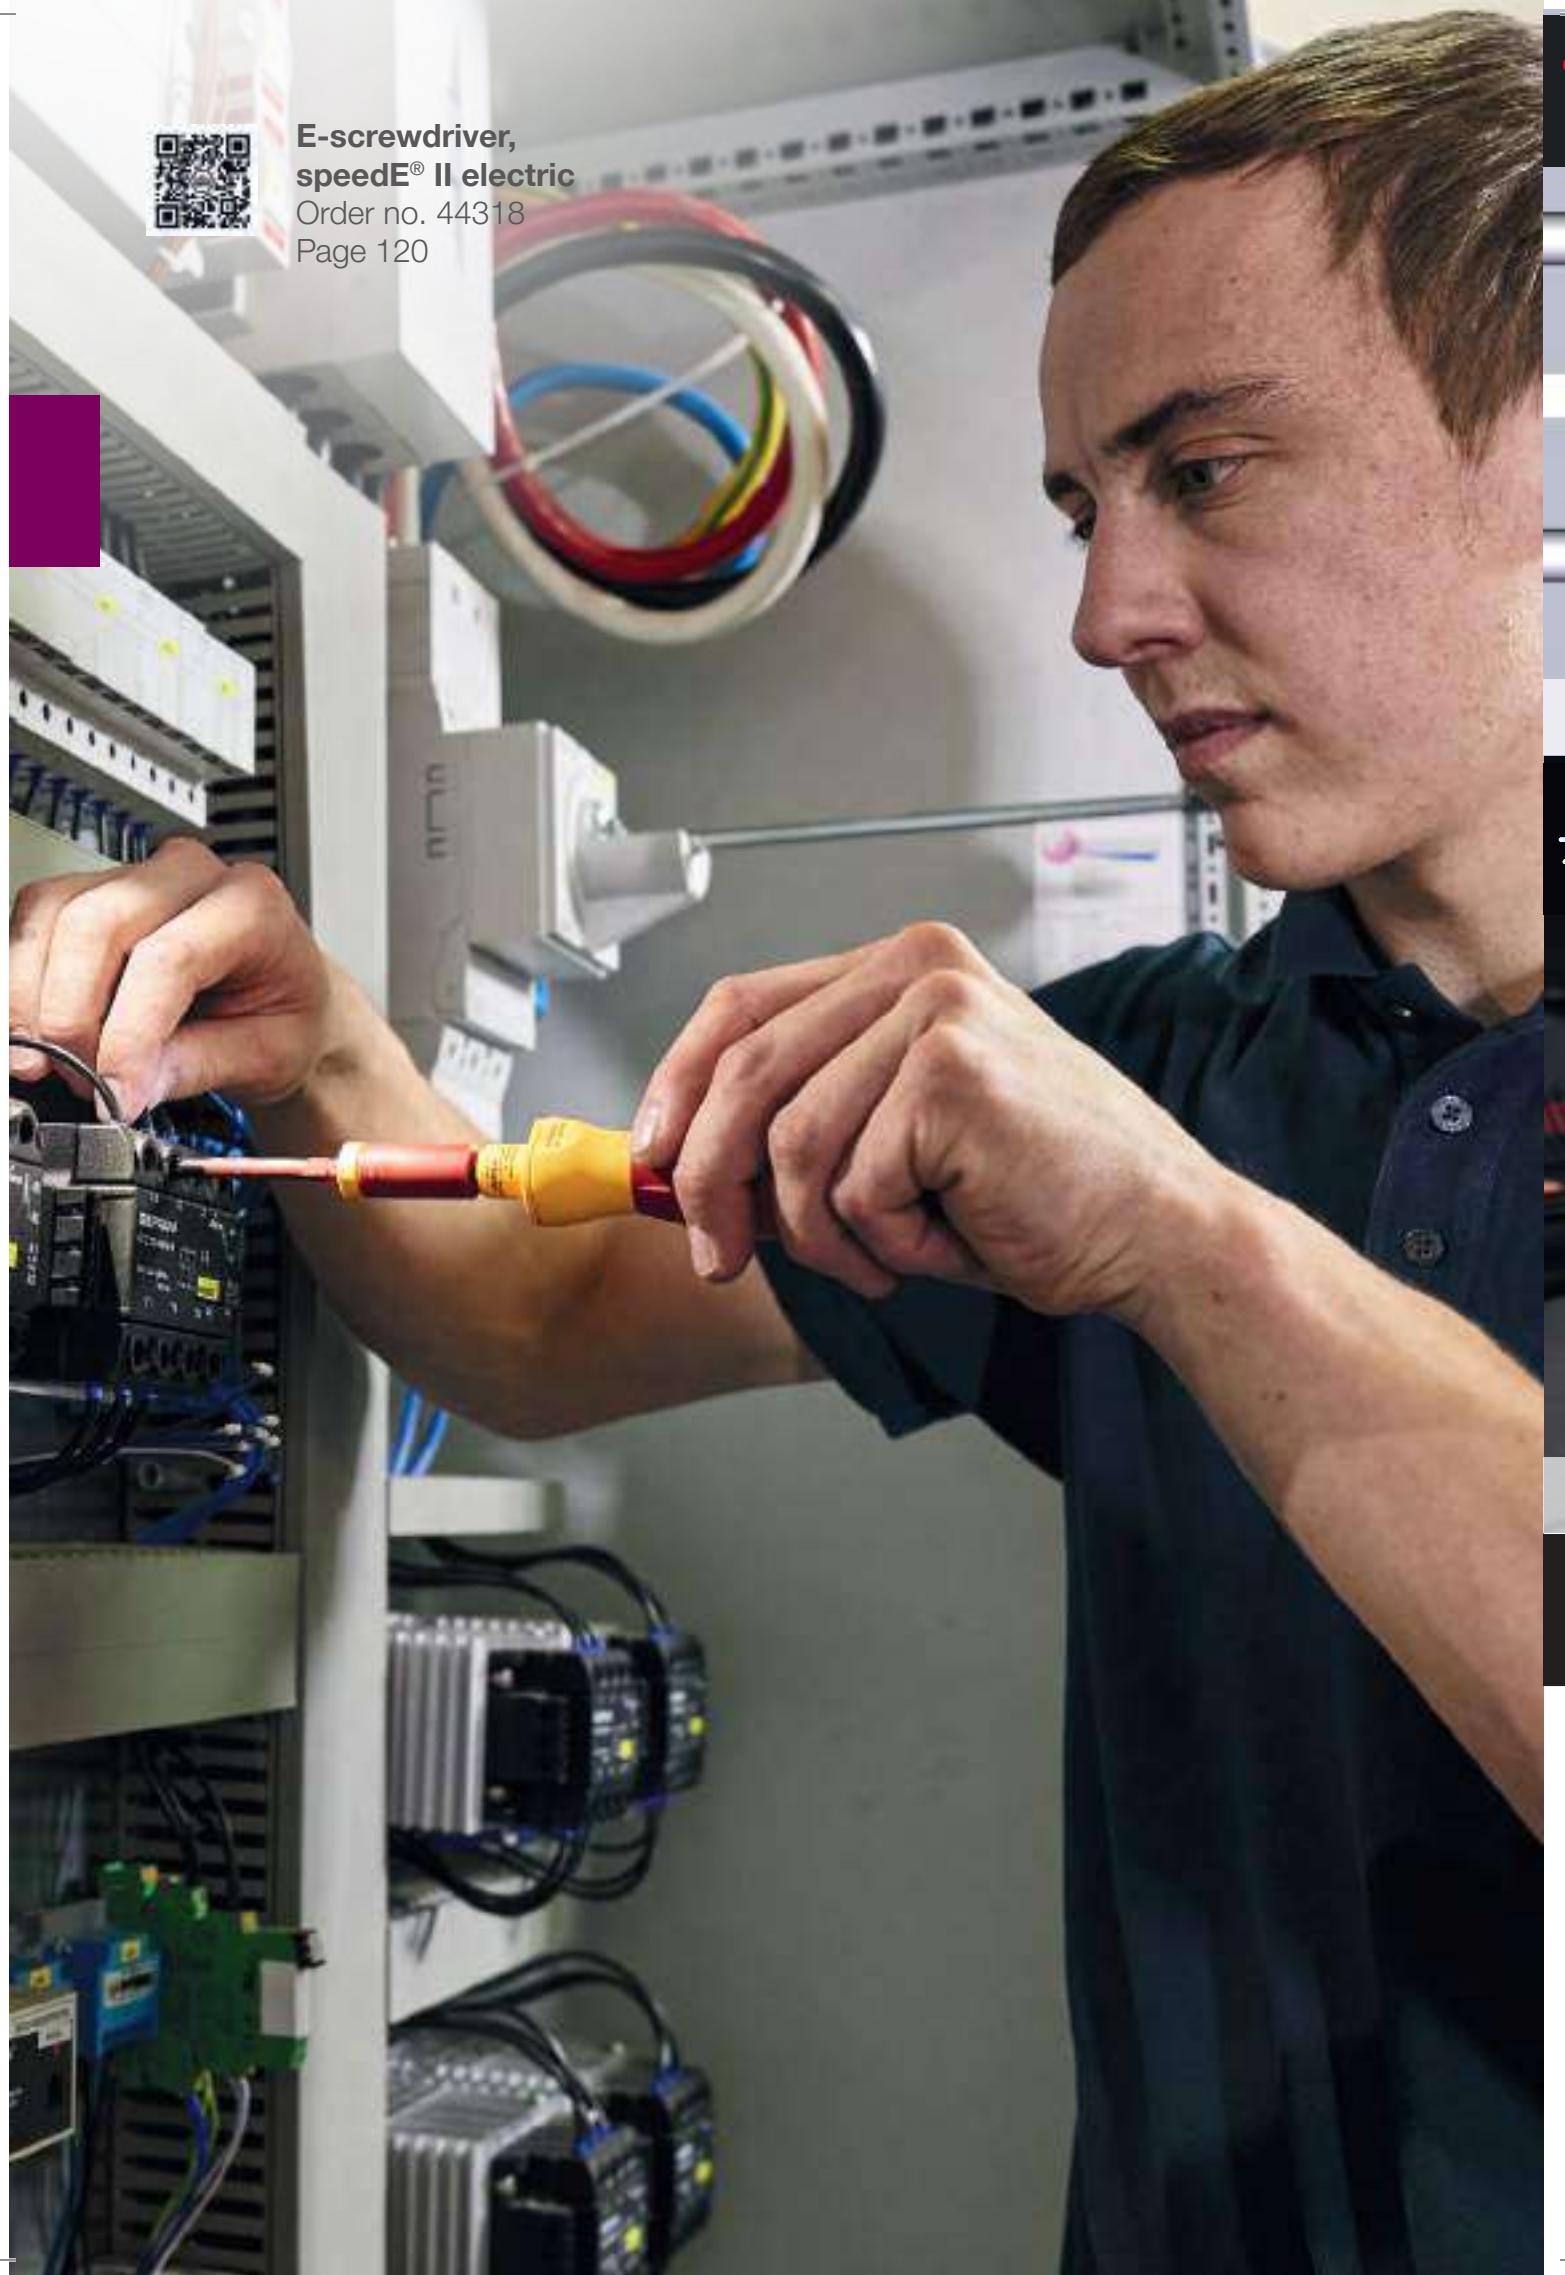


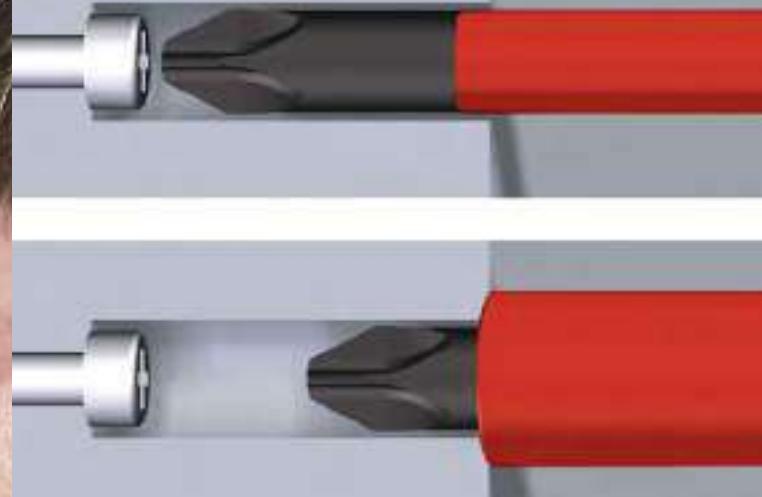

Insulated slimBits



Can be operated in all positions thanks to a ring switch

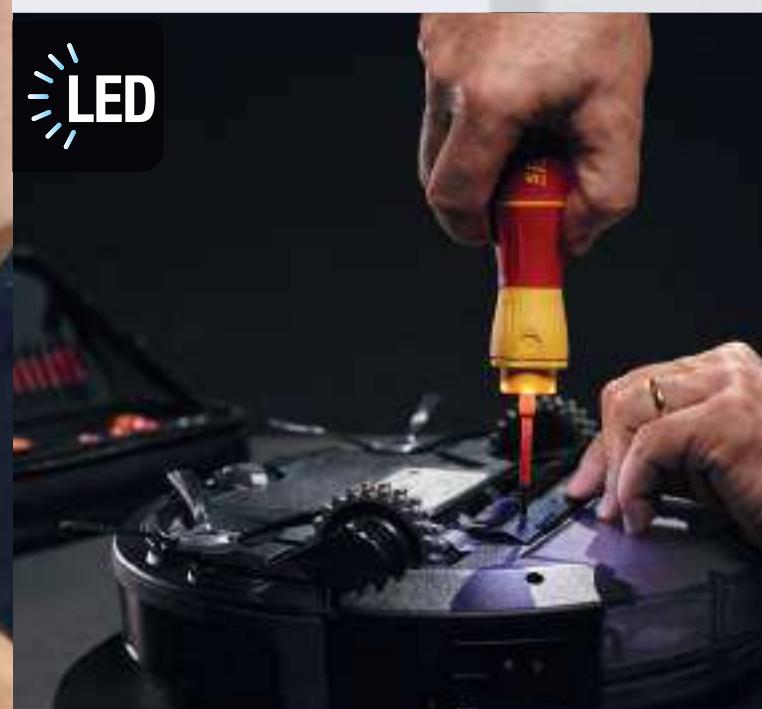

Shadow-free illumination



The perfect complement!

Screwdriver with bit magazine LiftUp electric
Order no. 41234 Page 186



Screwdriver recommended by physicians and therapists




Safe, VDE-certified tools up to 1,000 V AC

**Flashlight with LED,
laser and UV light**
Order no. 41286
Page 124





Magnetic flashlight base and retaining clip for fastening

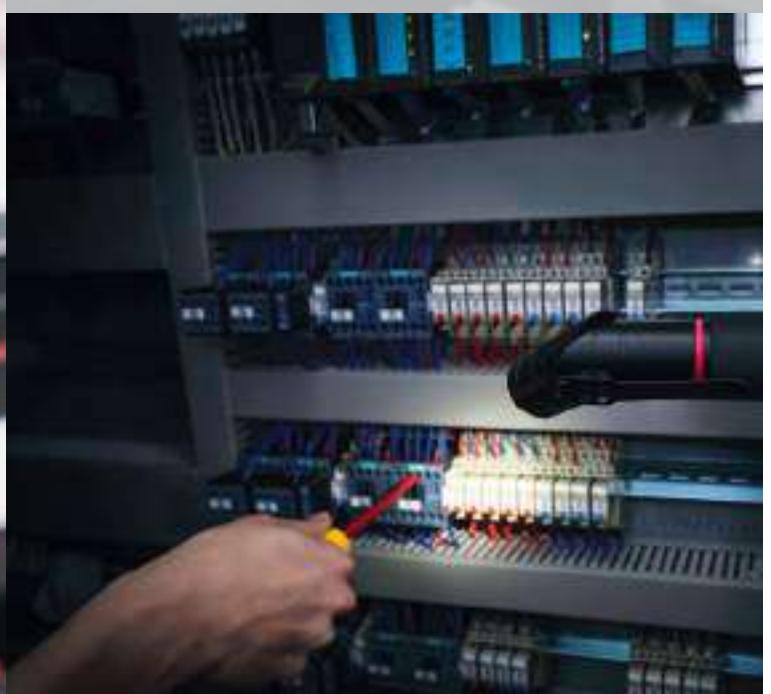

Swiveling flashlight head



3 in 1: powerful LED light, laser function and UV light

Torque QuickCheck
torque testing device set
Order no. 42086
Page 126



Mobile checking of torque tools



Easy check with traffic light symbols




Screwdriver and bit set
slimVario® screwdriver
Order no. 41231
Page 130



A sturdy bag included



Extensive insulated replacement bit system

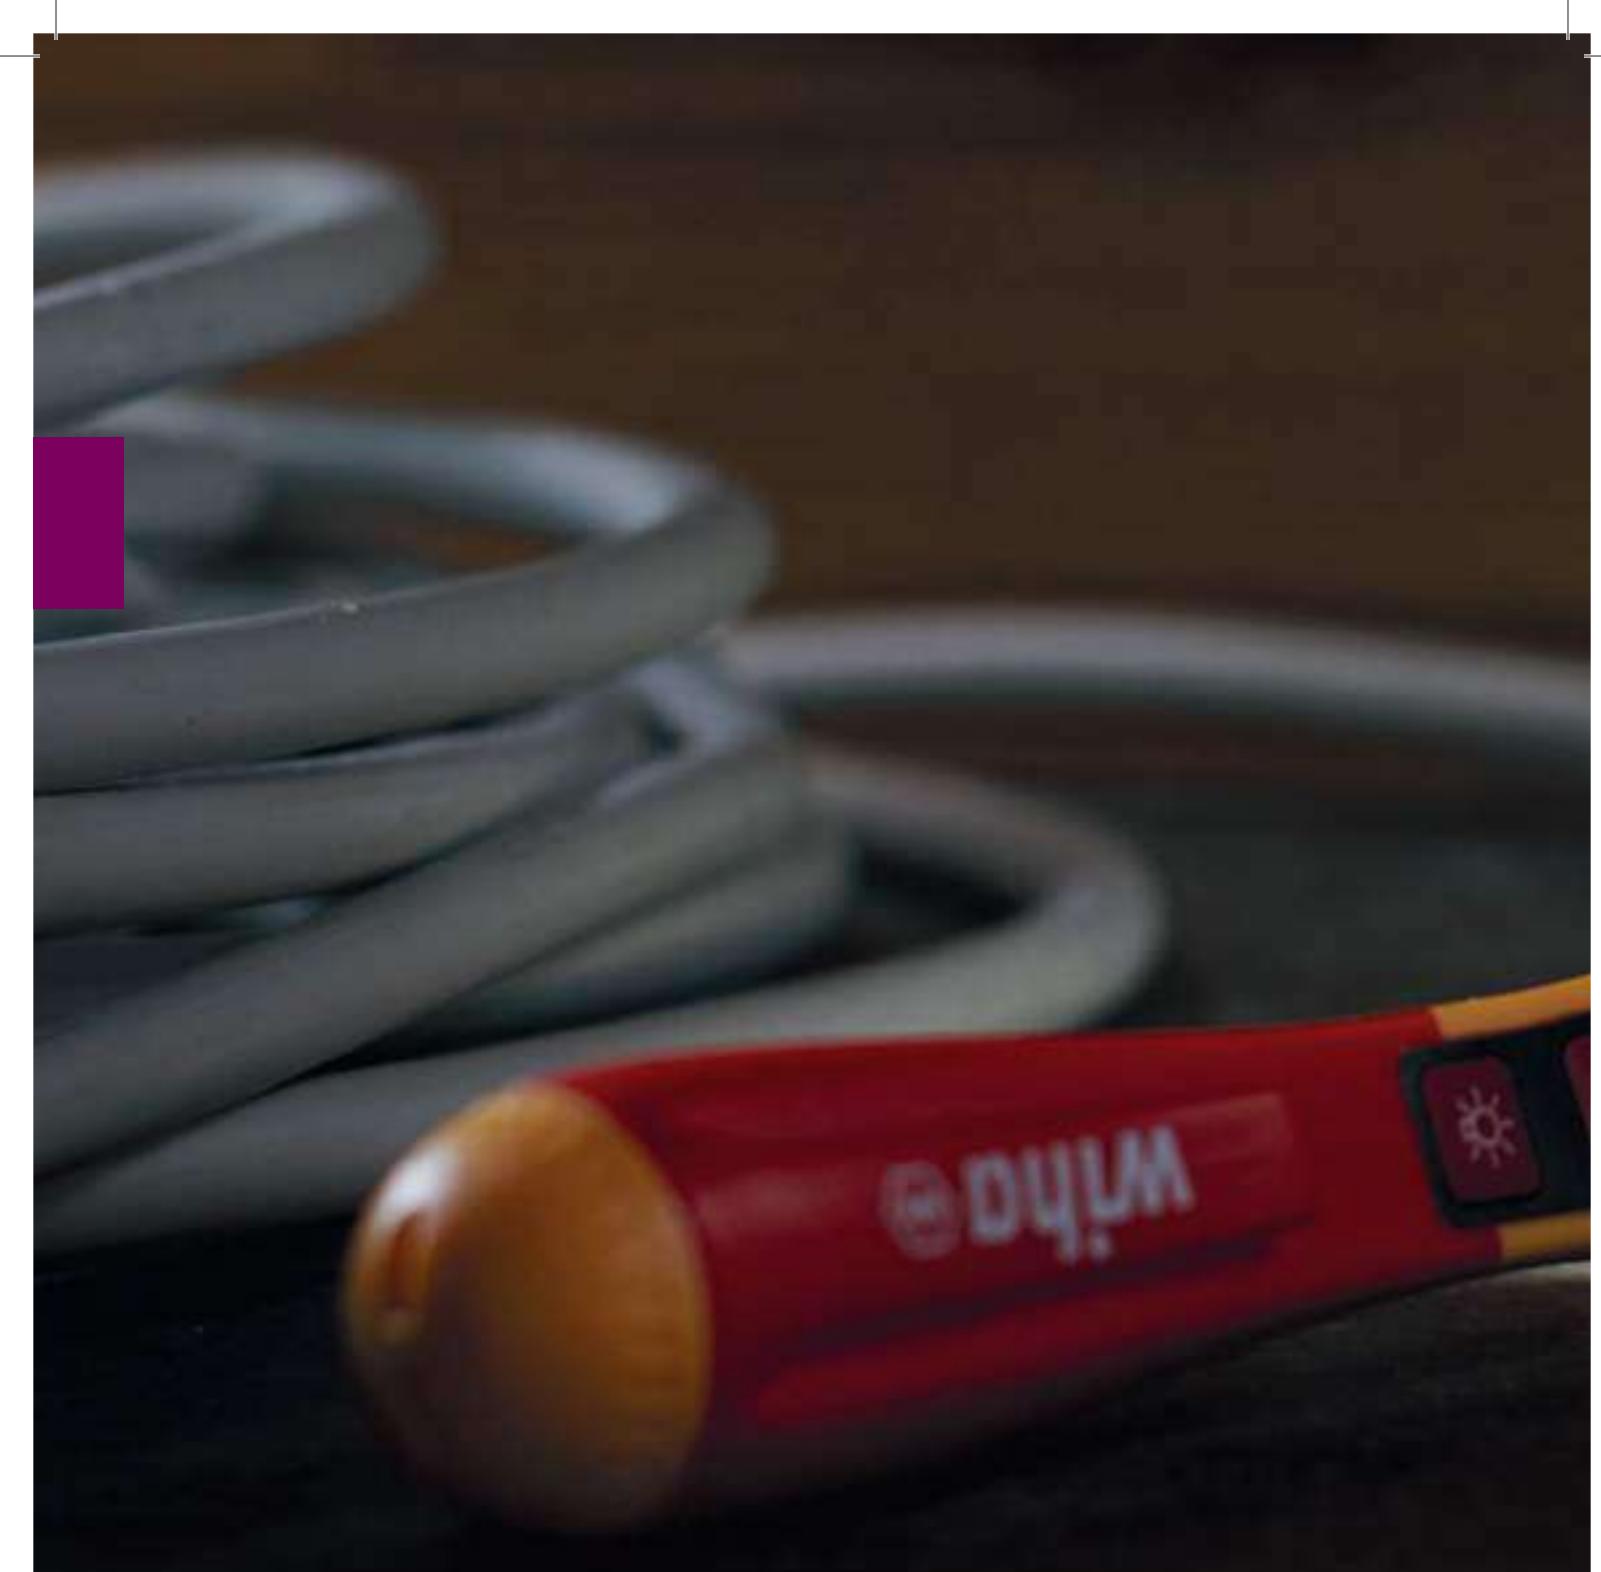

Quick, touch-free checking



Internationally adjusted measurement tip
for all sockets around the world



**Single-pole, non-contact
voltage tester volt detector,
explosion protected 12-1,000 VAC**

Order no. 44309

Page 125

**Single-pole, non-contact
volt detector, 12-1,000 V AC**

Order no. 43797

Page 125



**Screwdriver set
SoftFinish® electric
slimFix assorted 12-pcs.**

Order no. 41003


Page 131

- Ergonomic handle design recommended by physicians and therapists
- Safe, VDE-certified tools up to 1,000 V AC
- Insulated slimBits



wiha


PZ2 x 100
3241

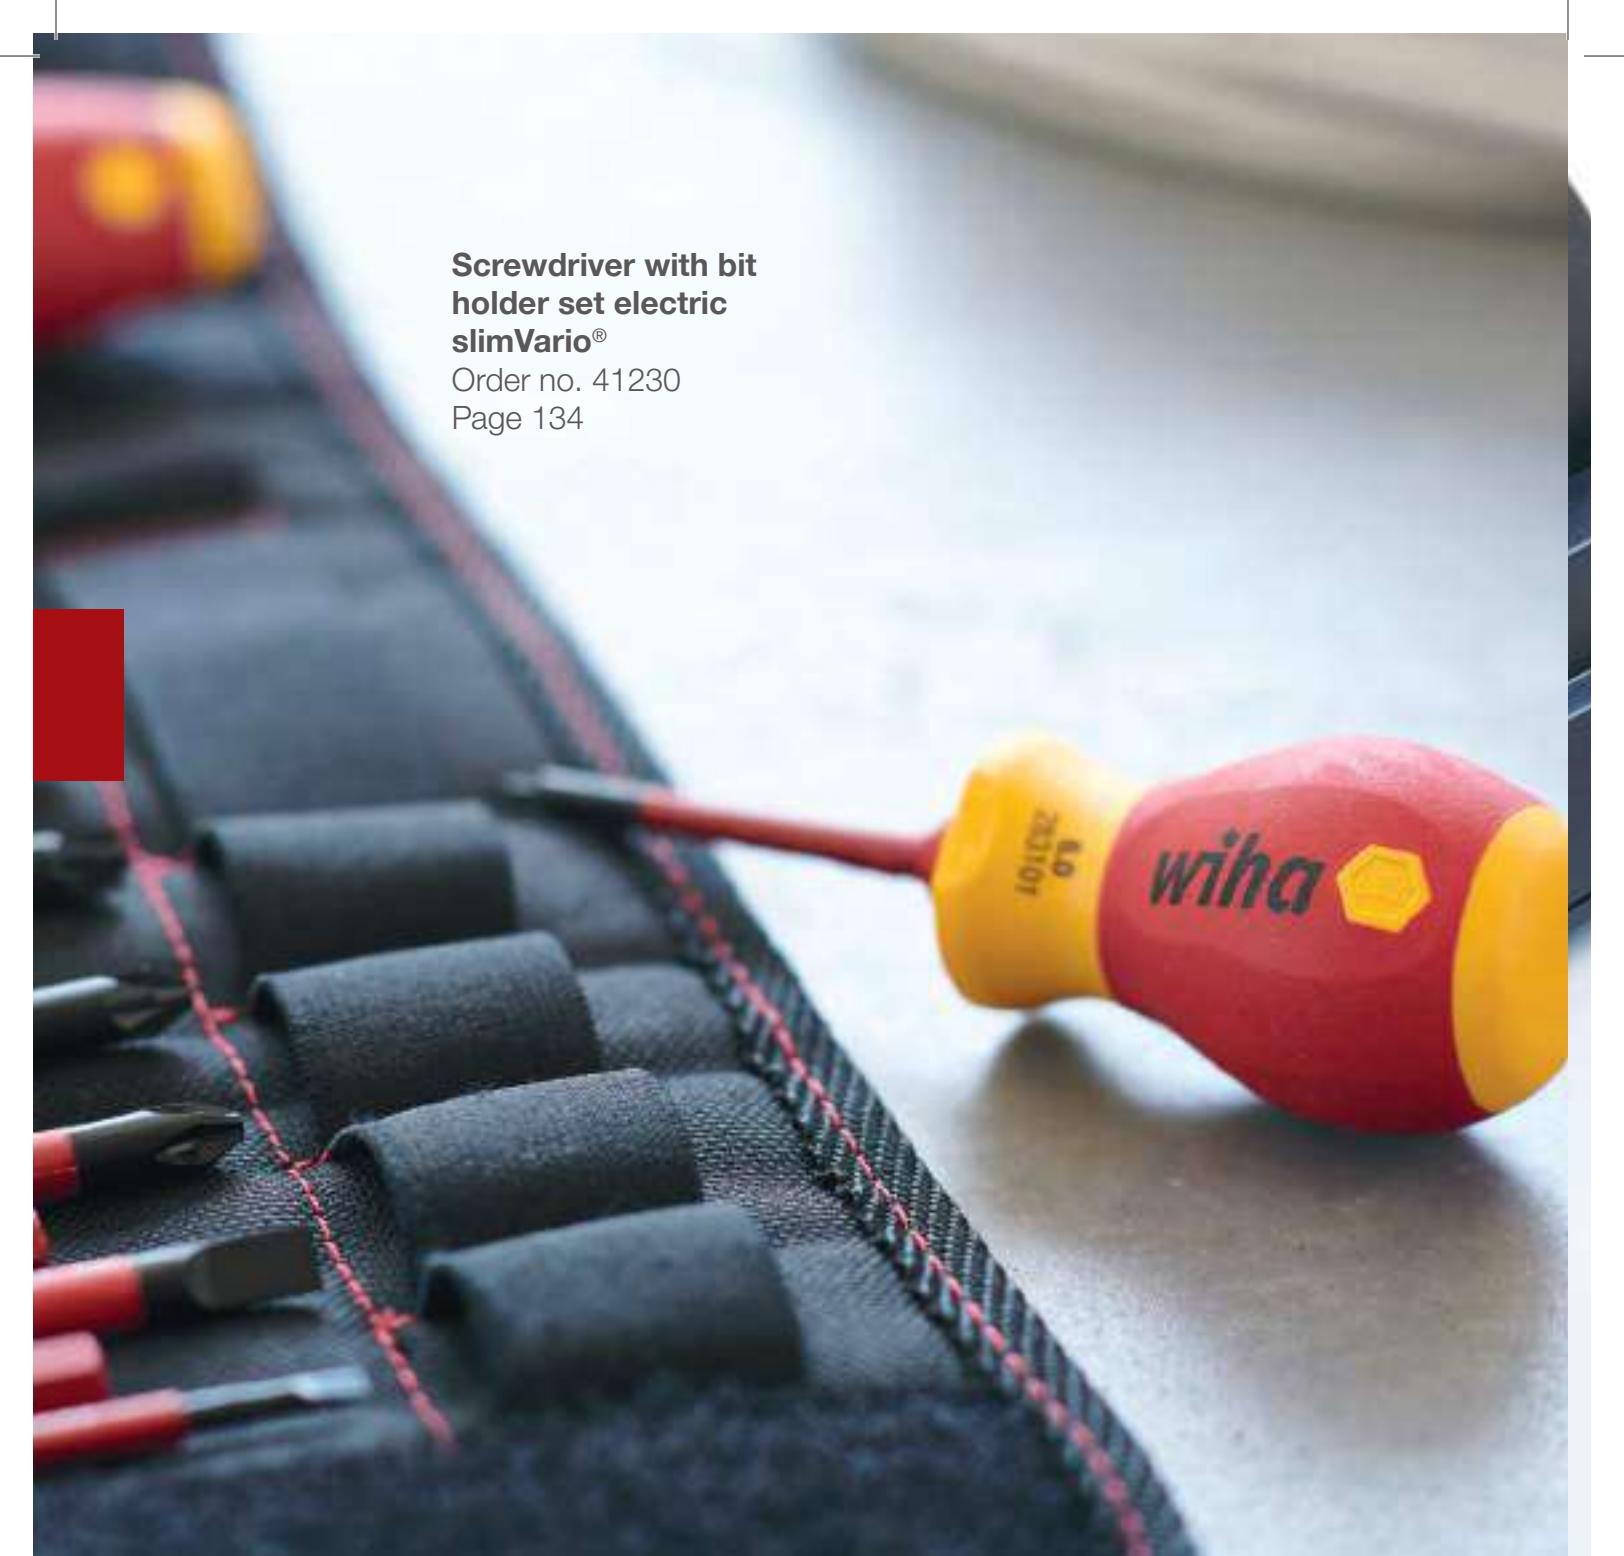

**Screwdriver with bit holder set electric
slimVario®**

Order no. 41230

Page 134

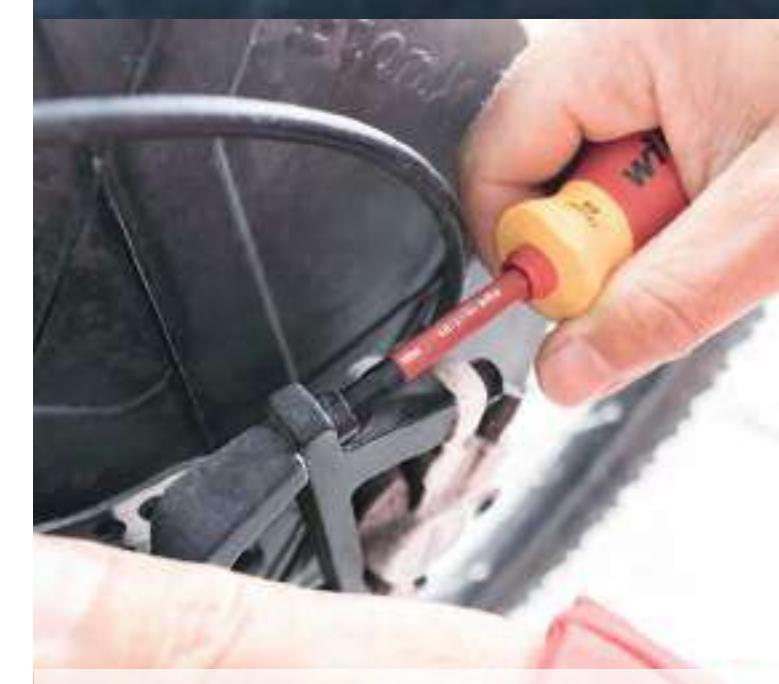

Compact handle – maximum power





**Fine screwdriver set
PicoFinish® slimVario®
electric**

Order no. 43167

Page 134



Extensive insulated replacement bit system

For sensitive and controlled power transmission

**slimBit electric bit set
TORX®, TORX PLUS®,
15-pcs. Incl. slimBit
boxes and belt holder**

Order no. 43161

Page 136





1000V
APPROVED



Safe, VDE-certified tools up to 1,000 V AC



The perfect complement!
E-screwdriver, speedE® II electric
Order no. 44318 Page 120





Screwdriver set

SoftFinish®

Order no. 41002

Page 149

- Unique Wiha handle size concept with an optimal balance of power and control
- Ergonomic handle design recommended by physicians and therapists





Screwdriver set

SoftFinish®

Order no. 21250

Page 145



With continuous striking cap



DOCTORS
RECOMMEND




Ergonomic handle design recommended
by physicians and therapists



Screwdriver set
MicroFinish®
Order no. 29138
Page 156



With continuous striking cap



Ergonomic handle design recommended
by physicians and therapists.



Screwdriver set
SoftFinish® ESD
Order no. 27252
Page 157




Electrostatic discharging



Ergonomic handle design recommended by physicians and therapists

Fine screwdriver set
PicoFinish® ESD
Slotted, Phillips,
7 pcs. incl. holder
Order no. 43707
Page 158

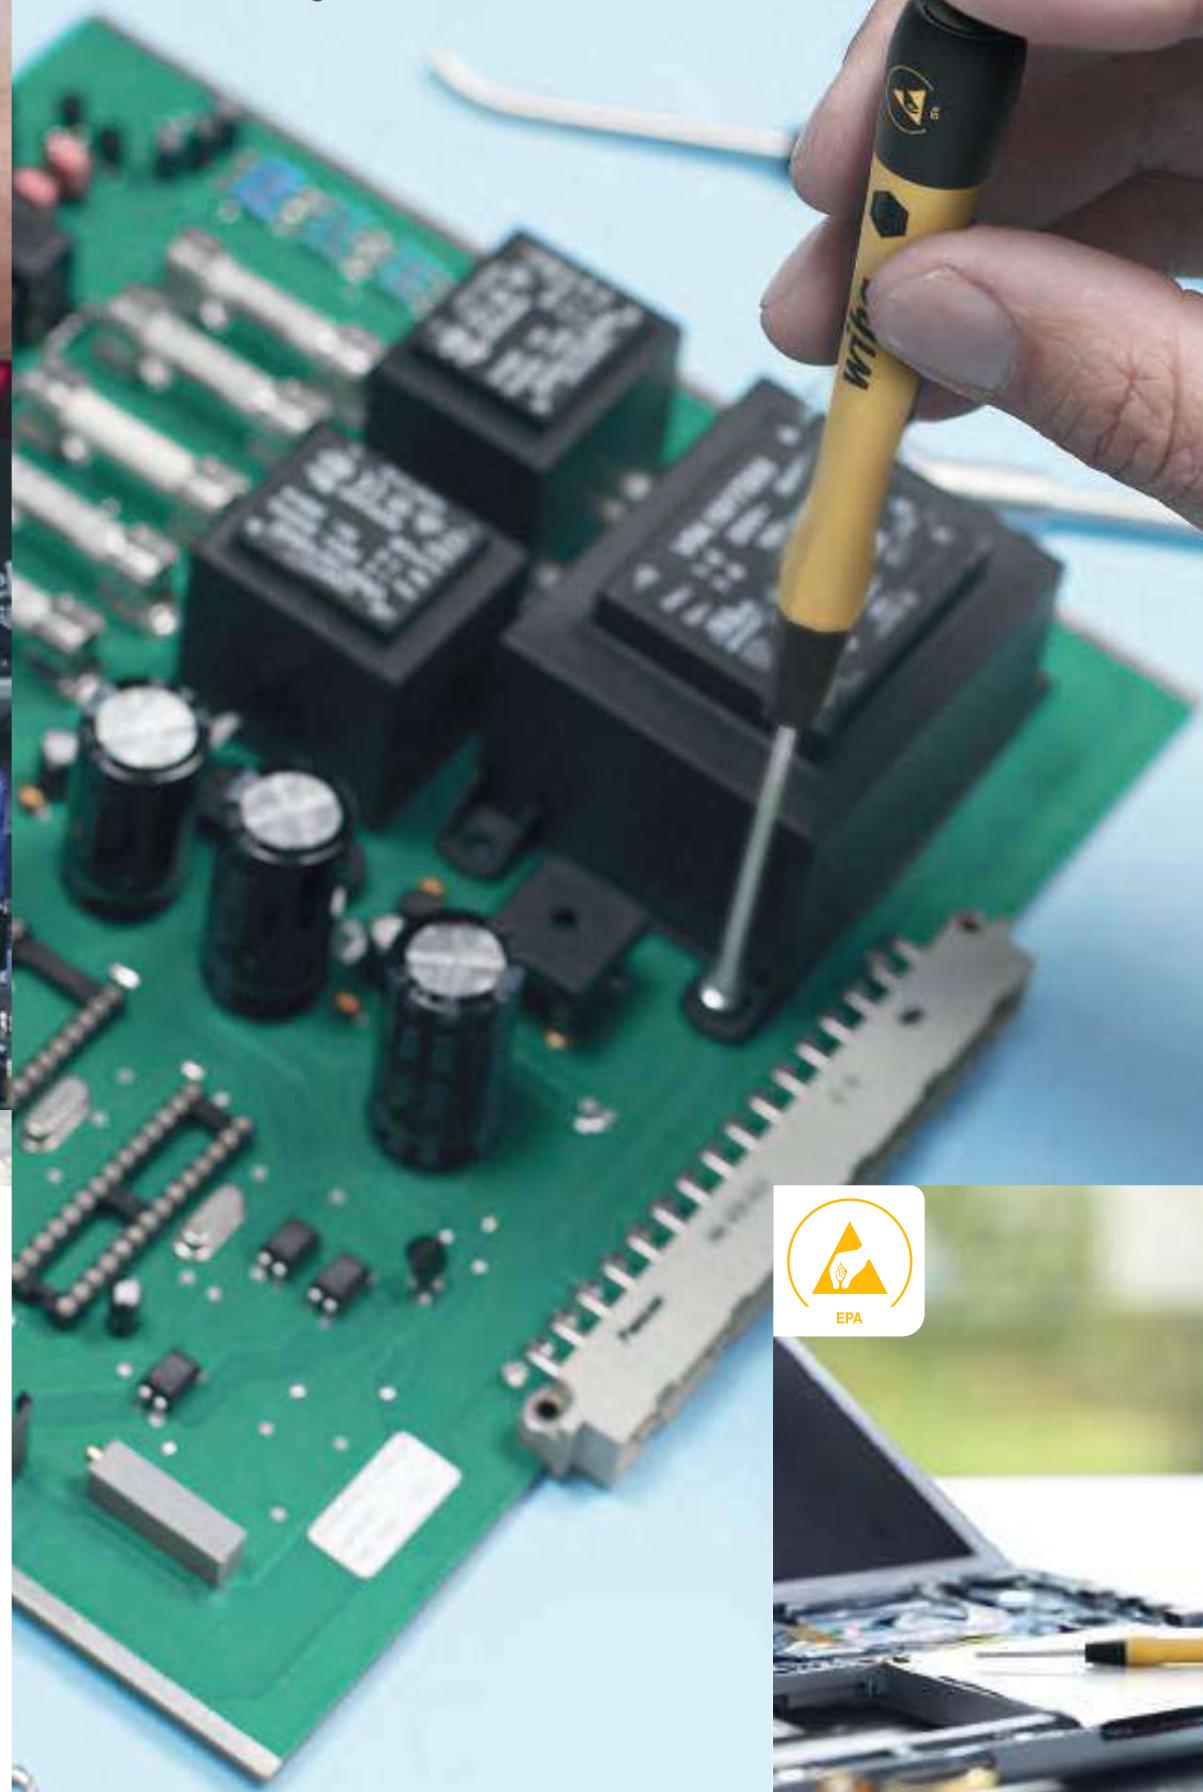

Electrostatic discharging




Torque screwdriver set

TorqueVario®-S electric

Order no. 36791

Page 164

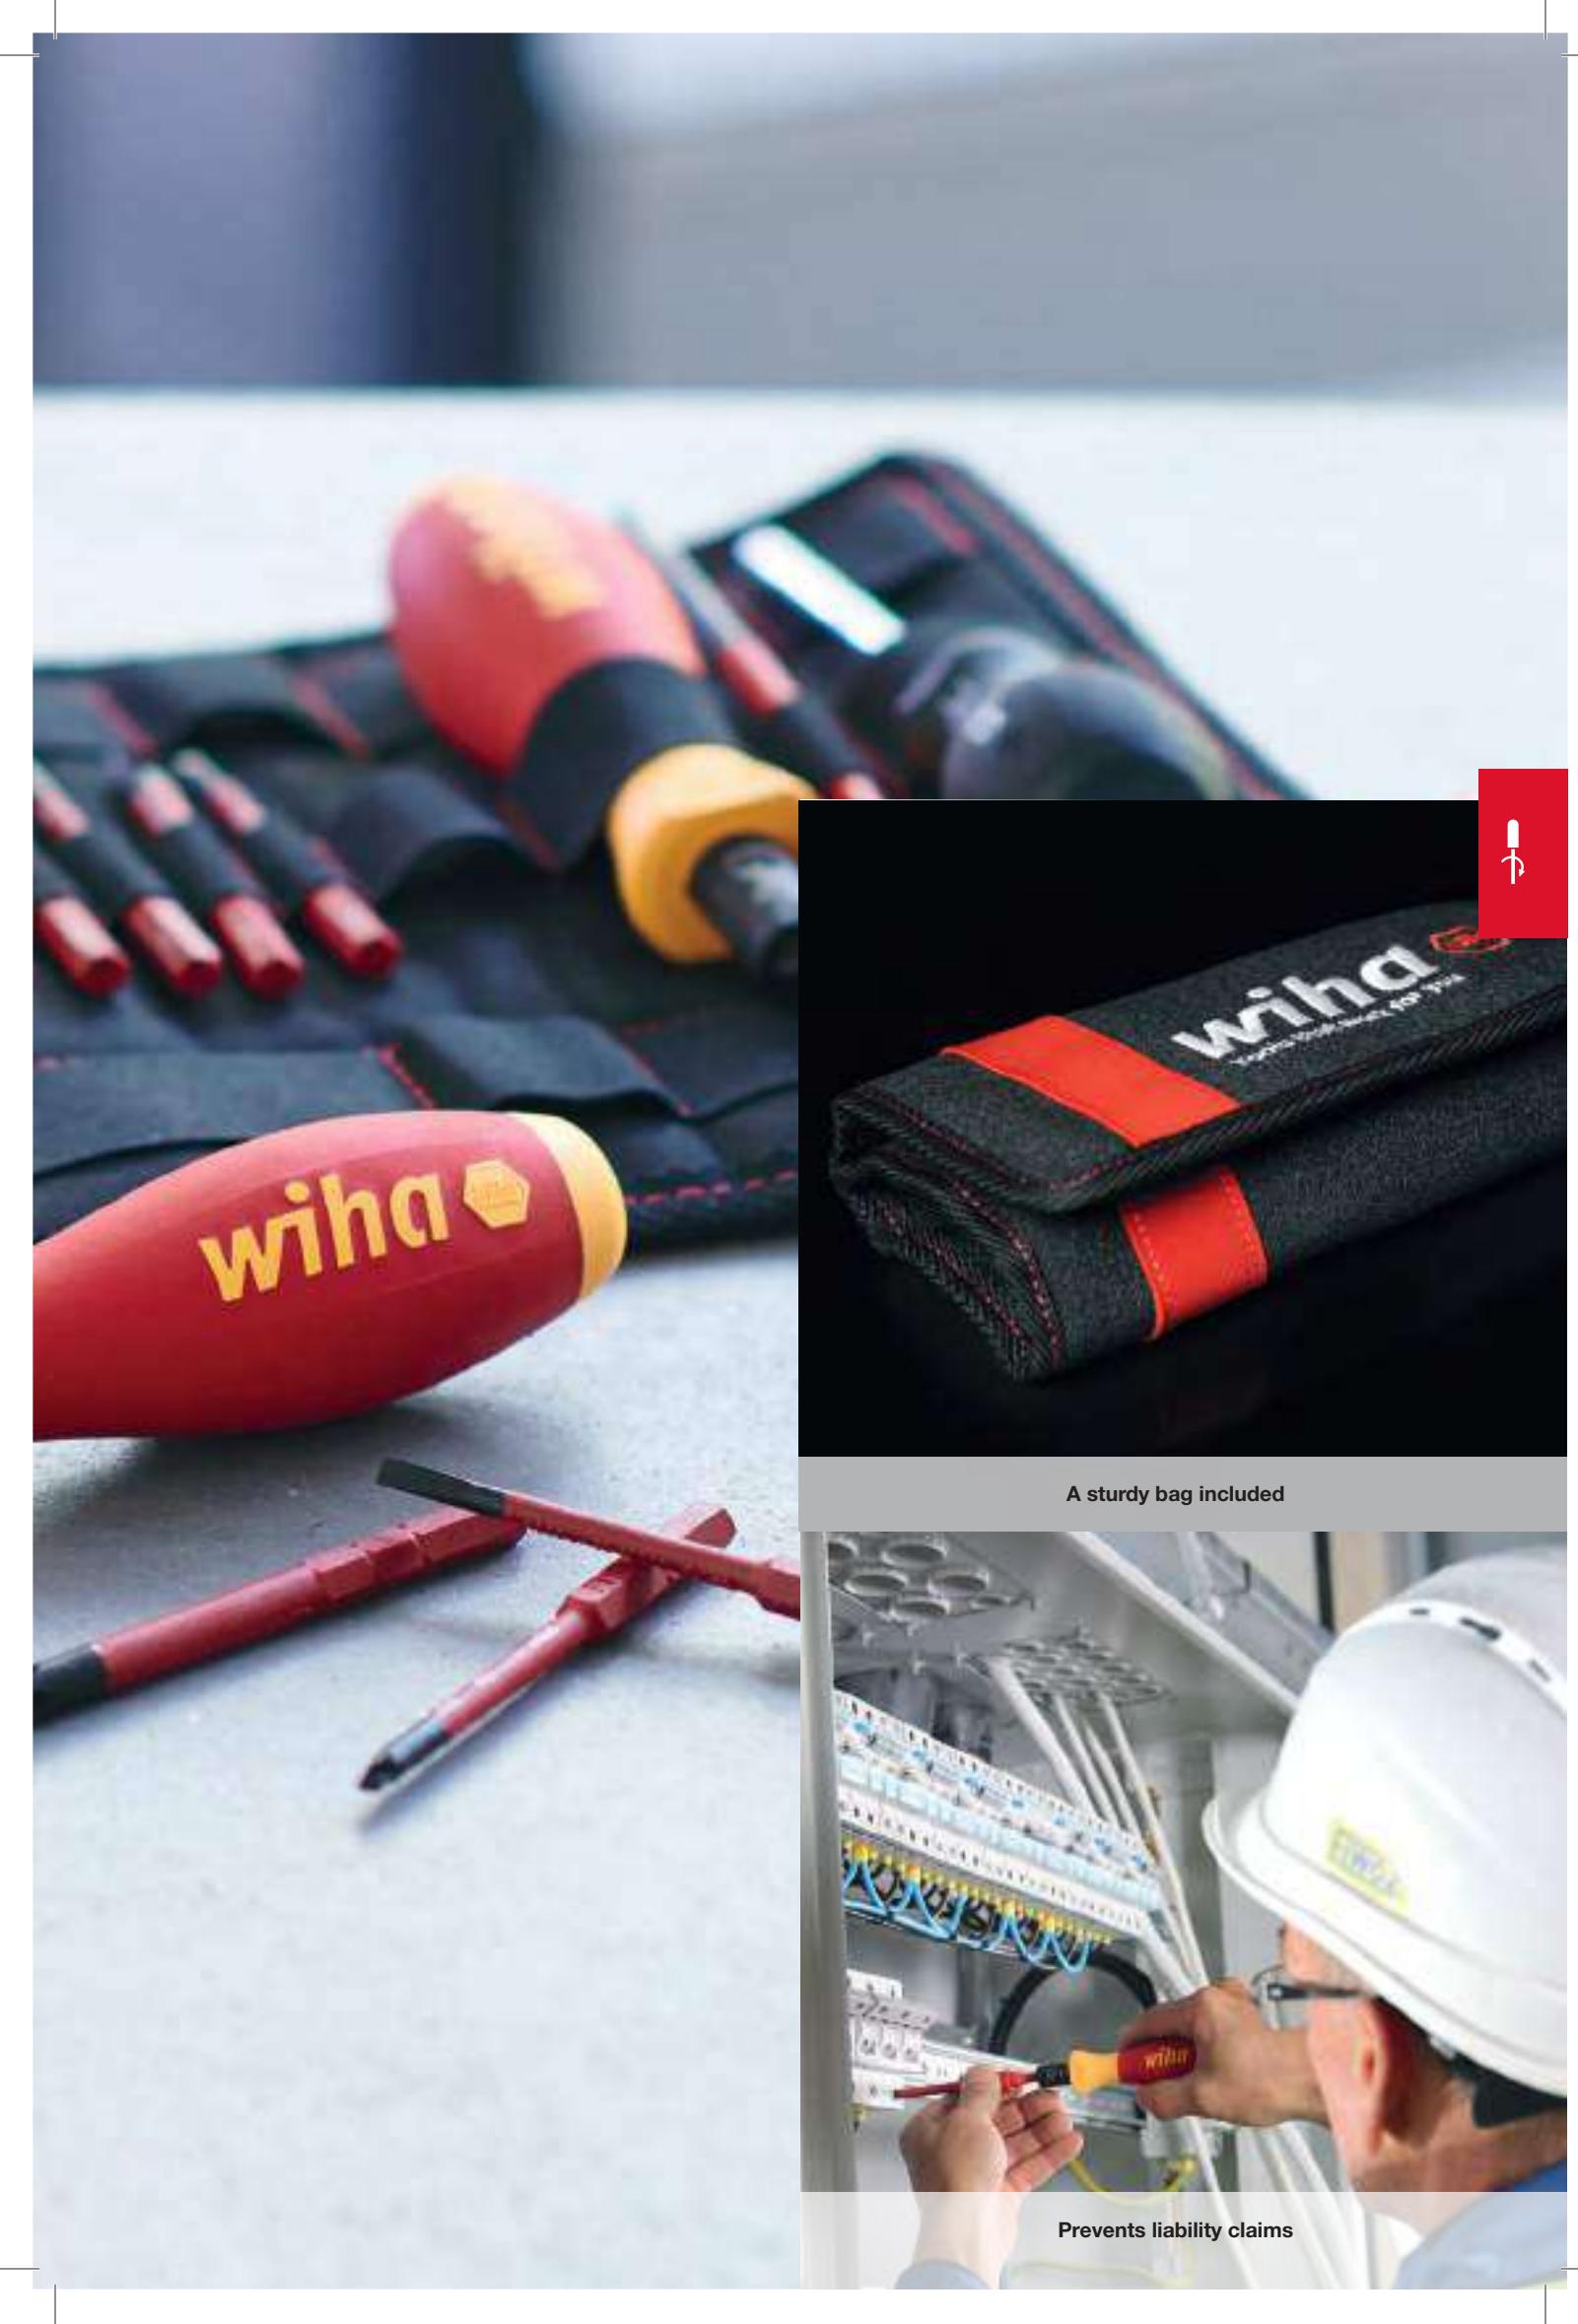

wiha

A sturdy bag included

Prevents liability claims

Torque screwdriver
with T-handle
TorqueVario®-S T electric
Order no. 43177
Page 171



Variably adjustable torque



Prevents material damage and follow-up work.



Lateral handle for high power transfer



Prevents liability claims



Protects material from damage and ensures no additional follow-up work



The perfect complement!

L-key set in ErgoStar holder
Order no. 37351 Page 207





Torque screwdriver
iTorque®



Order no. 36888

Page 172



Torque screwdriver set

TorqueVario®-S

Order no. 26893


Page 173



Variably adjustable torque



A sturdy metal box included

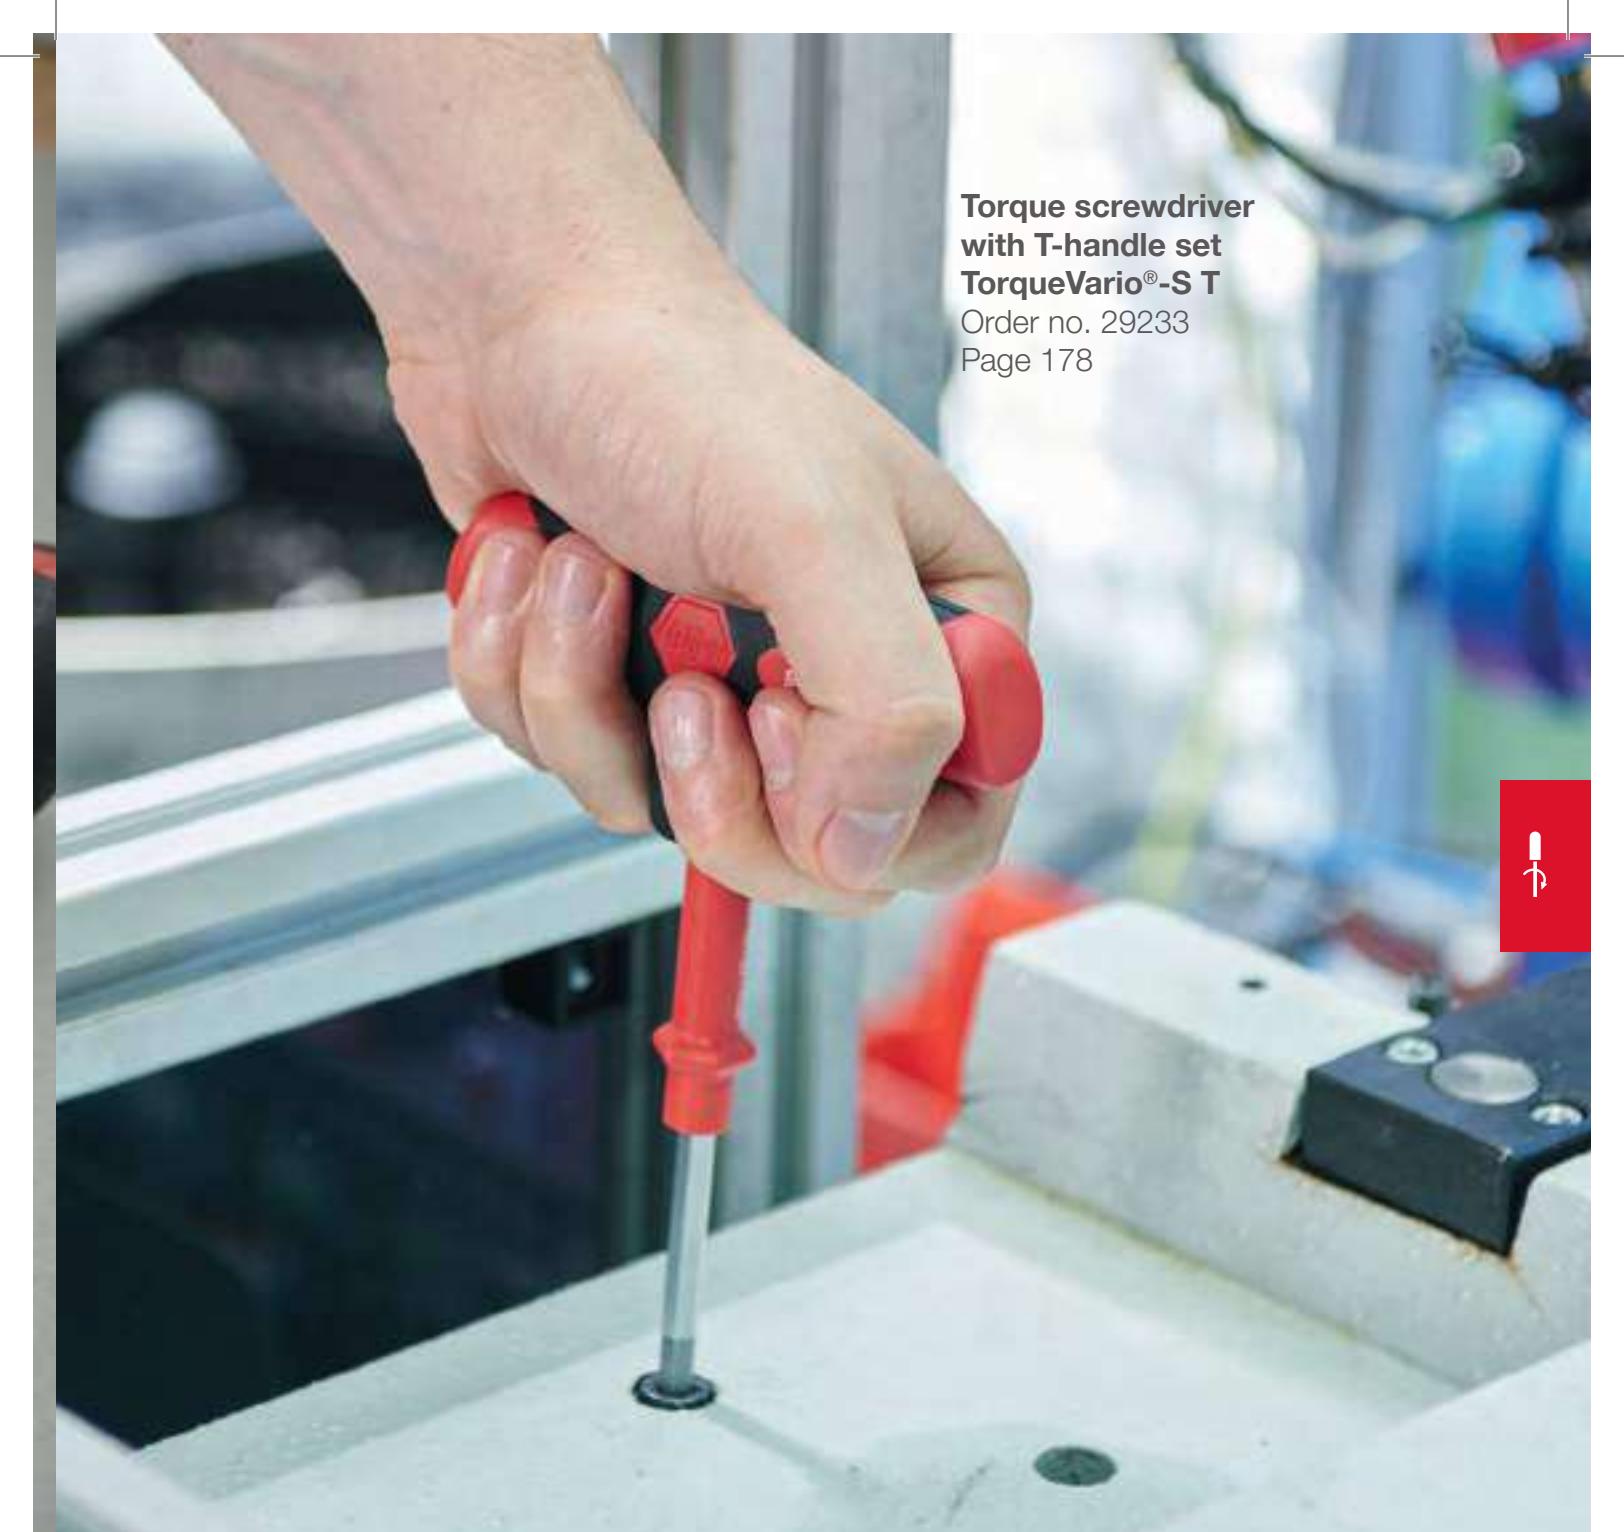

Torque screwdriver
with T-handle set
TorqueVario®-S T
Order no. 29233
Page 178



A sturdy metal box included



Variably adjustable torque

Torque screwdriver set TorqueVario®-S
ESD 0,4-1,0 Nm assorted, variably
adjustable torque limit, 14-pcs. incl. box
Order no. 43898
Page 181





**Screwdriver with bit
magazine LiftUp electric**
Order no. 38610
Page 186





- 6 tools in one
- All bits securely stored
- Safe, VDE-certified tools up to 1,000 V AC
- Insulated slimBits

**Screwdriver with
bit magazine LiftUp
26one®**
Order no. 43895
Page 187



Large handle – maximum power



26 tools in one



Should be present in every household



Screwdriver with bit magazine magnetic

Order no. 33736


Page 189



Perfect for tight fits



6 tools in one! Integrated bit magazine in the handle

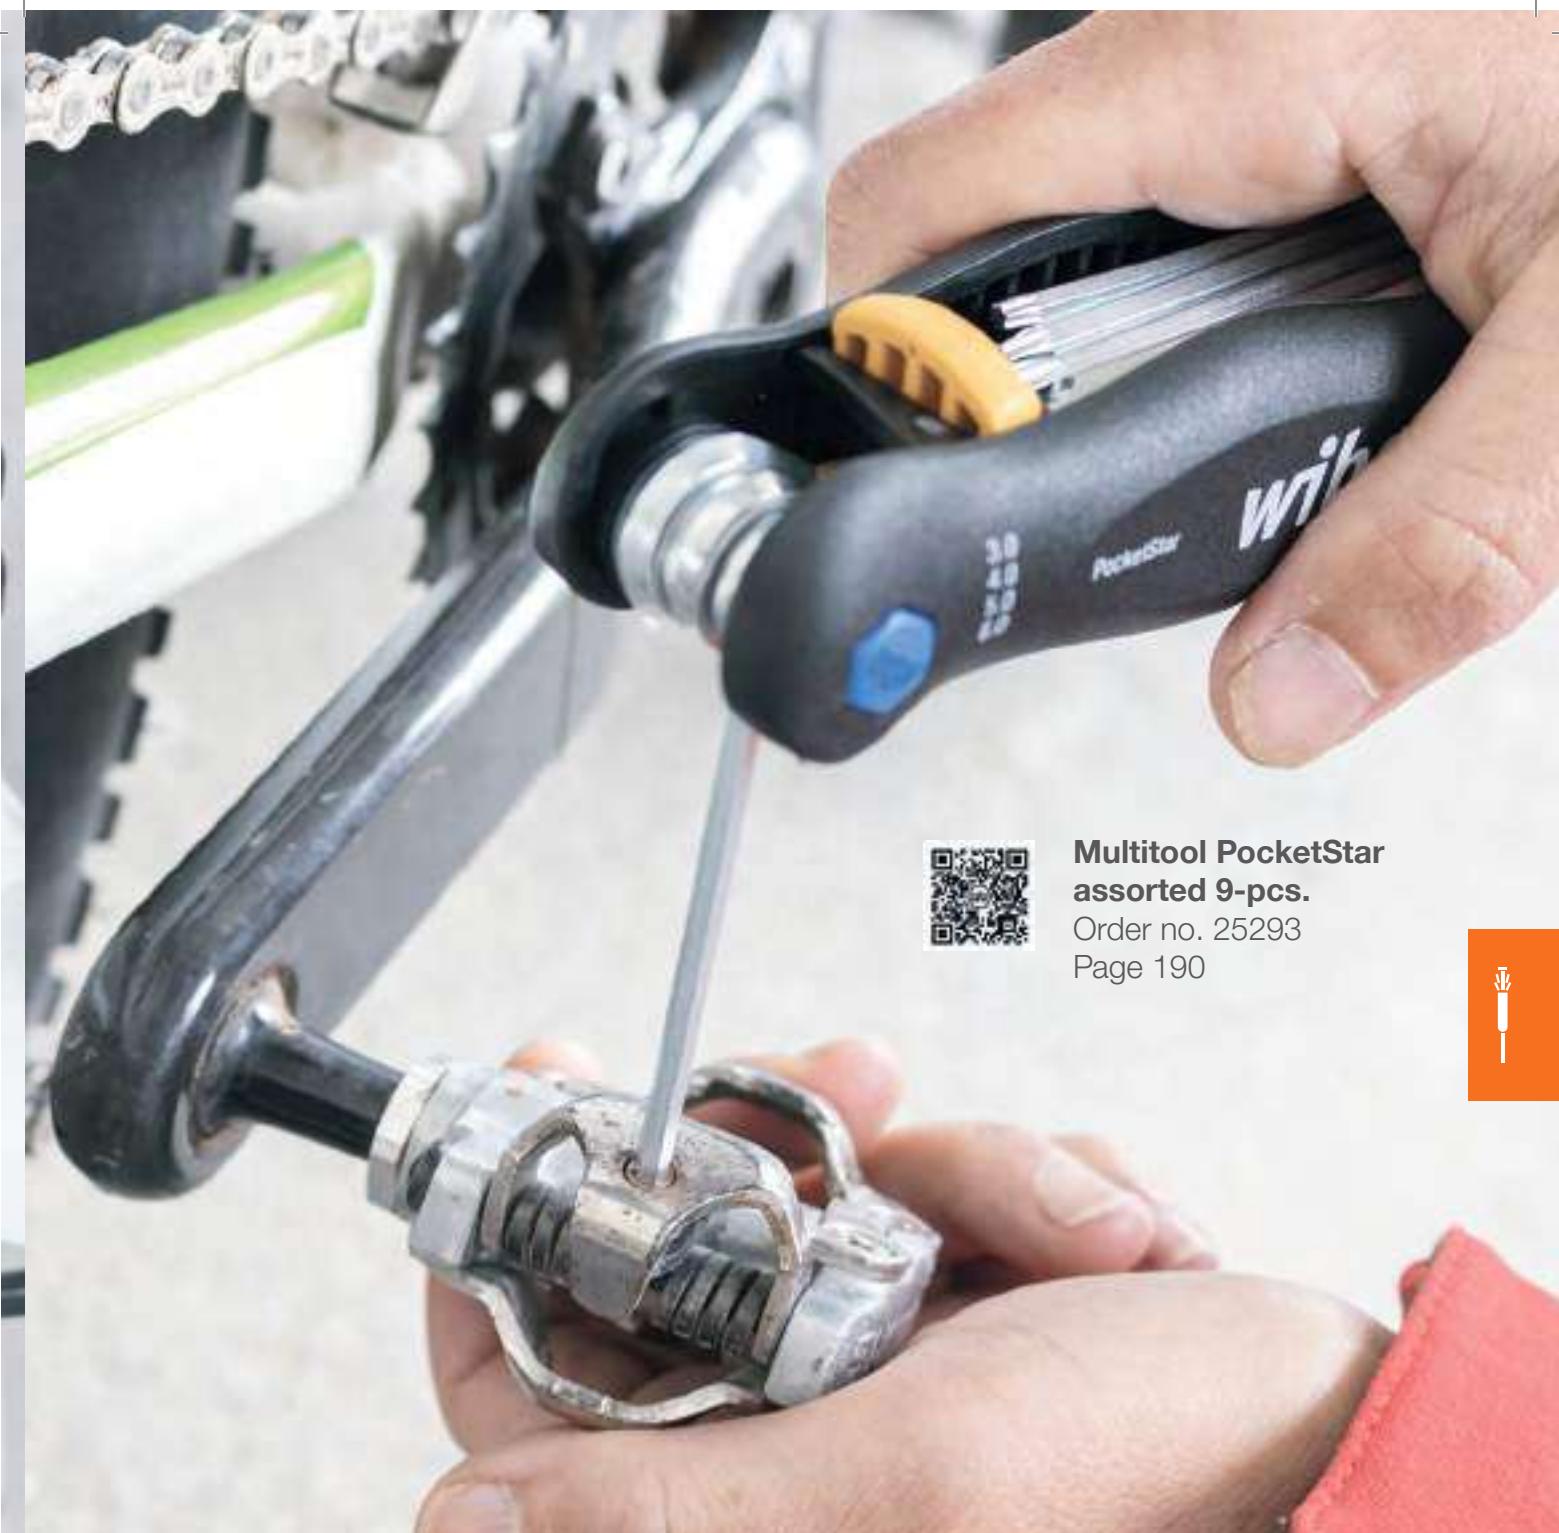


Multitool PocketStar
assorted 9-pcs.
Order no. 25293
Page 190



Can be used as a horizontal or longitudinal handle



Includes all standard drives!

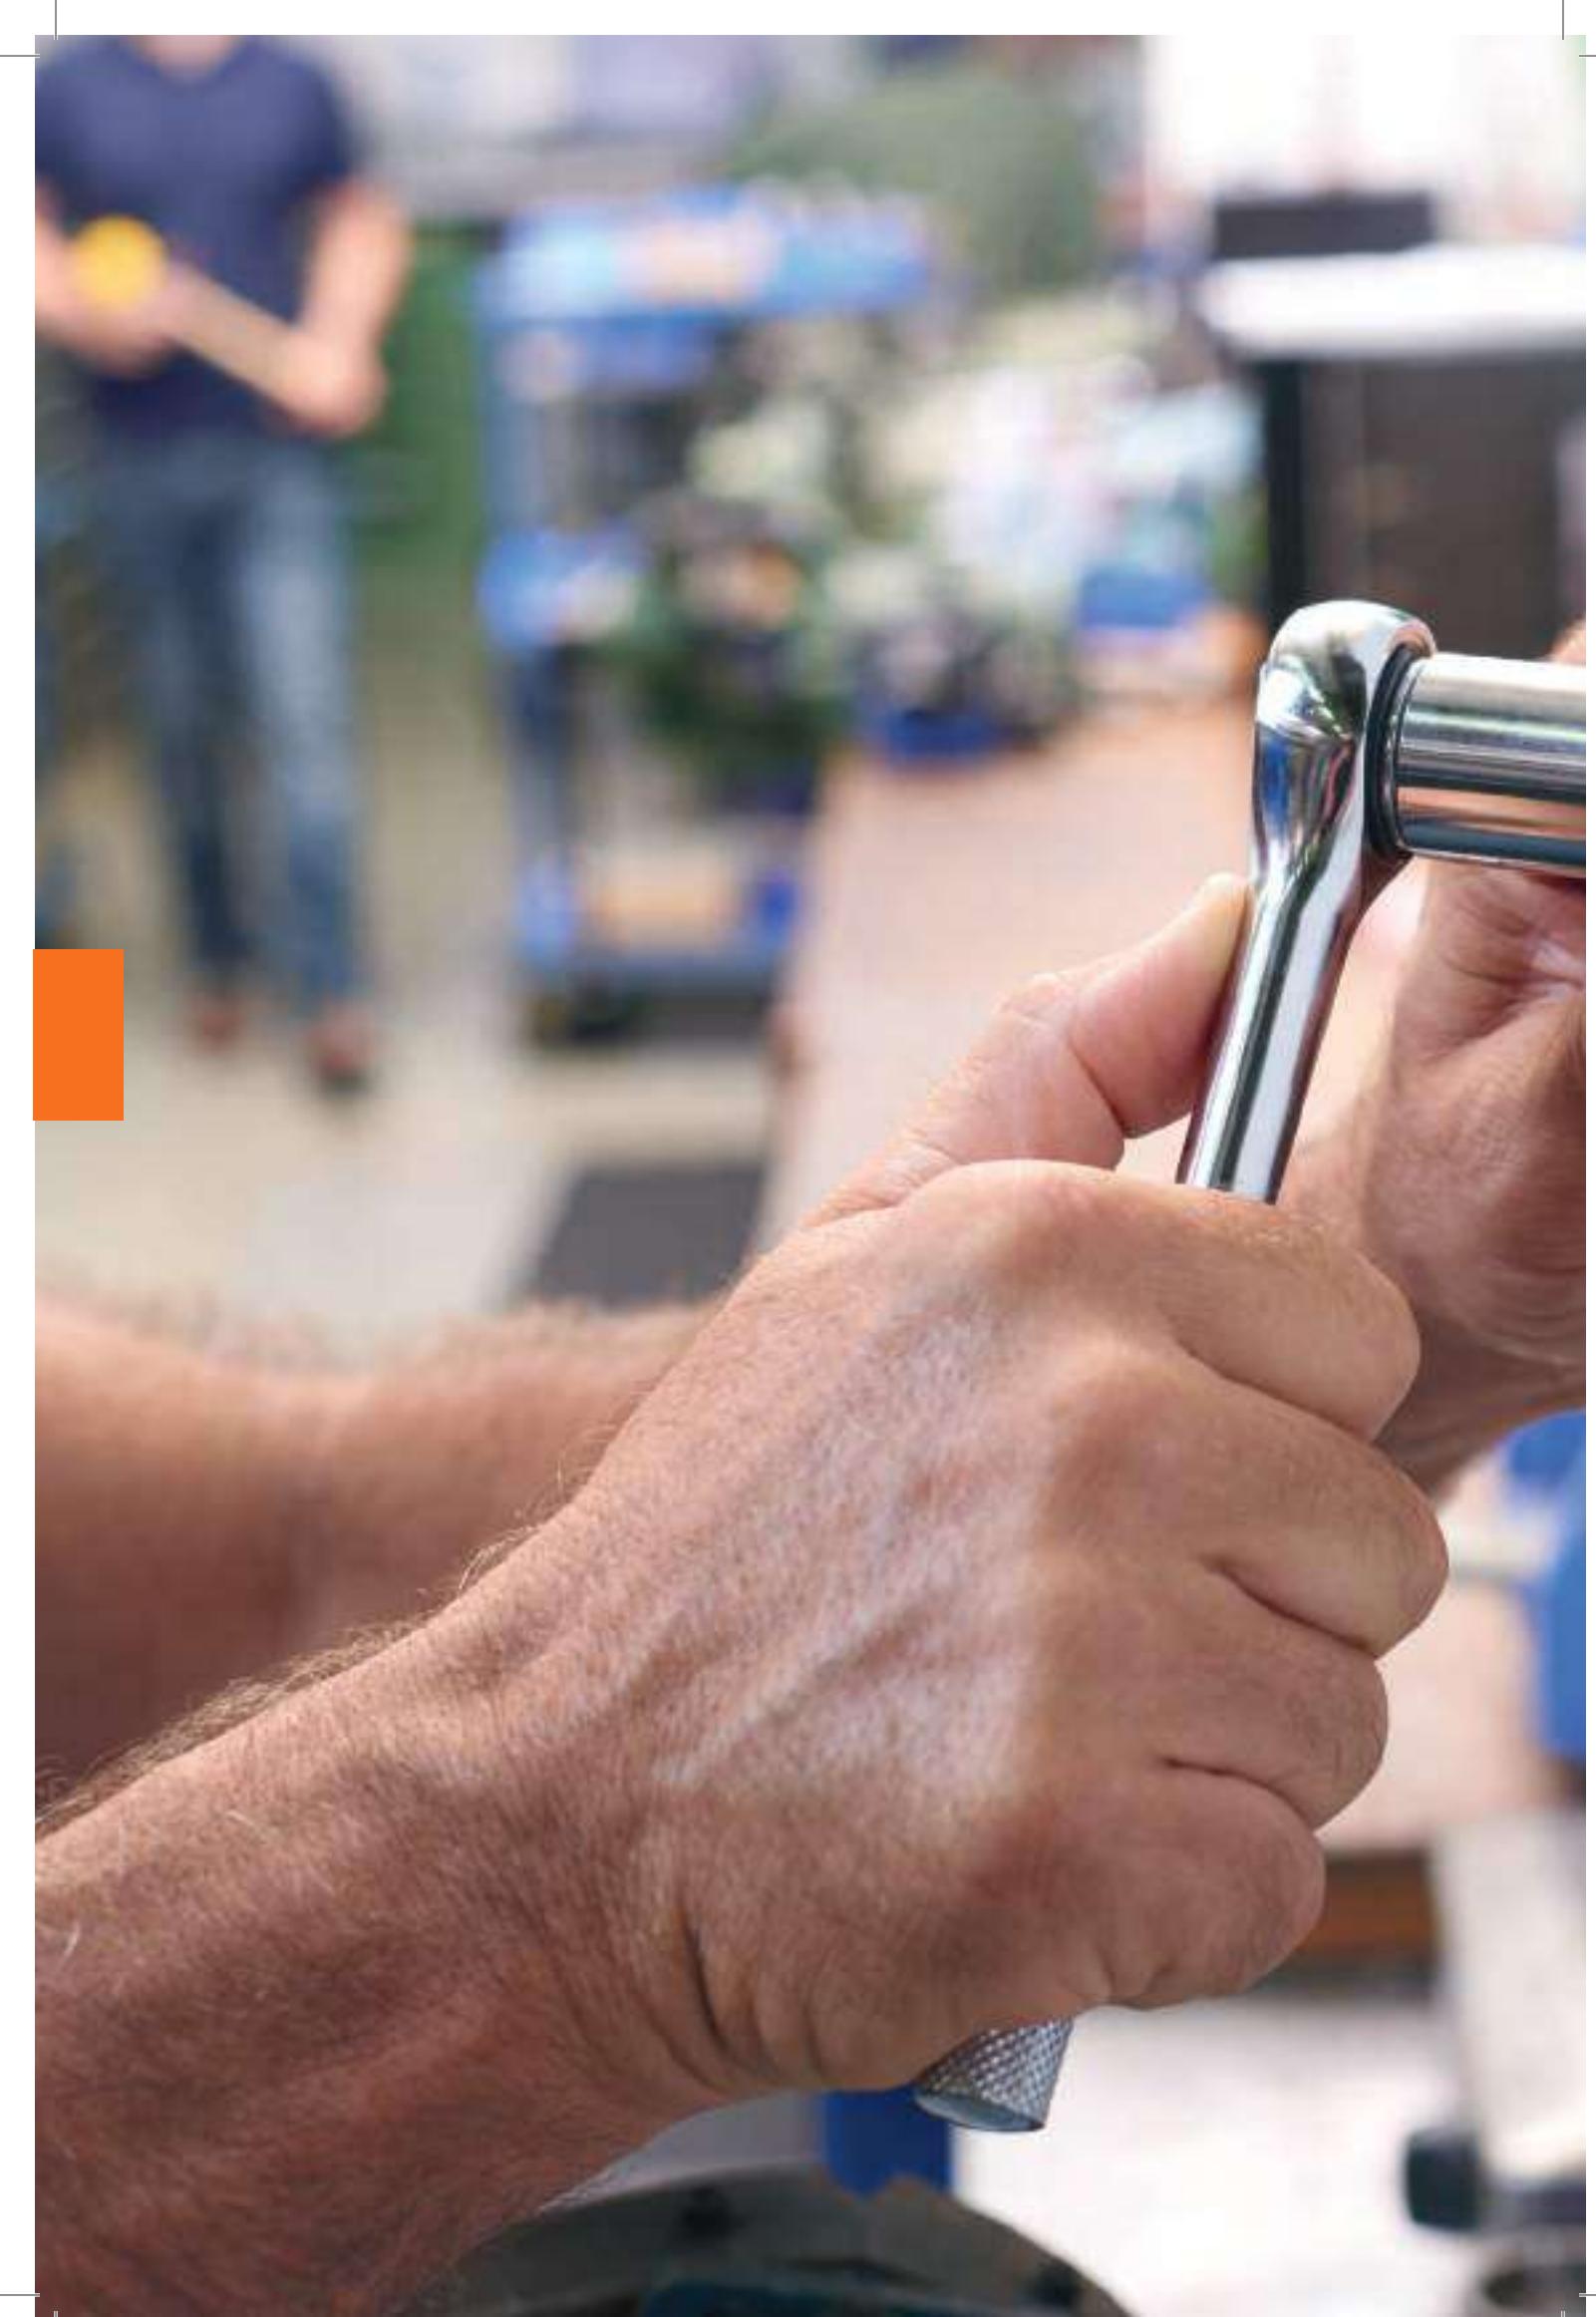




**Nut driver insert
gripper**
Order no. 20554
Page 194



Grips various profiles and contours



The perfect complement!
Pliers set Professional
Order no. 26854 Page 289

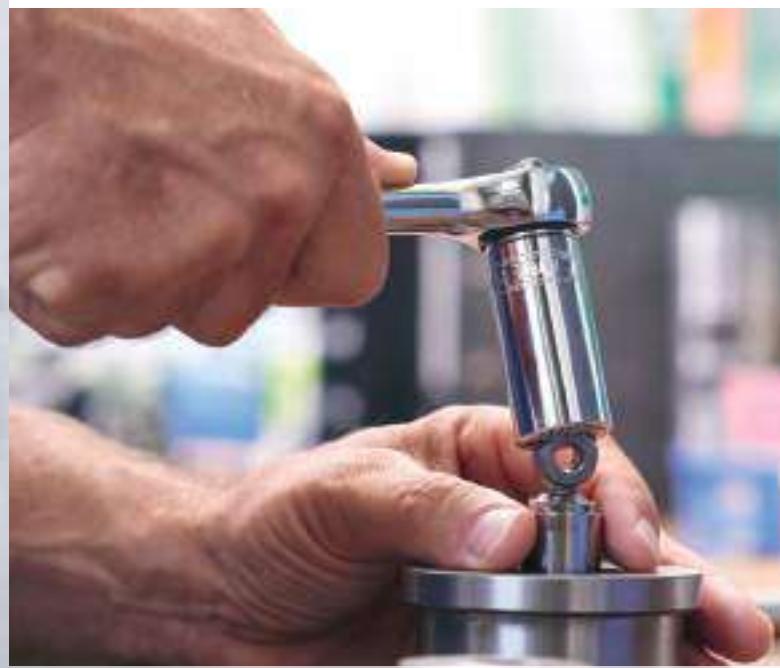


Problem solver



Screwdriver with
interchangeable blade
set SYSTEM 6 assorted
12-pcs. incl. roll-up bag
Order no. 03591
Page 195



**SCALABLE
BLADE**

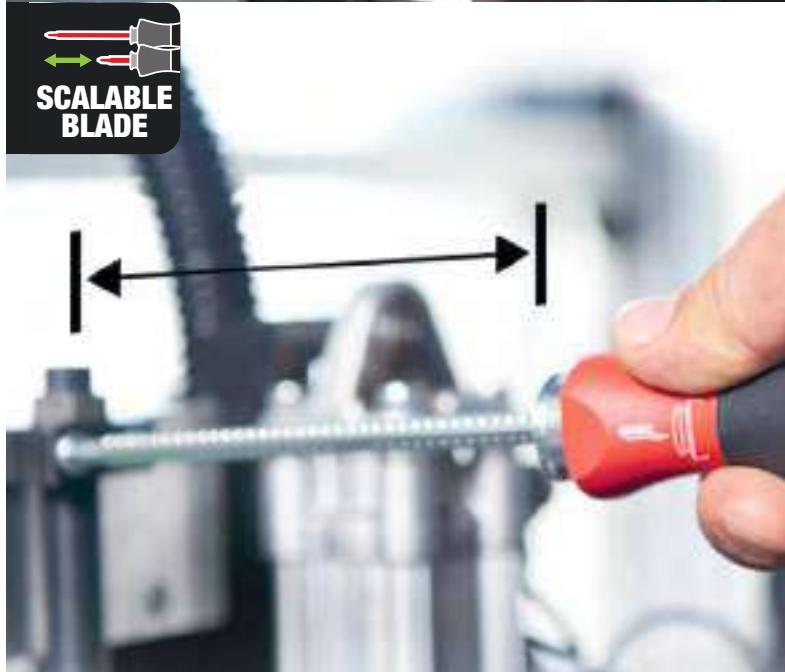

Variably adjustable blade length



Extensive, exchangeable blade range

**Screwdriver with
interchangeable blade
set SYSTEM 4 ESD
assorted 12-pcs
incl. roll-up bag**
Order no. 31499
Page 202



Variably adjustable blade length

Extensive, exchangeable blade range

- 25° ball end
- Always neatly stored away
- Easy to find – thanks to UV fluorescent coating
- Holds hex screws without a magnet




**L-key set in ErgoStar
holder**

Order no. 43850

Page 206

F

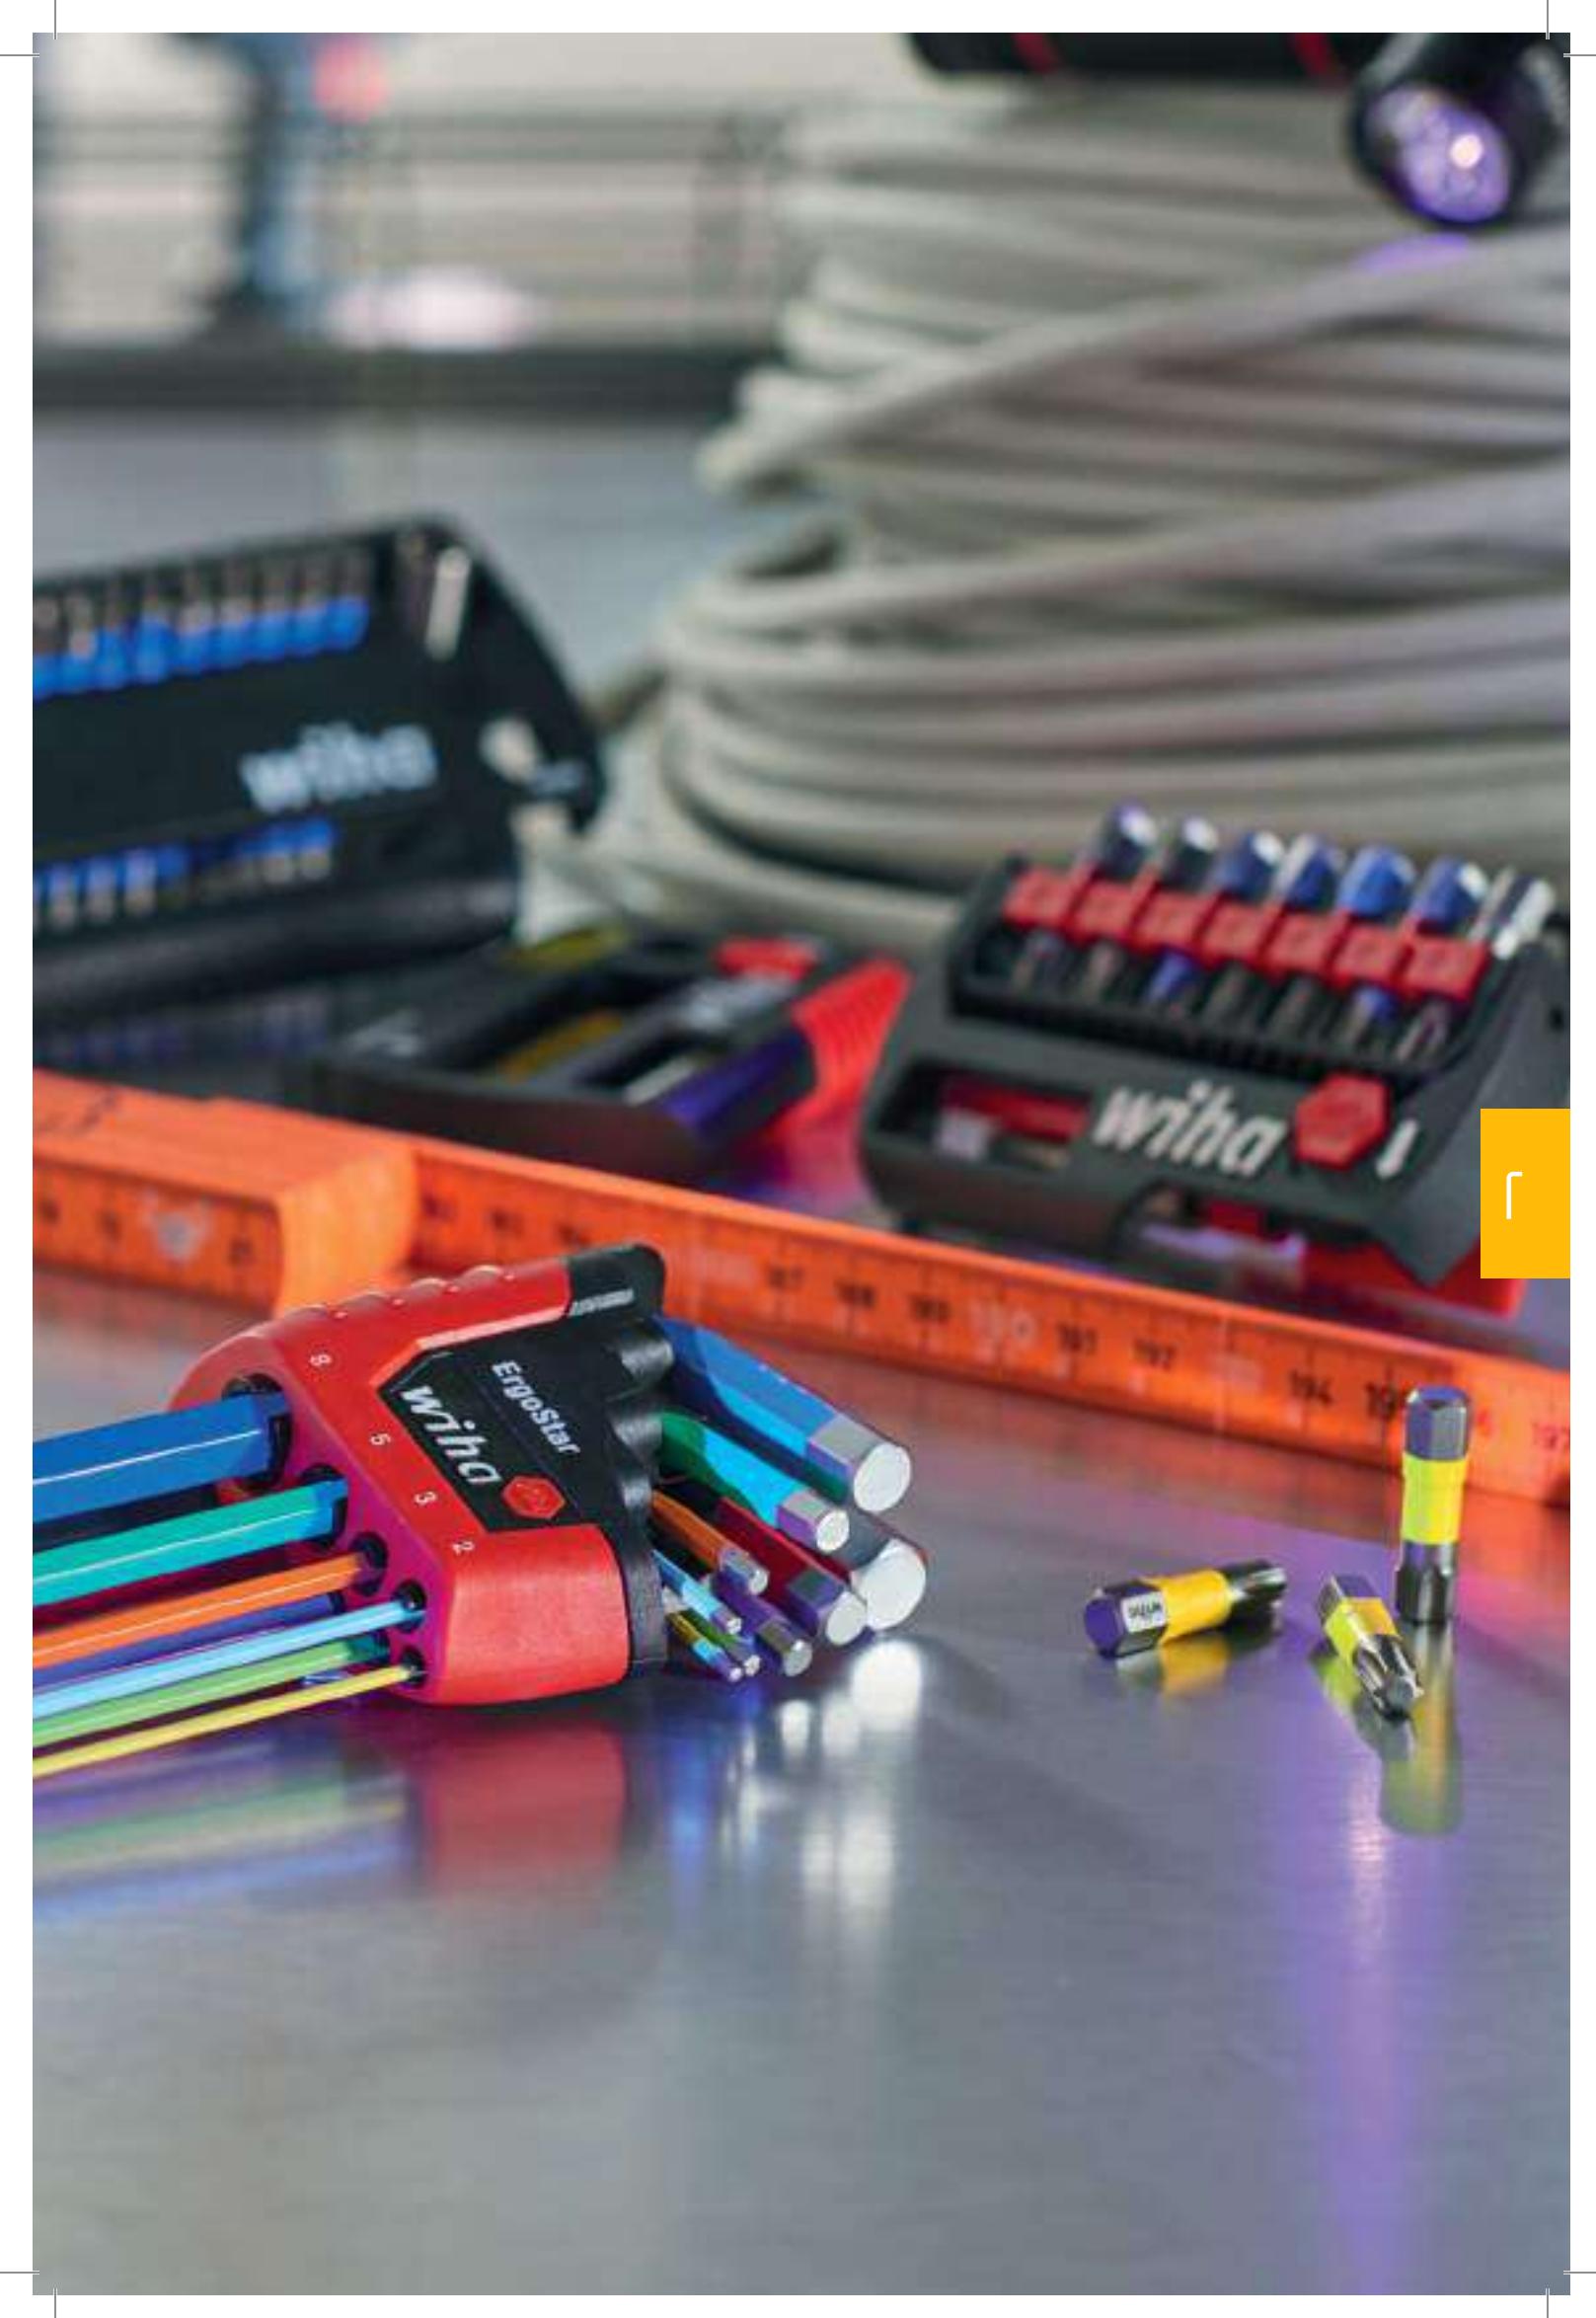

**L-key set in
ErgoStar holder**
Order no. 43851
Page 207

**L-key set in ErgoStar
holder TORX®
MagicSpring®,
14-pcs. in blister pack,
black oxidised**
Order no. 43848
Page 211

- 25° ball end
- Always neatly stored away
- Holds hex screws without a magnet
- Chrome-plated surface prevents rust






L-key set in ProStar

holder

Best.-Nr 35481

Page 208

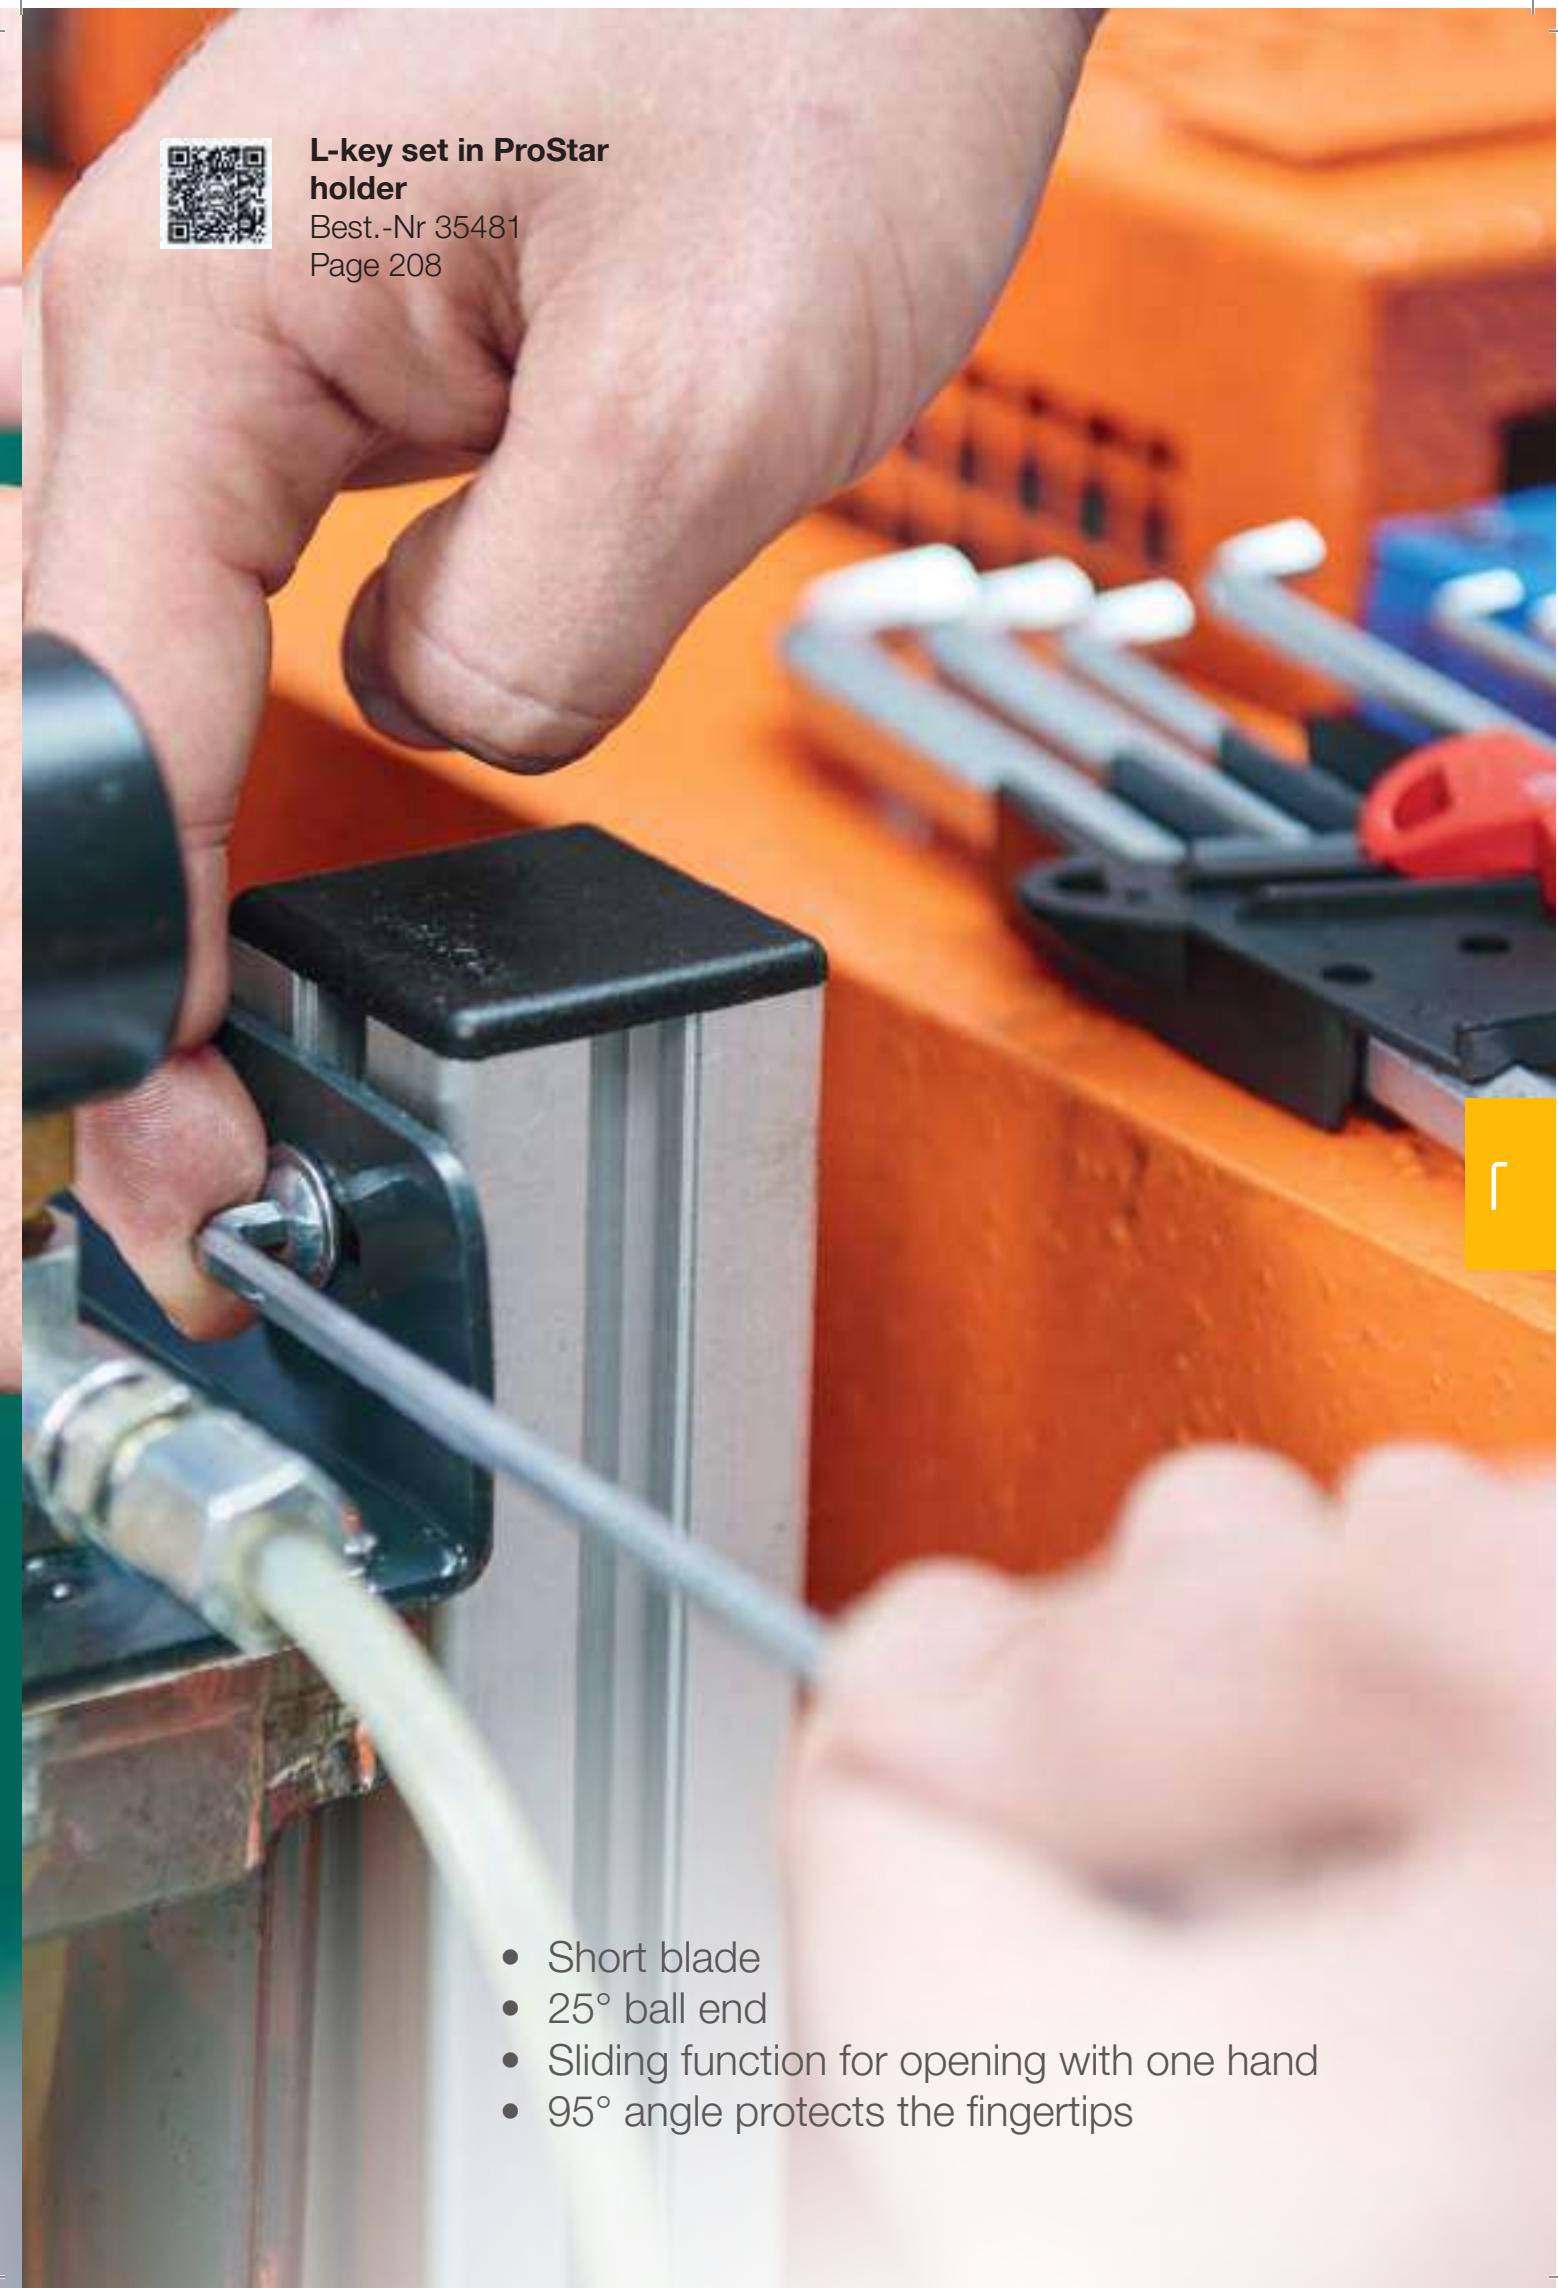

- Short blade
- 25° ball end
- Sliding function for opening with one hand
- 95° angle protects the fingertips

**L-key with T-handle
set ComfortGrip**
**Hexagon with side drive,
matt chrome-plated 6-pcs.**
Order no. 26247
Page 216

**L-key with T-handle
set ComfortGrip**
**TORX® with side drive,
matt chrome-plated 6-pcs.**
Order no. 26248
Page 216



F




- Lateral handle for high power transfer
- With integrated lateral drive
- Chrome-plated surface prevents rust



**BitBuddy® TY bit set,
29 mm TORX®
9-pcs. 1/4" C6,3**
Order no. 42136
Page 234

**BitBuddy® TY bit set,
49 mm TORX®
8-pcs. 1/4" E6,3**
Order no. 42115
Page 232



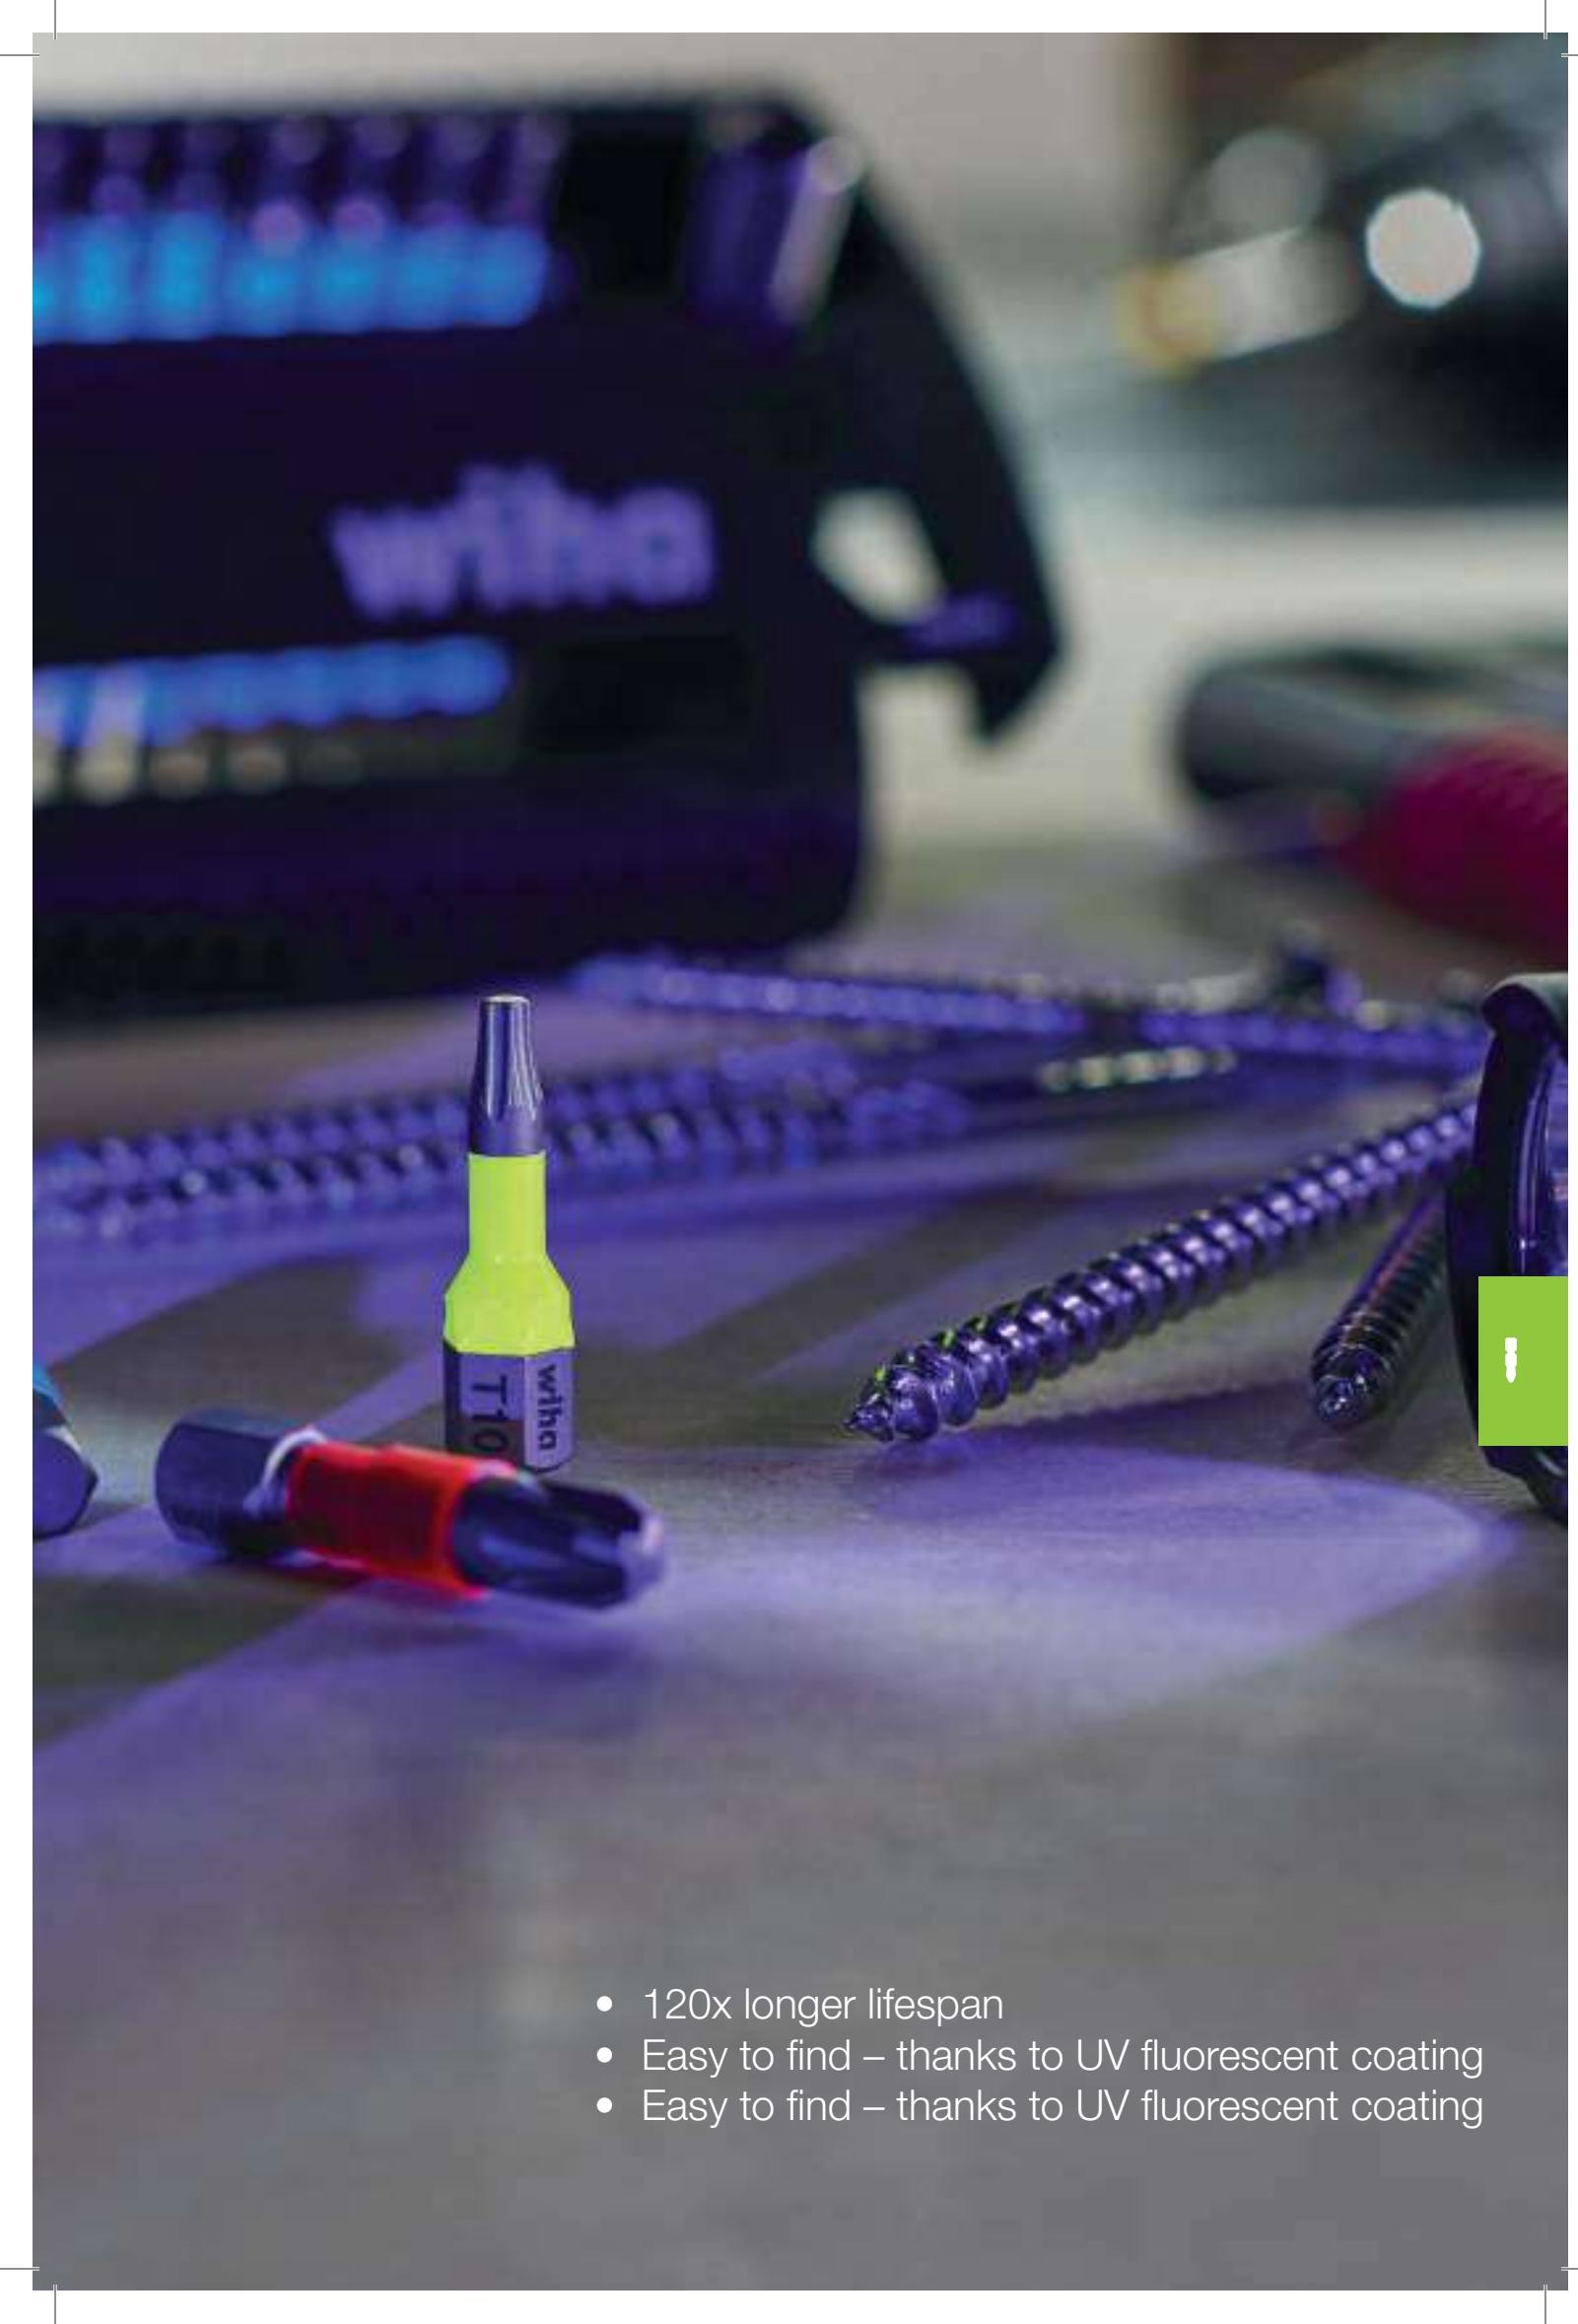

- 120x longer lifespan
- Easy to find – thanks to UV fluorescent coating
- Easy to find – thanks to UV fluorescent coating



**FlipSelector Y bit set,
25 mm TORX®
14-pcs. 1/4" C6,3**
Order no. 41828
Page 239


**XLSelector Y bit set,
25 mm Phillips,
Pozidriv, TORX®,
32-pcs., 1/4" C6,3**
Order no. 41832
Page 238



120x longer lifespan



Easy to find – thanks to UV fluorescent coating

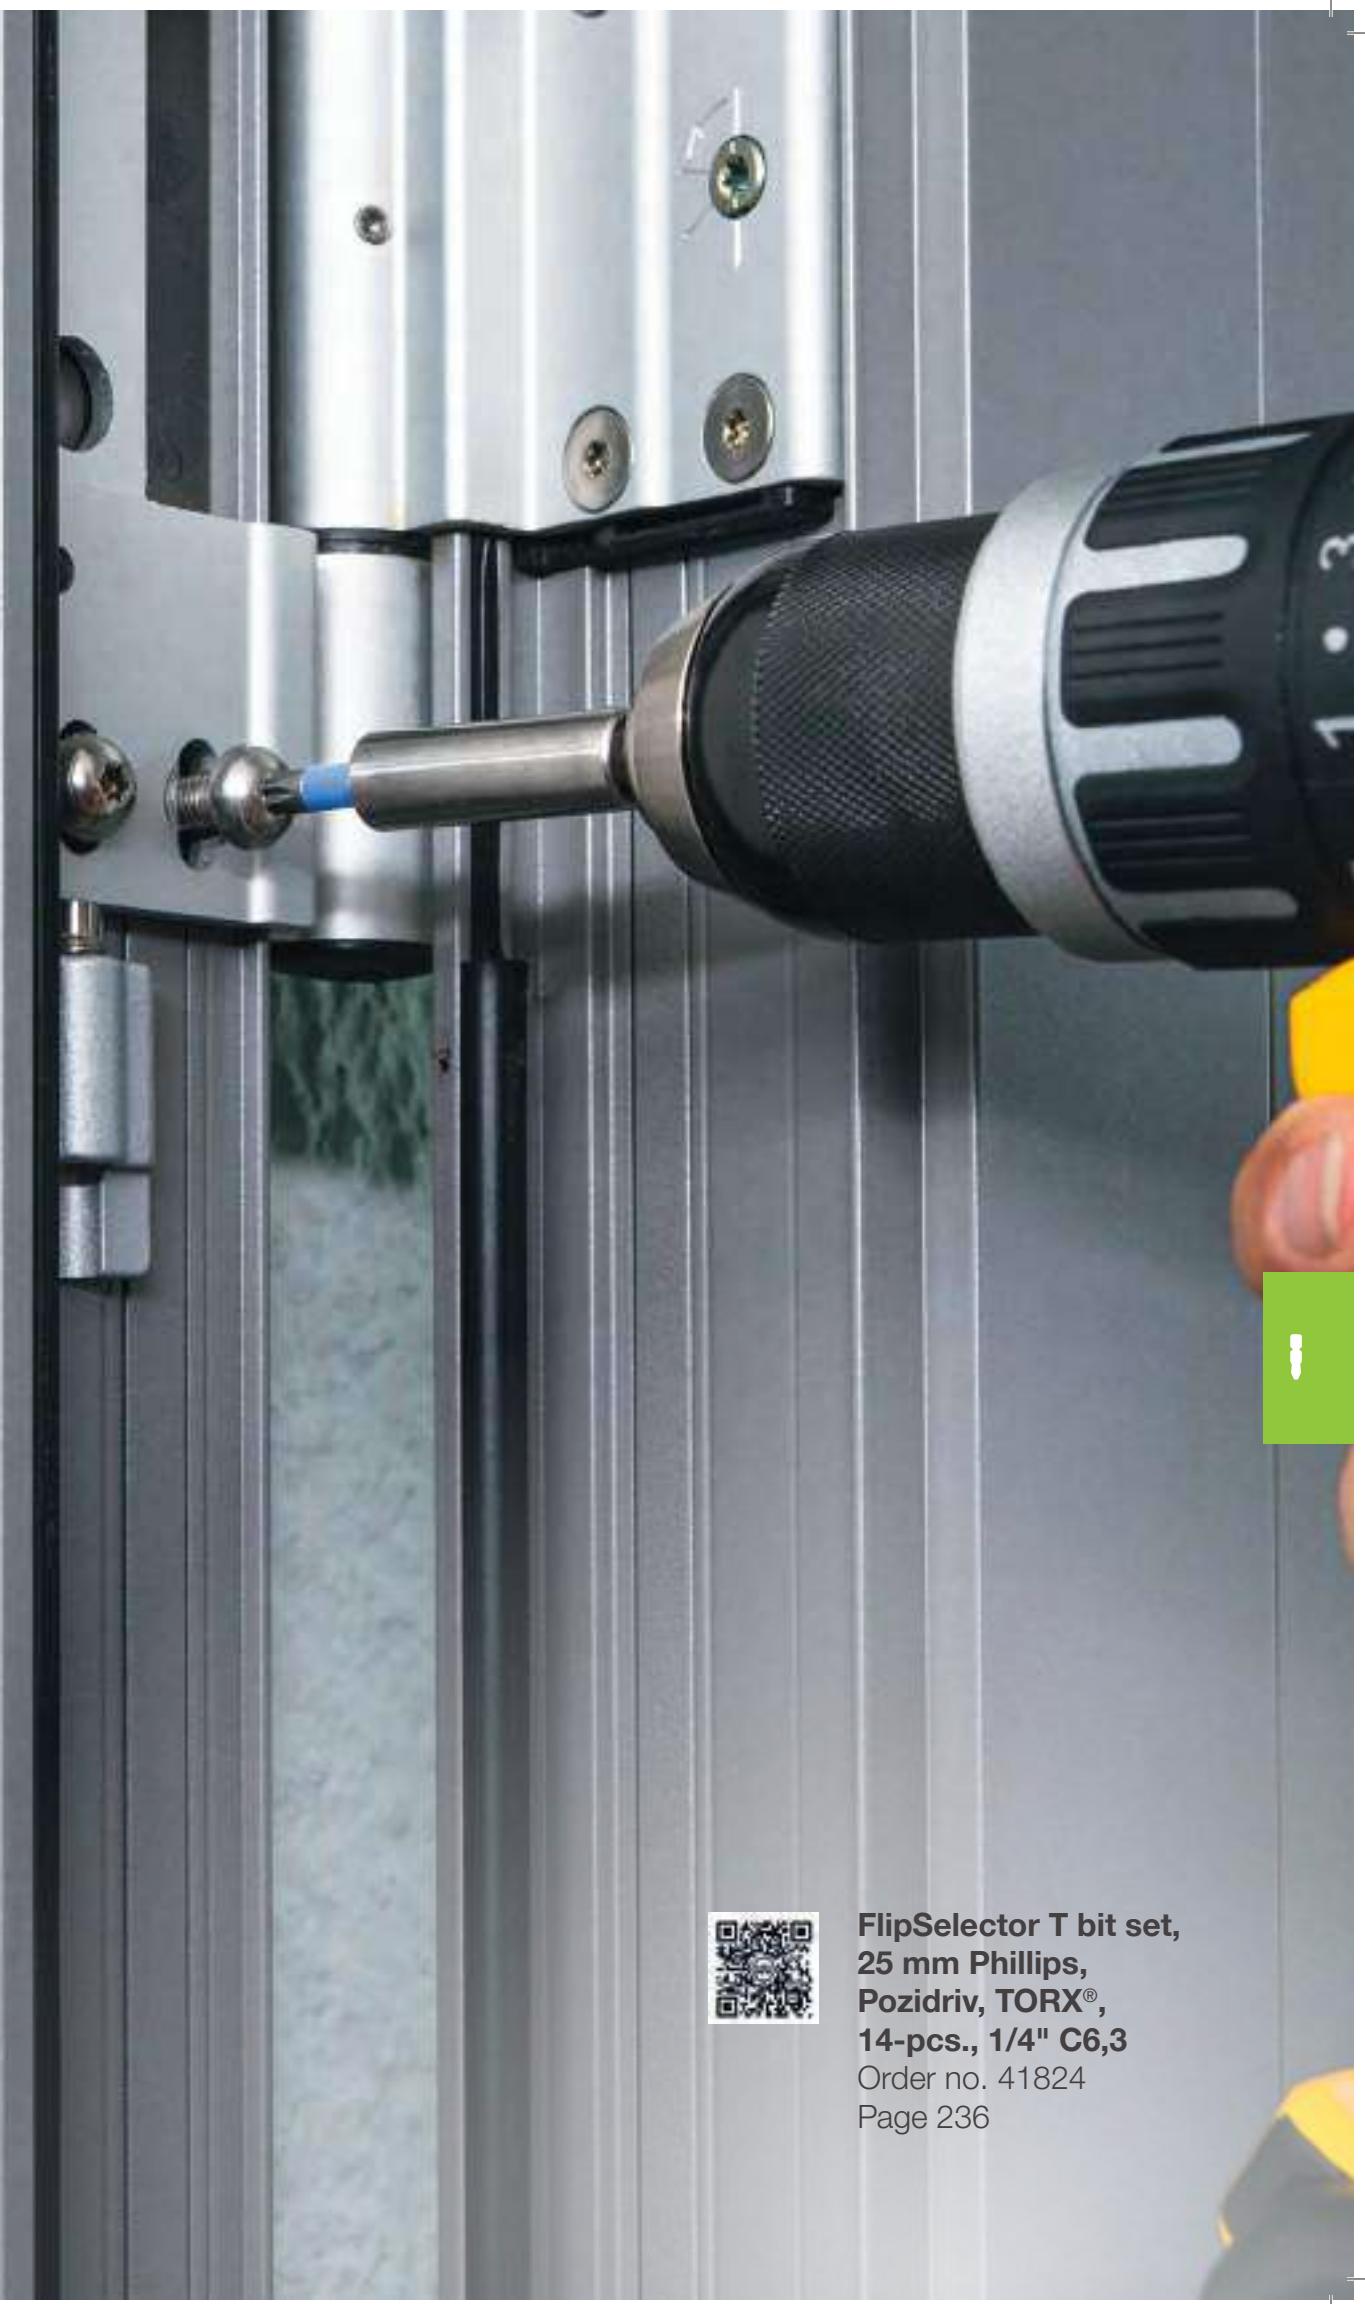

FlipSelector T bit set,
25 mm Phillips,
Pozidriv, TORX®,
14-pcs., 1/4" C6,3
Order no. 41824
Page 236



Bit holder CentroFix
Force mechanically
lockable 1/4",
magnetic in box
Order no. 39133
Page 260



Bit holder MagicFlip
Force magnetic with
ring magnet,
1/4" in box
Order no. 36800
Page 260





Bit holder CentroFix
Super Slim
mechanically lockable
1/4" in box
Order no. 39134
Page 260





Nut driver and bit set 1/4"
40 pcs. incl. multifunctional
bag with belt clip
Order no. 44684
Page 267



1/4"



Finely serrated miniature ratchet with right-left operation

High-quality, mobile 1/4" nut driver set



Nut driver and bit set
1/4" and 1/2"
60 pcs. incl. L Boxx
Order no. 44685
Page 266



1/4"

1/2"



High-quality 1/4" and 1/2" nut driver & ratchet set

Quick access thanks to a sorting system



**Professional BiCut®
high-performance diagonal
cutters with DynamicJoint®
Switchable**

Order no. 38984

Page 276





Installation pliers TriCut

Professional electric

Order no. 38552


Page 275



**Pliers set Professional electric
Combination pliers, needle nose
pliers, diagonal cutters 3-pcs.**

Order no. 26852


Page 274

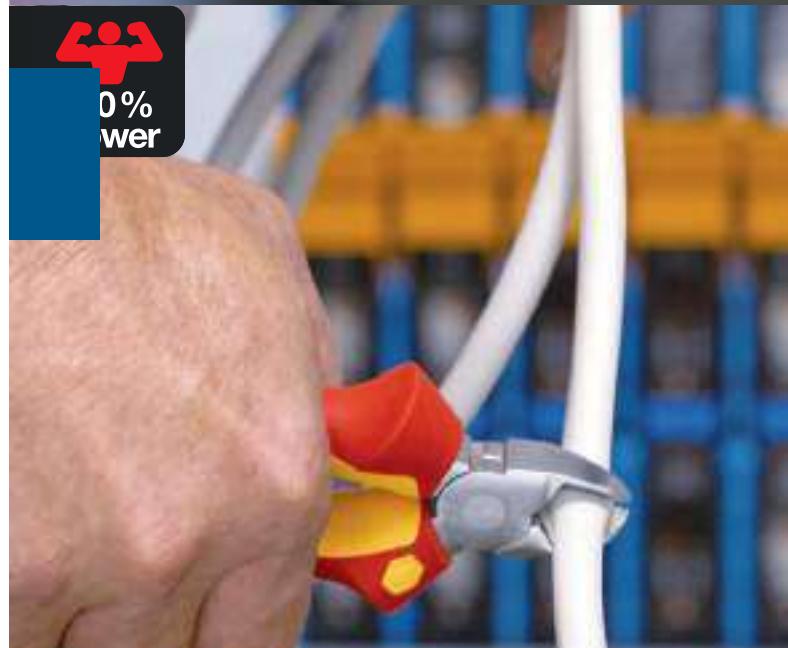

DynamicJoint® reduces the required force



Chrome-plated surface prevents rust

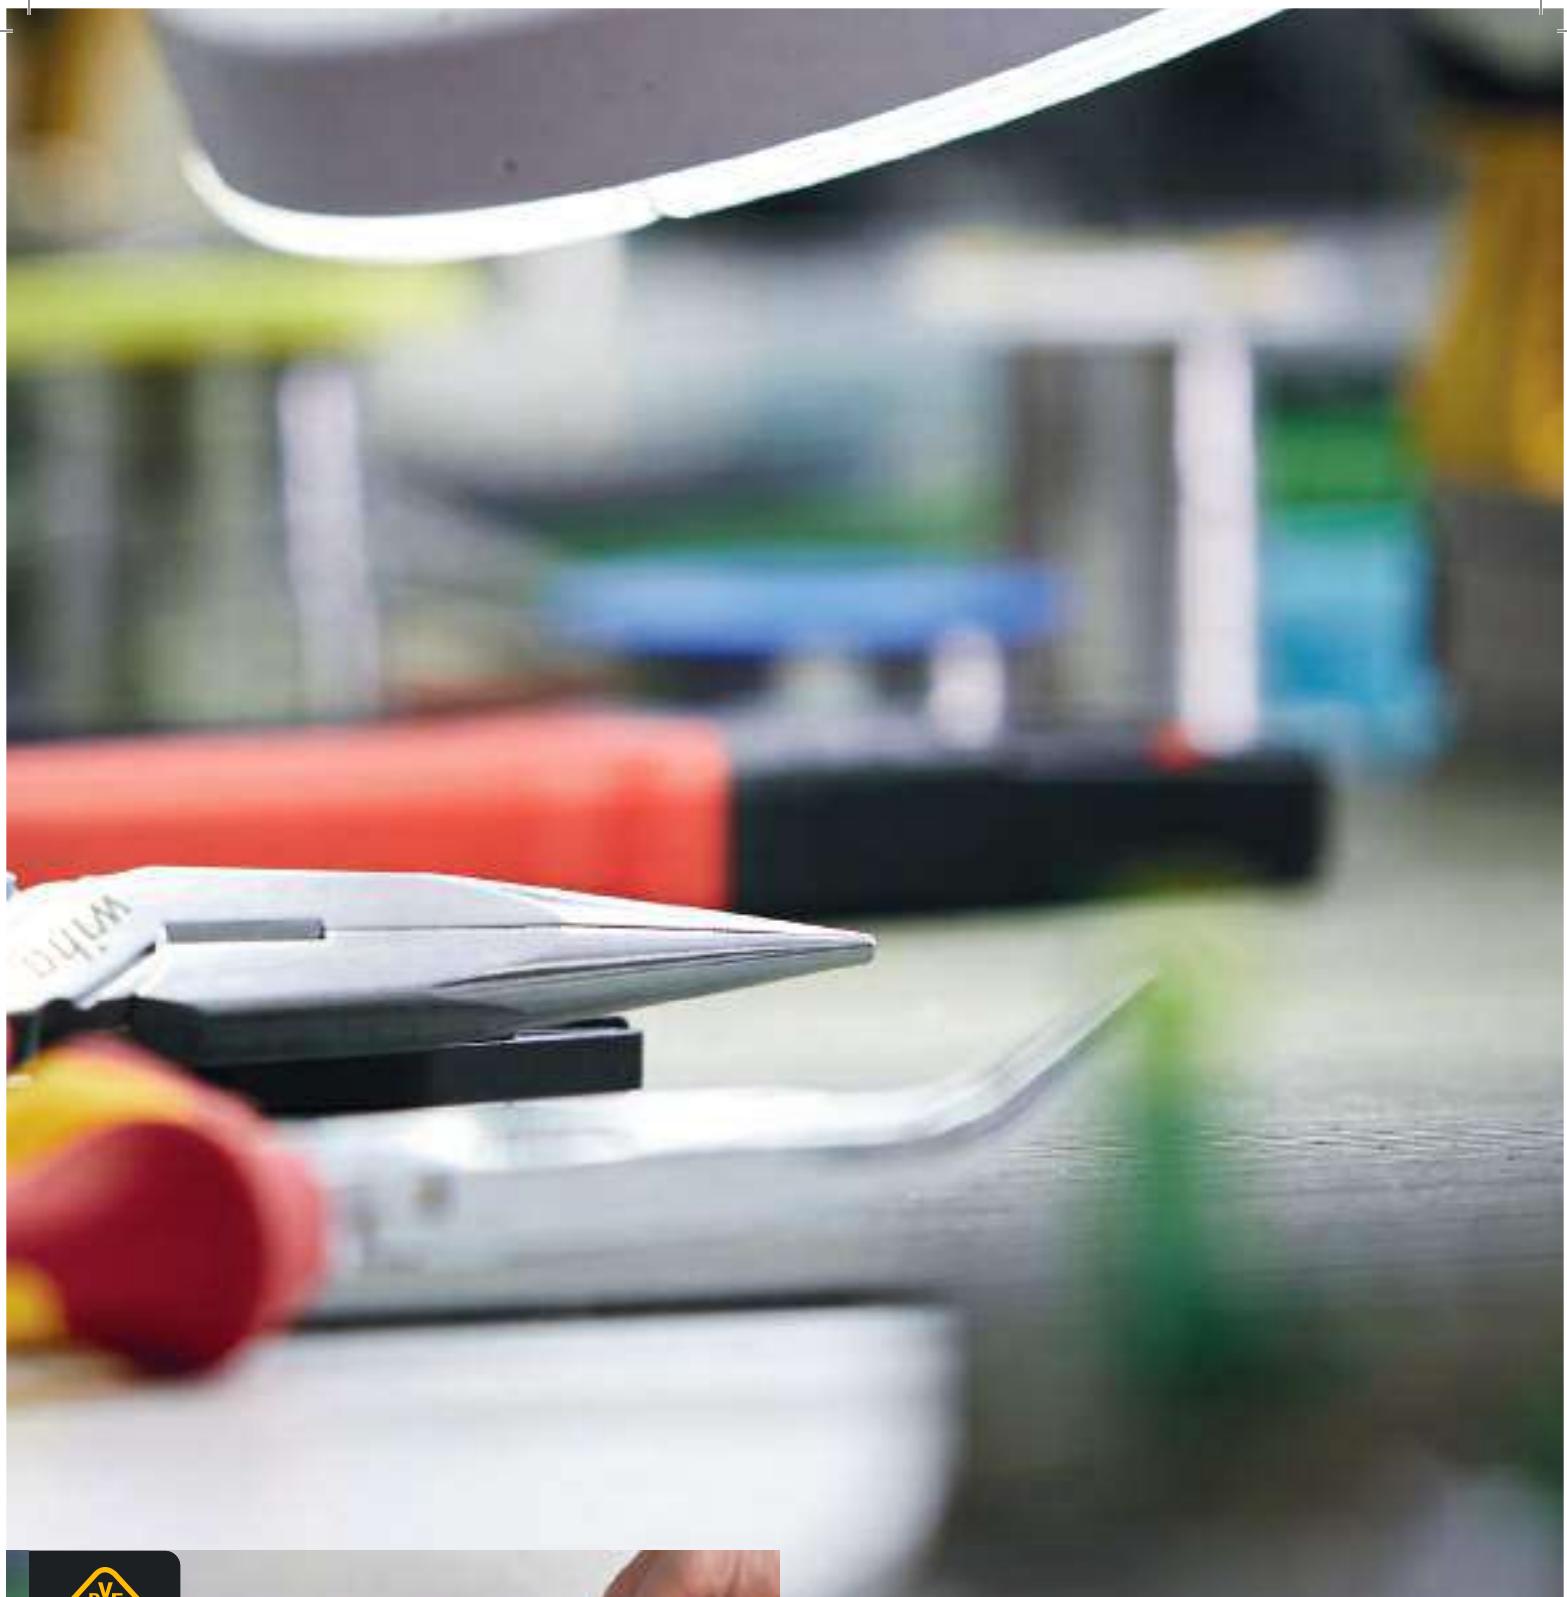

Safe, VDE-certified tools up to 1,000 V AC



**Stripping tool automatic
up to 16 mm² in blister pack**
Order no. 42062
Page 284




**Automatic crimp tool
for wire-end sleeves
hex crimping**
Order no. 41246
Page 286



Large insulated area from 0.03 - 16 mm².




Durable metal cutting insert

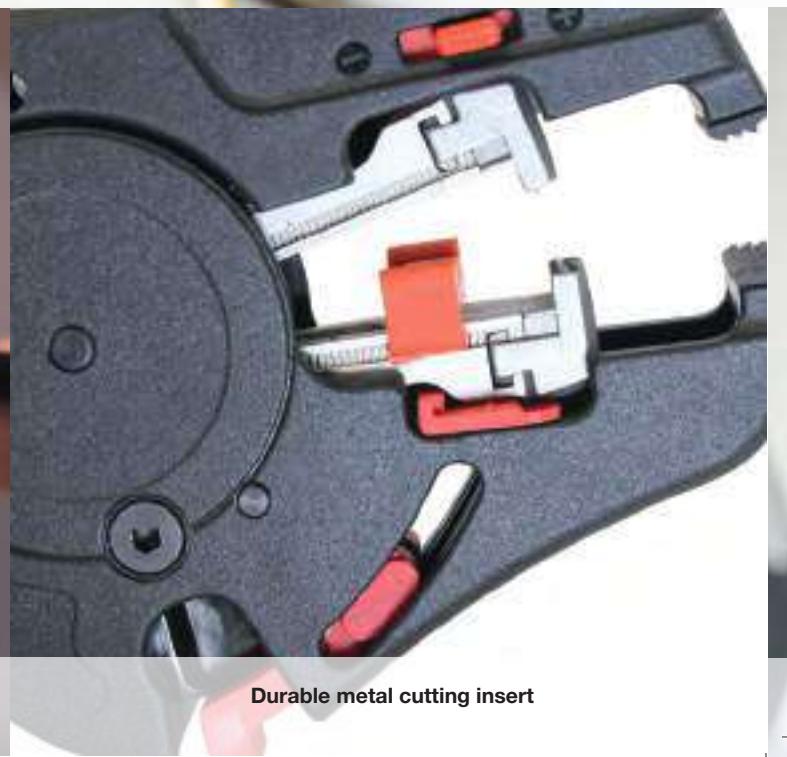



Large crimping range from 0.08 – 16mm²



High-quality hexagonal crimping





Pliers wrench Classic

Order no. 40923

Page 300



Self-locking from AF 17



Suitable for left-handers



Smooth brackets for sensitive surfaces



Quick fastening thanks to the ratchet function

Pliers set Professional High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs.

Order no. 26854

Page 289



DynamicJoint® reduces the required force



Three pliers for many applications



Pliers set Classic
with MagicTips®
Circlip pliers 4-pcs.
Order no. 34708
Page 290



Safety
Hold





Safe and sturdy grip on circlips



Professional BiCut®
high-performance
diagonal cutters with
DynamicJoint® Switchable
Order no. 38190
Page 291



Pliers set Professional ESD
Diagonal cutters, oblique end
cutting nippers, needle nose
pliers 5-pcs. incl. tool folder
Order no. 33507
Page 308

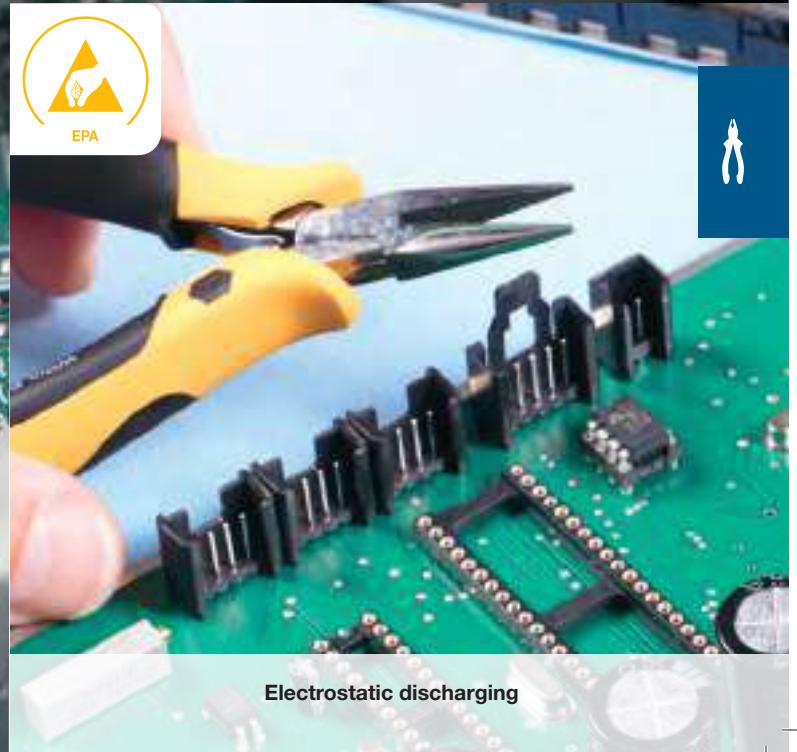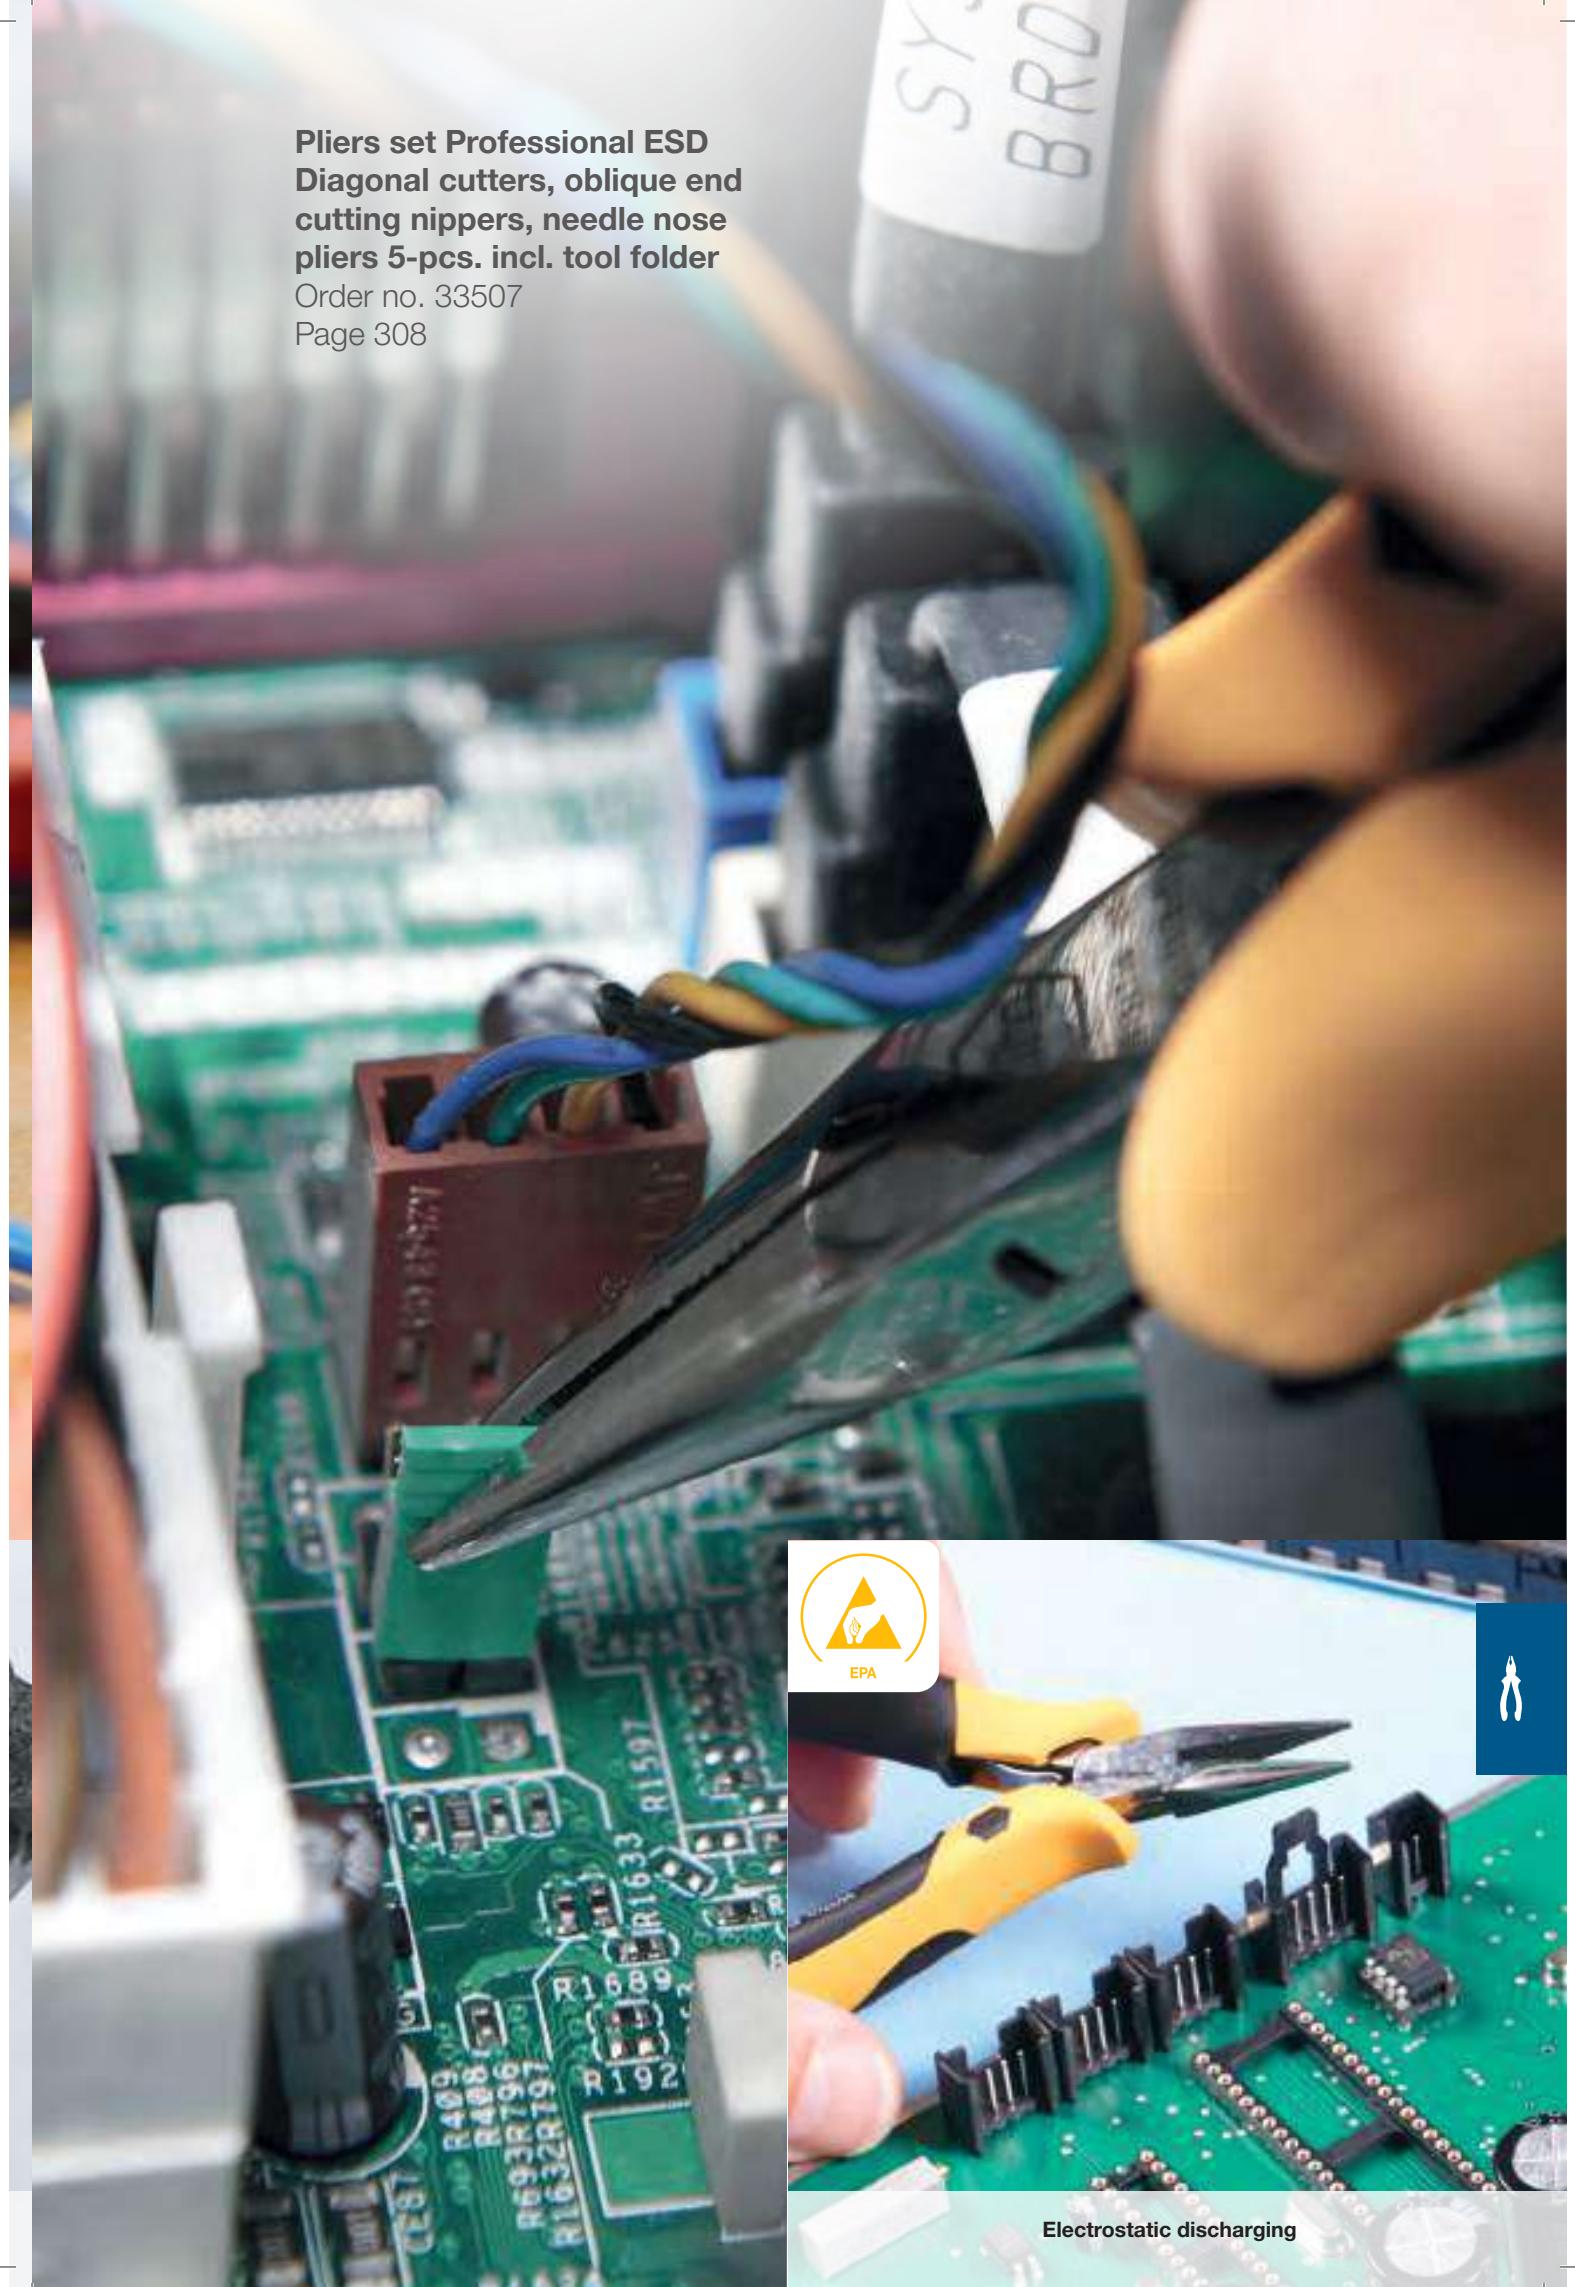

Electrostatic discharging



**SoftFinish® dowel
racket set with dowels
with 6 mm round blade
in blister pack, 5-pcs.**

Order no. 41289

Page 330

- Dirt and dust-free work
- With a laser scale for depth measurement
- Galvanic isolation in the handle
- Dowel holes with a hammer





**Electrician's hammer
with 300 g hammer
head, in blister pack**

Order no. 42071

Page 330

- With flat claws
- Optimal weight distribution
- Ideally suited for tight fits



**Soft-faced hammer set
"Safety" with assorted
hammer faces, 8-pcs. in box**

Order no. 44008

Page 324

- Replaceable hammer heads
- Reduces the required force
- Hickory wood hammer handle





**Soft-faced hammer dead-blow,
medium hard with steel tube
handle, round hammer face**

Order no. 02122

Page 328

- Replaceable hammer heads
- Reduces the required force
- Hammering with no recoil




**Electrician's
spirit level 40 cm**
Order no. 42074
Page 331






Perfect view of both bubbles

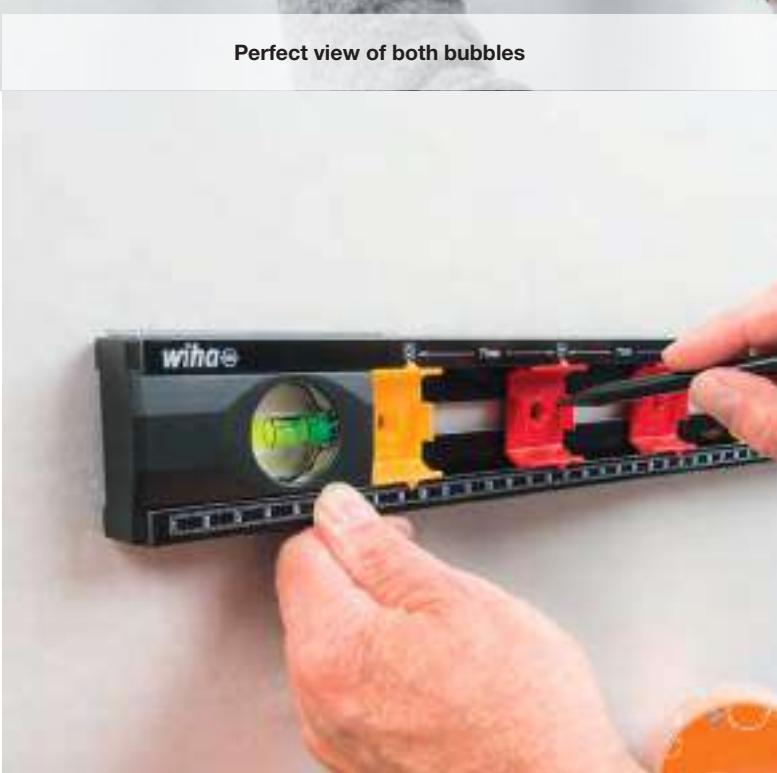

Cleverly positioned scales

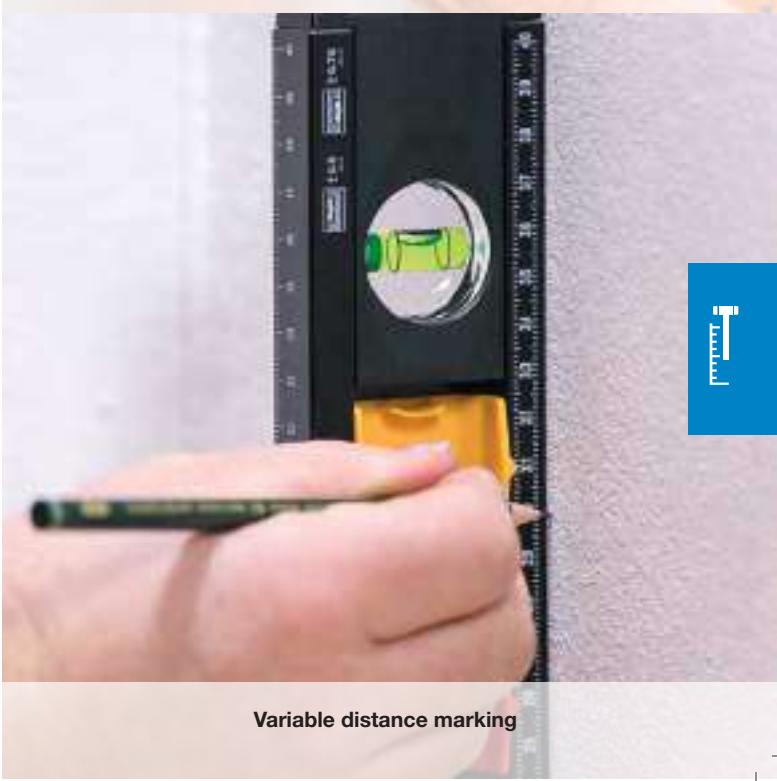

Variable distance marking

Content

	Tool case set XXL III electric assorted 106-pcs. incl. case Page 97		Tool set service technician assorted 31-pcs. incl. bag Page 100		Tool set slimVario® electric mixed, 32 pcs. incl. multifunctional bag Page 101		Tool set electrician Mixed, 13-pcs. incl. tool pouch Page 102
	E-screwdriver, speedE® II electric 7 pcs with slimBits, batteries and USB charger in L Boxx Mini Page 120		E-screwdriver, starter set speedE® I electric 4-pcs. incl. slimBit, battery and USB charger Page 120		speedE® Industrial e-screwdriver set TORX®, 5-pcs. with bit, battery and USB charger Page 123		Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries Page 124
	Screwdriver and bit set slimVario® screwdriver Page 130		slimBit electric bit set Slotted, 7-pcs. incl. SlimBit box Page 136		Screwdriver SoftFinish® electric slotted Page 140		Screwdriver SoftFinish® Slotted with round blade for low-lying screws Page 147
	Torque screwdriver set TorqueVario®-S electric Page 164		Torque screwdriver TorqueVario®-S electric Page 166		Torque screwdriver with T-handle TorqueVario®-S T electric Page 171		Torque screwdriver iTorque® with digital scale Page 172
	Screwdriver with bit magazine LiftUp electric Page 186		Screwdriver with bit magazine LiftUp 26one® Mixed with 13 double bits 1/4" in blister pack Page 187		Screwdriver with bit magazine Stubby Mixed with 7 double bits Page 187		Multitool PocketStar assorted 9-pcs. Page 190
	L-key set in ErgoStar holder Page 206		L-key set in ProStar holder Matt chrome-plated hexagonal ball end with short shaft, 10-pcs. Page 208		L-key set in ProStar holder Hexagonal ball end matt chrome-plated 10-pcs. Page 208		L-key set in ErgoStar holder TORX® MagicSpring®, 14- pcs., black oxidised Page 211
	BitBuddy® TY bit set, 49 mm Pozidriv 8-pcs. 1/4" E6,3 Page 232		XLSelector T bit set, 25 mm Phillips, TORX®, hex 32-pcs. 1/4" C6,3 Page 236		XLSelector Y bit set, 25 mm TORX® 32-pcs. 1/4" C6,3 Page 238		TY bit set 29 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 235
	Nut driver and bit set 1/4" and 1/2" 60 pcs. incl. L Boxx Page 266		Nut driver and bit set 1/4" 40 pcs. incl. multifunctional bag with belt clip Page 267		Ratchet wrench set, 1/4" 17 pcs. incl foam insert Page 268		Ratchet wrench set, 1/2" 26 pcs. incl foam insert Page 268
	Installation pliers TriCut Professional electric 1/4" in blister pack Page 275		Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable Page 276		Plier wrench Professional electric Page 282		Automatic crimp toolFor wire-end sleeves square crimping with rotating crimping head Page 287
	Soft-faced hammer set "Safety" with assorted hammer faces, 8-pcs. in box Page 324		Soft-faced hammer "Safety" medium soft/hard Page 325		Soft-faced hammer dead-blow, medium hard Page 328		Electrician's hammer with 300 g hammer head, in blister pack Page 330
	Stripping and crimping tool set 4-pcs. with cable connectors 2,600 pcs. colour code DIN in assortment box Page 336		Stripping and crimping tool set 5-pcs. with wire end ferrules 500 pcs. colour code DIN in L-Boxx Mini Page 337		Wire-end sleeves display Colour code DIN, 0.5 - 10 mm² in polyester bag and 0.5 - 16 mm² in organiser box Page 338		Wire end sleeves with plastic collar set 0.5-2.5 mm², 400 units, DIN colour code, in dispenser Page 339

	Ratchet wrench set insulated 1/2" 21-pcs. incl. case Page 105		Single open-end spanner set, insulated 6-32 mm 21-pcs. incl. case Page 106		Tool set mechanic Mixed, 34-pcs. incl. tool pouch Page 111		Tool set ESD Pliers, screwdriver, tweezers, 10-pcs. incl. tool pouch Page 113
	Single-pole, non- contact voltage tester volt detector, explosion protected 12-1,000 VAC Page 125		Torque QuickCheck torque testing device set 4 pcs. with adapter blades, batteries, and box Page 126		Voltage and continuity tester, 12 – 1,000 V AC, CAT IV incl. 2x AAA batteries Page 125		
	Screwdriver SoftFinish® Slotted with short round blade Page 152		Fine screwdriver set PicoFinish® Slotted, Phillips 7-pcs. Page 153		Screwdriver MicroFinish® TORX® with round blade Page 156		Screwdriver SoftFinish® ESD Slotted Page 158
	Torque screwdriver TorqueFix® Page 174		Torque screwdriver with T-handle TorqueVario®-S T Page 178		Torque screwdriver TorqueVario®-S ESD Page 181		
	Nut driver insert gripper 3/8" in blister pack Page 194		Screwdriver with interchangeable blade set SYSTEM 6 Page 195		Screwdriver with interchangeable blade set SYSTEM 4 ESD, Page 202		Screwdriver with interchangeable blade set SYSTEM 4 Page 200
	L-key set in ProStar holder TORX®, 14-pcs., black oxidised Page 214		L-key set in Classic holder TORX®, 9-pcs., short, black oxidised Page 214		L-key with T-handle ComfortGrip Page 216		L-key with key handle TORX®, black oxidised Page 217
	T bit set, 25 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 237		Y bit set, 25 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 240		Bit Professional Slotted 1/4" E6,3 Page 250		Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box Page 260
	Ring ratchet open- ended spanner set 13 pcs. switchable, with holder Page 270		Ring ratchet open- ended spanner set 13 pcs. with holder Page 270		Ring ratchet open- ended spanner set 8 pcs. with holder Page 271		Double open-end spanner set 13 pcs. with holder Page 271
	Stripping tool automatic up to 16 mm² in blister pack Page 284		Professional BiCut® high-performance diagonal cutters with DynamicJoint® Page 291		Pliers wrench Classic Page 300		Pliers set Professional ESD Page 308
	SoftFinish® dowel racket set with dowels with 6 mm round blade in blister pack, 5-pcs. Page 330		Electrician's spirit level 40 cm Page 331		Electrician's Longlife® folding ruler, 2 m metric, 10 segments Page 332		
	Twin wire end sleeves with plastic collar set 2 x 0.75 - 2 x 2.5 mm², 200 units, DIN colour code, in dispenser Page 339		Wire end sleeves with plastic collar set 100 units, colour code 1 (FR) / DIN Page 340		Twin wire end ferrules with plastic collar 100 units, colour code 1 (FR) & DIN Page 342		Type cable socket, ring-shaped, insulated 100 units as per DIN Page 344





Ranges

Designed for those who work with it.

The experiences of the user are taken into account right from the product development stage at Wiha tools. This ensures high-quality tool sets are designed for mechanics, electricians and electronics technicians which have been specifically compiled for their particular requirements and applications. Neatly stored and clearly organised in robust, compact tool bags, tools are ready at hand, ensuring work is completed easily and efficiently.

Wiha tools prove to be very handy, essential companions stored in a Wiha tool case, where the limitations of conventional tool cases have been eliminated: thanks to its practical tool pockets and extra storage space for small parts, the Wiha tool case provides simple, strain-free transport of your tools, offering greater convenience to make your work easier in every respect.



Application

Ranges

For applications in electrics

Tool case set XXL III electric assorted 106-pcs. incl. case
Page 97



Tool set service technician assorted 31-pcs. incl. bag
Page 100



Tool set slimVario® electric mixed, 32 pcs. incl. multifunctional bag
Page 101



Tool set electrician Mixed, 13-pcs. incl. tool pouch
Page 102



Tool set electrician Screwdriver, diagonal cutters, 7-pcs. incl. tool pouch
Page 103



Tool set electrician mixed, 18-pcs. incl. belt pouch
Page 104



Bit set for mounting 20-pcs. incl. roll-up bag
Page 114



Ratchet wrench set insulated 1/2"
21-pcs. incl. case
Page 105



Ratchet wrench set insulated 3/8"
21-pcs. incl. case
Page 105



Single open-end spanner set, insulated 6-32 mm
21-pcs. incl. case
Page 106



For applications in mechanics

Tool set mechanic Mixed, 34-pcs. incl. tool pouch
Page 111



Tool set mechanic Screwdriver, combination pliers, 7-pcs. incl. tool pouch
Page 111



For applications in electronics

Tool set ESD Pliers, screwdriver, tweezers, 10-pcs. incl. tool pouch
Page 113



Tool case set XXL III electric



assorted 106-pcs. incl. case

930070103

Order-No.

44128



1

Fastening / jamming

- Tool set slimVario® electric mixed, 32 pcs. incl. multifunctional bag (43465)
slimBit electric bit Slotted 2.0 mm x 75 mm (43115) / 3.5 mm x 75 mm (41159) / 5.5 mm x 75 mm (34581) / 6.5 mm x 75 mm (34582) / slimBit electric bit Phillips PH0 x 75 mm (43116) / PH1 x 75 mm (34583) / PH2 x 75 mm (34584) / slimBit electric bit PlusMinus/Pozidriv SL/PZ1 x 75 mm (34589) / SL/PZ2 x 75 mm (34590) / slimBit electric bit Pozidriv PZ1 x 75 mm (34585) / PZ2 x 75 mm (34586) / slimBit electric bit Hex 3.0 mm x 75 mm (37147) / 4.0 mm x 75 mm (37225) / 5.0 mm x 75 mm (37226) /
- slimBit electric bit TORX® T10 x 75 mm (35507) / T15 x 75 mm (35508) / T20 x 75 mm (35509) / T25 x 75 mm (36071) / Insulated nut driver insert 1/4" hexagon head 5.0 mm (43089) / 5.5 mm (43090) / 6.0 mm (43091) / 7.0 mm (43092) / 8.0 mm (43093) / 10.0 mm (43095) / 11.0 mm (43096) / 13.0 mm (43098) / slimVario® electric adapter for 1/4" nut driver 6.0 mm (43139) / Extension slimVario® electric for slimBits 6.0 mm (43292) / Screwdriver with bit holder SoftFinish® slimVario® electric / Fine screwdriver PicoFinish® slimVario® electric / Screwdriver with bit holder SoftFinish® electric slimVario Stubby / multifunctional bag

- XLSelector Y bit set, 25 mm Phillips, Pozidriv, TORX®, 32-pcs., 1/4" C6,3 (41832)
1 x Y-Bit 25 mm Phillips 1/4" PH1 / 4 x Y-Bit 25 mm Phillips 1/4" PH2 / 1 x Y-Bit 25 mm Phillips 1/4" PH3 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 4 x Y-Bit 25 mm Pozidriv 1/4" PZ2 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ3 / 2 x Y-Bit 25 mm TORX® 1/4" T10 / 3 x Y-Bit 25 mm TORX® 1/4" T15 / 3 x Y-Bit 25 mm TORX® 1/4" T20 / 3 x Y-Bit 25 mm TORX® 1/4" T25 / 3 x Y-Bit 25 mm TORX® 1/4" T30 / 2 x Y-Bit 25 mm TORX® 1/4" T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x XLSelector

- Universal key with double joint with triangular heads, square heads and double bit 7-9- 5 - 8- 3 - 5 (44001)

- L-key set in ErgoStar holder hexagonal ball Magicring® 10-pcs. in fluorescent colour (41979)
1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm / ErgoStar holder

- Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12.0 mm x 200 mm (03231)

- Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 5.5 mm x 125 mm (35391) / 6.5 mm x 150 mm (35392)

- Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)

- Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ1 x 80 mm (36329) / SL/PZ2 x 100 mm (36330)

Supplying / holding

- Pliers wrench Classic 250 mm, 10" (40923)

- Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)

Stripping/ insulating / crimping

- Stripping tool automatic up to 16 mm² in blister pack 200 mm, 8" (42062)

- Automatic crimp tool for wire-end sleeves hex crimping 210 mm, 0.08 - 16 (41246)

- Crimping tools for insulated cable eyes and contacts 220 mm, 0.5 - 6 (33841)

- Installation pliers TriCut Professional electric 170 mm, 7" (38552)

- Stripping tool with self-rotating drag blade for round cables 4 - 28, 165 mm (44618)

Trimming / cutting

- Cable cutter Professional electric with switchable opening spring 180 mm, 7" (43660)

- Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable 200 mm, 8" (38191)

- Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)

- Hacksaw electric insulated with three saw blades 150 mm 280 mm (43125)

Surveying / marking / measuring / checking

- Single-pole, non-contact volt detector, 12-1,000 V AC Includes two AAA batteries 150 mm (43797)

- Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries 100 - 310 lm (41286)

- Electrician's Longlife® folding ruler, 2 m metric, 10 segments 15 mm (42068)

- Electrician's spirit level 40 cm 400 mm (42074)

Striking / chiselling

- Electrician's hammer with 300 g hammer head, in blister pack 283 mm (42071)

- SoftFinish® dowel racket set with dowels with 6 mm round blade in blister pack, 5-pcs. (41289)
1 x Dowel racket / 2 x 30 mm dowel / 2 x 40 mm dowel

Various

- SoftFinish® bottle opener Perfect for workshop and kitchen. (04703)

Storage

- Tool Case XXL III empty (44129)



Order-No.

40523

1

**Fastening / jamming**

- Screwdriver SoftFinish® electric Hex nut driver 5.5 mm x 125 mm (00856) / 7.0 mm x 125 mm (00858) / 8.0 mm x 125 mm (00859) / 10.0 mm x 125 mm (00861)
- ⊖ Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391) / 6.5 mm x 150 mm (35392)
- ⊕ Screwdriver SoftFinish® electric slimFix electric PlusMinus/Phillips SL/PH1 x 80 mm (35502) / SL/PH2 x 100 mm (35503)
- ⊗ Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ1 x 80 mm (36329) / SL/PZ2 x 100 mm (36330)
- ⊕ Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)
- ⊗ Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 80 mm (35395) / PZ2 x 100 mm (35396)
- ⊖ Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12.0 mm x 200 mm (03231) / 7.0 mm- 9- 5 - 8- 3 - 5 (36114)
- ⊖⊕⊗ Screwdriver with bit magazine LiftUp electric Phillips, PlusMinus/Pozidriv, slotted with 6 slimBits (38611) 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.5 mm / 1 x PH1 / 1 x PH2 / 1 x SL/PZ2
- L-key set in Compact holder Hexagonal ball end matt chrome-plated 10-pcs. (01418) 1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm / Compact holder
- Bit set XLSelector Standard 25 mm assorted 32-pcs. 1/4" C6,3 (29417)
- ⊖⊕⊗ 1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm / 2 x PH1 / 4 x PH2 / 1 x PH3 / 2 x PZ1 / 5 x PZ2 / 1 x PZ3 / 2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x XLSelector

Trimming / cutting

- ☒ Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable 200 mm, 8" (38191)
- ☒ Precision mechanic's diagonal cutters Classic with opening spring 125 mm, 5" (36189)
- ☒ Professional electric diagonal cutters with DynamicJoint® 180 mm, 7" (43340)

Supplying / holding

- Water pump pliers Professional electric with push button adjustment 250 mm (37450)
- Needle nose pliers Professional electric with cutting edge curved shape, approx. 40° 200 mm, 8" (26729)
- Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26708)
- Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)

Stripping/ insulating / crimping

- ☒ Installation pliers TriCut Professional electric 170 mm, 7" (38552)
- ☒ Automatic stripping tool up to 6 mm² 190 mm, 7 1/2" (44617)
- ☒ Stripping tool with self-rotating drag blade for round cables 4 - 28, 165 mm (44618)
- ☒ Crimping tools for wire-end sleeves 220 mm, 0.14 - 16 (33844)

Surveying / marking / measuring / checking

- Single-pole, non-contact volt detector, 90–1,000 VAC Includes two AAA batteries 150 mm (43798)
- ⊖ Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)
- Folding ruler Longlife 2 m metric, 10 segments 15 mm (27057)
- Control cabinet spirit level 20 cm (36859)

Storage

case



1000 V
IEC 60900



9300040

assorted 31-pcs. incl. bag

Order-No.

43879



1

Fastening / jamming

- ⊖ Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 5.5 mm x 125 mm (35391)
- ⊕ Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)
- ⊗ Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 80 mm (35395) / PZ2 x 100 mm (35396)
- ⊖ PicoFinish® fine screwdriver Slotted 1.5 mm x 40 mm (42384) / 2.0 mm x 40 mm (42388) / 2.5 mm x 50 mm (42391) / 3.0 mm x 50 mm (42394)
- ⊕ PicoFinish® fine screwdriver Phillips PH00 x 40 mm (42402) / PH0 x 50 mm (42401)
- ⊖ Switch cabinet key cross shape 7.0 mm- 9- 5 - 8- 3 - 5 (36114)
- ⊖ L-key set in Compact holder Hexagonal ball end matt chrome-plated 10-pcs. (01418)
1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm / Compact holder

Trimming / cutting

- ⊖ Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)
- ⊖ Electronic needle nose pliers narrow, short head straight form 135 mm, 5 1/3" (26801)
- ⊖ Electronic diagonal cutters wide, pointed head and wire trapping spring without bevelled edge 130 mm, 5 1/8" (26825)

Supplying / holding

- ⊖ Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)

Stripping/ insulating / crimping

- ⊖ Automatic stripping tool up to 6 mm² 190 mm, 7 1/2" (44617)
- ⊖ Stripping tool with self-rotating drag blade for round cables 4 - 28, 165 mm (44618)

Surveying / marking / measuring / checking

- ⊖ Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)

Storage

- ⊖ Tool kit

Tool set slimVario® electric



Functional bag



mixed, 32 pcs. incl. multifunctional bag

7209NK2002

Order-No.



43465

1

Fastening / jamming

- ⊖ slimBit electric bit Slotted 2.0 mm x 75 mm (43115) / 3.5 mm x 75 mm (41159) / 5.5 mm x 75 mm (34581) / 6.5 mm x 75 mm (34582)
- ⊕ slimBit electric bit Phillips PH0 x 75 mm (43116) / PH1 x 75 mm (34583) / PH2 x 75 mm (34584)
- ⊗ slimBit electric bit PlusMinus/Pozidriv SL/PZ1 x 75 mm (34589) / SL/PZ2 x 75 mm (34590)
- ⊛ slimBit electric bit Pozidriv PZ1 x 75 mm (34585) / PZ2 x 75 mm (34586)
- ∅ slimBit electric bit Hex 3.0 mm x 75 mm (37147) / 4.0 mm x 75 mm (37225) / 5.0 mm x 75 mm (37226)
- ✿ slimBit electric bit TORX® T10 x 75 mm (35507) / T15 x 75 mm (35508) / T20 x 75 mm (35509) / T25 x 75 mm (36071)
- Insulated nut driver insert 1/4" hexagon head 5.0 mm (43089) / 5.5 mm (43090) / 6.0 mm (43091) / 7.0 mm (43092) / 8.0 mm (43093) / 10.0 mm (43095) / 11.0 mm (43096) / 13.0 mm (43098)
- slimVario® electric adapter for 1/4" nut driver 6.0 mm (43139)
- Extension slimVario® electric for slimBits 6.0 mm (43292)
- Screwdriver with bit holder SoftFinish® slimVario® electric
- Fine screwdriver PicoFinish® slimVario® electric
- Screwdriver with bit holder SoftFinish® electric slimVario Stubby

Storage

multifunctional bag

Manufactured acc. to IEC 60900.

Empty

7209NRW

Order-No.

43474 1

INFOBOX: VDE-certified tools



Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

disconnect

- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

**Mixed, 33-pcs. incl. tool pouch**

9300035

Order-No.



41241

1

Fastening / jamming

- Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 5.5 mm x 125 mm (35391)
- Screwdriver SoftFinish® electric slimFix Phillips PH1 x 80 mm (35393) / PH2 x 100 mm (35394)
- Screwdriver with bit magazine magnetic assorted with 8 bits, 1/4"; (32901)
- 1 x 6.5 mm / 1 x PH1 / 1 x PH2 / 1 x PH3 / 1 x PZ2 / 1 x T15 / 1 x T20 / 1 x T25
- Bit set FlipSelector Standard 25 mm Phillips, Pozidriv, TORX®, 14-pcs., 1/4" C6,3 (39040)
- 2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x FlipSelector

Trimming / cutting

- Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)

Supplying / holding

- Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26708)

Stripping/ insulating / crimping

- Automatic stripping tool up to 6 mm² 190 mm, 7 1/2" (44617)

Surveying / marking / measuring / checking

- Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)
- Folding ruler Longlife 2 m metric, 10 segments 15 mm (27057)

Storage

- Tool kit

**Mixed, 13-pcs. incl. tool pouch**

9300025

Order-No.



36389

1

Fastening / jamming

- Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.5 mm x 125 mm (35501) / 5.5 mm x 125 mm (35391)
- Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 80 mm (35395) / PZ2 x 100 mm (35396)

Trimming / cutting

- Cable cutter Professional electric with switchable opening spring 210 mm, 8 1/4" (43662)

Supplying / holding

- Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)
- Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 180 mm, 7" (41274)

Stripping/ insulating / crimping

- Automatic stripping tool up to 6 mm² 190 mm, 7 1/2" (44617)
- Stripping tool with self-rotating drag blade for round cables 4 - 28, 165 mm (44618)

Surveying / marking / measuring / checking

- Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)
- Folding ruler LongLife Plus 2 m metric, 10 segments 15 mm (27059)

Storage

- Tool kit

1000 V
IEC 60900SLIM
TECHNOLOGY+40%
PowerDOCTORS
RECOMMEND

**Screwdriver, heavy-duty diagonal cutters, 8-pcs.
incl. tool pouch**

9300031

Order-No.



38020

1

Fastening / jamming

- ⊖ Screwdriver SoftFinish® electric slimFix Slotted 3.5 mm x 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391)
- ⊕ Screwdriver SoftFinish® electric slimFix Phillips PH2 x 100 mm (35394)
- ⊗ Screwdriver SoftFinish® electric slimFix Pozidriv PZ2 x 100 mm (35396)
- ⊗ Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ2 x 100 mm (36330)

Supplying / holding

- ☒ Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 160 mm, 6 1/2" (40921)

Storage

Tool kit

1000 V
IEC 60900+20%
PowerDOCTORS
RECOMMEND

**Screwdriver, diagonal cutters, 7-pcs. incl. tool
pouch**

9300018

Order-No.



33969

1

Fastening / jamming

- ⊖ Screwdriver SoftFinish® electric Slotted 3.5 mm x 100 mm (00822) / 4.5 mm x 125 mm (00824) / 5.5 mm x 125 mm (00826)
- ⊕ Screwdriver SoftFinish® electric Phillips PH1 x 80 mm (00847) / PH2 x 100 mm (00848)

Trimming / cutting

- ☒ Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)

Storage

Tool kit

**INFOBOX:
DynamicJoint®**



**+20%
Power**



**Wiha DynamicJoint® – A new dimension in strength and
durability**

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.



1000 V
IEC 60900



+20%
Power



Z99000206

screwdriver, heavy-duty diagonal cutters, 6-pcs.

incl. tool folder

Order-No.



26755

1

Fastening / jamming

- ⊖ Screwdriver SoftFinish® electric Slotted 3.5 mm x 100 mm (00822) / 5.5 mm x 125 mm (00826)

- ⊕ Screwdriver SoftFinish® electric Phillips PH2 x 100 mm (00848)

Supplying / holding

- ⊖ Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)

Trimming / cutting

- ⊖ Professional electric diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43335)

Storage

Tool kit



1000 V
IEC 60900



930050005

mixed, 18-pcs. incl. belt pouch

Order-No.



44574

1

Stripping/ insulating / crimping

- ⊖ Installation pliers TriCut Professional electric 170 mm, 7" (38552)

Supplying / holding

- ⊖ Needle nose pliers Professional electric with cutting edge straight shape 200 mm, 8" (26727)

Trimming / cutting

- ⊖ Professional electric diagonal cutters with DynamicJoint® 140 mm, 5 1/2" (43326)

Surveying / marking / measuring / checking

- ⊖ Electrician's Longlife® folding ruler, 2 m metric, 10 segments 15 mm (42068)

- ⊖ Flashlight with LED, laser and UV light in blister pack, including 3 AAA batteries 100 - 310 lm (41286)

- ⊖ Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip 3.0 mm (34745)

measure tape 5 m

Fastening / jamming

- ⊖ PicoFinish® electric fine screwdriver Slotted 1.5 mm x 50 mm (42374) / 2.5 mm x 65 mm (42376) / 3.5 mm x 100 mm (35446) / 4.0 mm x 100 mm (35390) / 5.5 mm x 125 mm (35391)

- ⊕ PicoFinish® electric fine screwdriver Phillips PH0 x 50 mm (42379) / PH0 x 65 mm (42378)

- ⊕ Screwdriver SoftFinish® electric slimFix Pozidriv PZ1 x 80 mm (35395)

- ⊕ Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv SL/PZ2 x 100 mm (36330)

- ⊕ Screwdriver SoftFinish® electric slimFix TORX® T10 x 100 mm (36536)

Storage

Tool Belt Pouch

INFOBOX: slimTECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Ratchet wrench set insulated 1/2"



21-pcs. incl. case

Order-No.

43024



1

Fastening / jamming

T-handle insulated for nut driver (43063)

Ratchet wrench insulated for nut drivers Switchable 1/2" (43053)

○ Insulated extension 1/2" square adapter for nut driver inserts, insulated 250 mm (43056) / 125 mm (43055)

○ Insulated nut driver insert 1/2" hexagon head 10.0 mm (43077) / 11.0 mm (43078) / 12.0 mm (43079) / 13.0 mm (43080) / 14.0 mm (43081) / 17.0 mm (43082) / 19.0 mm (43083) / 22.0 mm (43084) / 24.0 mm (43085) / 27.0 mm (43086) / 32.0 mm (43087)

● Insulated nut driver insert 1/2" hexagon head 4.0 mm (43100) / 5.0 mm (43101) / 6.0 mm (43102) / 8.0 mm (43103) / 10.0 mm (43104)

Storage

case

Manufactured according to EN/IEC 60900.

DIN EN IEC 60900

7208NK2001

21-pcs. incl. case

Order-No.

43023



1

T-handle insulated for nut driver (43062)

Ratchet wrench insulated for nut drivers Switchable 3/8" (43052)

○ Insulated extension 3/8" square adapter for nut driver inserts, insulated 125 mm (43057) / 250 mm (43058)

○ Insulated nut driver insert 3/8" hexagon head 8.0 mm (43065) / 10.0 mm (43066) / 11.0 mm (43067) / 12.0 mm (43068) / 13.0 mm (43069) / 14.0 mm (43070) / 16.0 mm (43071) / 17.0 mm (43072) / 18.0 mm (43073) / 19.0 mm (43074) / 21.0 mm (43075) / 22.0 mm (43076)

● Insulated nut driver insert 3/8" hexagon head 4.0 mm (43105) / 5.0 mm (43106) / 6.0 mm (43107) / 8.0 mm (43108)

Storage

case

DIN EN IEC 60900

7207NK2001



1



Ratchet wrench set insulated, 1/4"



21-pcs. in case

7209NK2001

Order-No.



43025

1

Fastening / jamming

Ratchet wrench insulated for nut drivers 1/4" switchable (43054)

Insulated extension 1/4" square adapter for nut driver inserts, insulated 75 mm (43059) / 150 mm (43060)

○ Insulated nut driver insert 1/4" hexagon head 4.0 mm (43088) / 5.0 mm (43089) / 5.5 mm (43090) / 6.0 mm (43091) / 7.0 mm (43092) / 8.0 mm (43093) / 9.0 mm (43094) / 10.0 mm (43095) / 11.0 mm (43096) / 12.0 mm (43097) / 13.0 mm (43098) / 14.0 mm (43099)

● Insulated nut driver insert 1/4" internal hexagon 3.0 mm (43109) / 4.0 mm (43110) / 5.0 mm (43111) / 6.0 mm (43112) / 8.0 mm (43113)

Storage

case

IEC 60900

Single open-end spanner set, insulated 6-32 mm



21-pcs. incl. case

5590NT20

Order-No.



43022

1

Single, insulated open-end spanner 6.0 mm, 90 mm (43026) / 7.0 mm, 90 mm (43027) / 8.0 mm, 100 mm (43028) / 9.0 mm, 100 mm (43029) / 10.0 mm, 110 mm (43030) / 11.0 mm, 110 mm (43031) / 12.0 mm, 130 mm (43032) / 13.0 mm, 135 mm (43033) / 14.0 mm, 145 mm (43034) / 15.0 mm, 150 mm (43035) / 16.0 mm, 160 mm (43036) / 17.0 mm, 160 mm (43037) / 18.0 mm, 175 mm (43038) / 19.0 mm, 175 mm (43039) / 22.0 mm, 195 mm (43040) / 24.0 mm, 225 mm (43041) / 27.0 mm, 250 mm (43042) / 30.0 mm, 290 mm (43043) / 32.0 mm, 310 mm (43044)

○ Adjustable spanner electric Adjustable between 0-30 mm 250 mm (43061)

Storage

case

DIN EN IEC 60900

TorqueVario®-S electric nut driver insert 1/4" set



Screwdriver and nut driver insert 1/4" set slim-Vario® electric



1000 V
IEC 60900

Mixed, 11-pcs., incl. adapters and folding bag

7209NK2003

Order-No.



43466

1

Fastening / jamming

slimVario® electric adapter for 1/4" nut driver 6.0 mm
(43139)

- Adapter TorqueVario-S electric for 1/4" nut driver (43128)
- Insulated nut driver insert 1/4" hexagon head 5.0 mm (43089) / 5.5 mm (43090) / 6.0 mm (43091) / 7.0 mm (43092) / 8.0 mm (43093) / 10.0 mm (43095) / 11.0 mm (43096) / 13.0 mm (43098)

Storage

Folding bag

mixed, 14-pcs. incl. folding bag

7209NK2004

Order-No.



43467

1

Fastening / jamming

- SoftFinish® electric screwdriver handle
- Extension slimVario® electric for slimBits 6.0 mm (43292)
- slimVario® electric adapter for 1/4" nut driver 6.0 mm (43139)
- slimBit electric bit Slotted 3.5 mm x 75 mm (41159) / 5.5 mm x 75 mm (34581)
 - Insulated nut driver insert 1/4" hexagon head 5.0 mm (43089) / 5.5 mm (43090) / 6.0 mm (43091) / 7.0 mm (43092) / 8.0 mm (43093) / 10.0 mm (43095) / 11.0 mm (43096) / 13.0 mm (43098)

Storage

Folding bag

Manufactured acc. to IEC 60900.

Single, insulated open-end spanner

5590N

Order-No.	Ø	mm	
43026	6.0	90	1
43027	7.0	90	1
43028	8.0	100	1
43029	9.0	100	1
43030	10.0	110	1
43031	11.0	110	1
43032	12.0	130	1
43033	13.0	135	1
43034	14.0	145	1
43035	15.0	150	1
43036	16.0	160	1
43037	17.0	160	1
43038	18.0	175	1
43039	19.0	175	1
43040	22.0	195	1
43041	24.0	225	1
43042	27.0	250	1
43043	30.0	290	1
43044	32.0	310	1

T-handle insulated for nut driver

24618T

Order-No.	mm	
43063	1/2"	200
43062	3/8"	200

Ratchet wrench insulated for nut drivers

7207NRW

Adjustable spanner electric**Switchable**

Order-No.	mm	
43053	1/2"	250
43052	3/8"	200
43054	1/4"	145

Adjustable between 0-30 mm

5590NA

Order-No.	mm	
43061	0 - 30	250

Insulated nut driver insert



Insulated nut driver insert



1/2" hexagon head

7208NS

Order-No.	mm		
43077	10.0	55	1
43078	11.0	55	1
43079	12.0	55	1
43080	13.0	55	1
43081	14.0	55	1
43082	17.0	55	1
43083	19.0	55	1
43084	22.0	55	1
43085	24.0	55	1
43086	27.0	55	1
43087	32.0	55	1

1/4" hexagon head

7209NS

Order-No.	mm		
43088	4.0	42	1
43089	5.0	42	1
43090	5.5	42	1
43091	6.0	42	1
43092	7.0	42	1
43093	8.0	42	1
43094	9.0	42	1
43095	10.0	42	1
43096	11.0	42	1
43097	12.0	42	1
43098	13.0	42	1
43099	14.0	42	1

Insulated nut driver insert



Insulated extension



3/8" hexagon head

7207NS

Order-No.	mm		
43065	8.0	45	1
43066	10.0	45	1
43067	11.0	45	1
43068	12.0	45	1
43069	13.0	45	1
43070	14.0	45	1
43071	16.0	45	1
43072	17.0	45	1
43073	18.0	45	1
43074	19.0	47	1
43075	21.0	47	1
43076	22.0	47	1

1/2" square adapter for nut driver inserts, insulated

7208NEX

Order-No.	mm		
43055	1/2"	125	1
43056	1/2"	250	1

3/8" square adapter for nut driver inserts, insulated

7207NEX

Order-No.	mm		
43057	3/8"	125	1
43058	3/8"	250	1

1/4" square adapter for nut driver inserts, insulated

7209NEX

Order-No.	mm		
43059	1/4"	75	1
43060	1/4"	150	1

Insulated nut driver insert**3/8" hexagon head**

7207NHS

Order-No.	mm	
43105	4.0	75
43106	5.0	75
43107	6.0	75
43108	8.0	75

1/4" internal hexagon

7209NHS

Order-No.	mm	
43113	8.0	65
43112	6.0	65
43111	5.0	65
43110	4.0	65
43109	3.0	65

Insulated nut driver insert**1/2" hexagon head**

7208NHS

Order-No.	mm	
43100	4.0	120
43101	5.0	120
43102	6.0	120
43103	8.0	120
43104	10.0	120

Tool set mechanic**Mixed, 34-pcs. incl. tool pouch**

9300026

Order-No.	
36390	1
⊖ Screwdriver SoftFinish® Slotted with round blade and lasered mm scale 4.0 mm x 100 mm (36085) / 5.5 mm x 125 mm (35397)	
⊕ Screwdriver SoftFinish® Phillips with round blade and lasered mm scale PH1 x 80 mm (36072) / PH2 x 100 mm (35398)	
○ Screwdriver with T-handle and two bit holders ComfortGrip magnetic 1/4" 150 mm (26179)	
Combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 200 mm, 8" (26713)	
Heavy-duty diagonal cutters Professional with DynamicJoint® with switchable opening spring 180 mm, 7" (41273)	
Water pump pliers Classic with push button 250 mm (26765)	
Folding ruler Longlife 2 m metric, 10 segments 15 mm (27057)	
Fastening / jamming	
Bit set FlipSelector Standard 25 mm Phillips, Pozidriv, TORX®, 14-pcs., 1/4" C6,3 (39040)	
⊕ ⊕ ★ 2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x FlipSelector	
L-key set in ErgoStar holder Hexagonal ball end MagicRing® matt chrome-plated 10-pcs. (37351)	
● 1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm / ErgoStar holder	
Storage	
Tool kit	

Tool set mechanic**Mixed, 33-pcs. incl. tool pouch**

9300024

Order-No.	
36388	1
⊖ Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3.0 mm x 100 mm (00687) / 5.5 mm x 125 mm (00698)	
⊕ Screwdriver SoftFinish® Phillips with round blade PH1 x 80 mm (00756) / PH2 x 100 mm (00759)	
○ Screwdriver with T-handle and bit holder magnetic 1/4" 150 mm (01481)	
☒ Diagonal cutters Classic with DynamicJoint® 160 mm, 6 1/2" (43332)	
Water pump pliers Classic box type 250 mm (26761)	
Folding ruler Longlife 2 m metric, 10 segments 15 mm (27057)	

Fastening / jamming

⊕ ⊕ ★ Bit set FlipSelector Standard 25 mm Phillips, Pozidriv, TORX®, 14-pcs., 1/4" C6,3 (39040)	2 x PH2 / 1 x PZ1 / 2 x PZ2 / 1 x PZ3 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 / 1 x Bit holder magnetic 58 mm 1/4" / 1 x FlipSelector
● L-key set in Compact holder Hexagon brilliant nickel-plated 10-pcs. (01222)	1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm / Compact holder

Storage

Tool kit


Screwdriver, combination pliers, 7-pcs. incl. tool pouch

9300019

Order-No.



33970

1

- ⊖ Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3.5 mm x 100 mm (00691) / 4.5 mm x 125 mm (00697) / 6.5 mm x 150 mm (00703)
- ⊕ Screwdriver SoftFinish® Phillips with round blade PH1 x 80 mm (00756) / PH2 x 100 mm (00759)
- ⊕ Combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26707)

Storage

Tool kit


Screwdriver, diagonal cutters, 7-pcs. incl. tool pouch

9300020

Order-No.




33971

1

- ⊖ Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3.5 mm x 100 mm (00691) / 4.5 mm x 125 mm (00697) / 6.5 mm x 150 mm (00703)
- ⊕ Screwdriver SoftFinish® Phillips with round blade PH1 x 80 mm (00756) / PH2 x 100 mm (00759)
- ⊖ Professional diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43334)

Storage

Tool kit

**INFOBOX:
OptiGrip**

Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Tool set mechanic**screwdriver, diagonal cutters, combination pliers, 6-pcs. incl. tool folder**

Z99000602

Order-No.

30824

1

- ⊖ Screwdriver SoftFinish® Slotted with round blade for low-lying screws 3.5 mm x 100 mm (00691) / 5.5 mm x 125 mm (00698)
- ⊕ Screwdriver SoftFinish® Phillips with round blade PH2 x 100 mm (00759)
- Combination pliers Industrial with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (30826)
- Industrial diagonal cutters with DynamicJoint® 160 mm, 6 1/2" (43333)

Storage

Tool kit

Tool set ESD**Pliers, screwdriver, tweezers, 10-pcs. incl. tool pouch**

9300041

Order-No.

43994

1

Supplying / holding

- ⊖ Professional ESD needle nose pliers straight 120 mm, 4 3/4" (26799)
- ⊖ Professional ESD diagonal cutters wide, pointed head without bevelled edge 115 mm, 4 1/2" (26821)
- Universal tweezers Professional ESD Type AA 130 mm (32318)

Fastening / jamming

- ⊖ Fine screwdriver PicoFinish® ESD Slotted 2.0 mm x 40 mm (43670) / 2.5 mm x 50 mm (43671)
- ⊕ Fine screwdriver PicoFinish® ESD Phillips PH0 x 50 mm (43677) / PH00 x 40 mm (43676)
- ⊗ Fine screwdriver PicoFinish® ESD TORX® T5 x 40 mm (43698) / T6 x 40 mm (43699)

Storage

Tool kit

**INFOBOX:
Electrostatic
conductive ESD tools**

Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 - 10^9 ohms.

Belt pouch**Bit set for mounting****for e-screwdriver speedE®**

7209NEX

Order-No.

44367 1

79187T05

20-pcs. incl. roll-up bag

Order-No.

44576 1

- Bit Professional TORX® 1/4" E6,3 T15 (32307) / T20 (32308) / T25 (32309) / T30 (33923) / T40 (33928)
- Bit Professional Phillips 1/4" E6,3 PH0 (32105) / PH1 (33703) / PH2 (33704)
- Bit Professional PlusMinus/Pozidriv 1/4" E6,3 SL/PZ1 (32494) / SL/PZ2 (32496)
- Bit Professional Slotted 1/4" E6,3 3.5 mm (01792) / 4.0 mm (01794) / 5.5 mm (01796)
- Bit Professional Hexagon 1/4" E6,3 4.0 mm (04195) / 5.0 mm (04196) / 6.0 mm (04197)
- Bit holder magnetic, clamping with retaining ring 1/4" 100 mm (36092) / 150 mm (34306)
- Screwdriver with bit holder SoftFinish® magnetic 1/4" 112 mm (32160)

Storage

Roll-up bag Nylon



Stripping and crimping tool set 5-pcs.



Stripping and crimping tool set 5-pcs.



**With wire end sleeves, 500 units, colour code 1
(FR), in L Boxx Mini**

93001001

Order-No.



43985

1

Stripping/ insulating / crimping

- Automatic crimp tool for wire-end sleeves hex crimping 210 mm, 0.08 - 16 (41246)
- Stripping tool automatic up to 16 mm² in blister pack 200 mm, 8" (42062)
- Wire end sleeves with plastic collar set 0.5–2.5 mm², 400 units, colour code 1 (FR), in dispenser (43900)
50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 mm² /
100 x 1.5 mm² / 50 x 2.5 mm²
- Wire end sleeves with plastic collar set 4–16 mm², 100 units, colour code 1 (FR) in dispenser (43899)
50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

Storage

L Boxx Mini

**with wire end ferrules 500 pcs. colour code DIN
in L-Boxx Mini**

93001003

Order-No.



43987

1

Stripping/ insulating / crimping

- Automatic crimp tool for wire-end sleeves hex crimping
- Stripping tool automatic up to 16 mm² in blister pack
- Wire end sleeves with plastic collar set 0.5–2.5 mm², 400 units, DIN colour code, in dispenser (43904)
50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 mm² /
100 x 1.5 mm² / 50 x 2.5 mm²
- Wire end sleeves with plastic collar set 4–16 mm², 100 units, DIN colour code, in dispenser (43903)
50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

Storage

L Boxx Mini

Stripping and crimping tool set 4-pcs.



With connection elements, 2,600 units, colour code 1 (FR), in assortment box

93001011

Order-No.

43982



1

- ◆ Automatic crimp tool for wire-end sleeves hex crimping
- Stripping tool automatic up to 16 mm² in blister pack
- Crimping tools for insulated cable eyes and contacts
- 0.5 mm² / 0.75 mm² / 1 mm² / 1.5 mm² / 2.5 mm² / 4 mm² / 6 mm² / 10 mm² / 16 mm²
- 0.5 - 1 mm²; M4 / 0.5 - 1 mm²; M5 / 1.5 - 2.5 mm²; M5 / 1.5 - 2.5 mm²; M6 / 4 - 6 mm²; M6 / 4 - 6 mm²; M8
- 0.5 - 1 mm² / 1.5 - 2.5 mm² / 4 - 6 mm²
- 0.5 - 1 mm² / 1.5 - 2.5 mm²
- 0.5 - 1 mm² / 1.5 - 2.5 mm²
- Box

with cable connectors 2,600 pcs. colour code DIN in assortment box

93001013

Order-No.

43984



1

- ◆ Automatic crimp tool for wire-end sleeves hex crimping
- Stripping tool automatic up to 16 mm² in blister pack
- Crimping tools for insulated cable eyes and contacts
- 0.5 mm² / 0.75 mm² / 1 mm² / 1.5 mm² / 2.5 mm² / 4 mm² / 6 mm² / 10 mm² / 16 mm²
- 0.5 - 1 mm²; M4 / 0.5 - 1 mm²; M5 / 1.5 - 2.5 mm²; M5 / 1.5 - 2.5 mm²; M6 / 4 - 6 mm²; M6 / 4 - 6 mm²; M8
- 0.5 - 1 mm² / 1.5 - 2.5 mm² / 4 - 6 mm²
- 0.5 - 1 mm² / 1.5 - 2.5 mm²
- 0.5 - 1 mm² / 1.5 - 2.5 mm²
- Box

Insert boxes set**16-pcs. for assortment box connector elements**

93001911R

Order-No.	
43995	1
8 x Insert 55 A9-1 for assortment box small	
8 x Insert 55 A9-1 for assortment box large	

Spare part: Insert boxes for the connection elements assortment box 43982 and 43984



Electro

Safety for professionals.

With the speedE® e-screwdriver, Wiha is revolutionising the screwdriver market. Whether handling delicate fastenings, long screws or very many screws, professionals have no trouble working with the e-screwdriver. The material protection function in particular makes the speedE® unique: At 0.4 Nm the electrical assistance stops automatically and allows the user to finish tightening the screw carefully by hand. In combination with the VDE certified slimBits the speedE® offers electricians full protection during their daily work.

The swivelling Wiha flashlight features an integrated laser, UV light and LED light with two lighting levels.

With Torque QuickCheck, Wiha is bringing the first portable quick tester for regular checks on torque tools onto the market, thus guaranteeing safe and precise work.

Application

Electro

Fastening

E-screwdriver, speedE® II electric
7 pcs with slimBits,
batteries and USB
charger in L Boxx Mini
Page 120



**E-screwdriver, starter
set speedE® I electric** 4-
pcs. incl. slimBit,
battery and USB
charger
Page 120



**speedE® Industrial
e-screwdriver set
TORX®, 5-pcs. with
bit, battery and USB
charger**
Page 123



Surveying / marking

**Flashlight with LED,
laser and UV light
in blister pack,
including 3 AAA
batteries**
Page 124



Testing

**Single-pole, non-
contact voltage tester
volt detector, explosion
protected 12-1,000 VAC
incl. 2x AAA batteries**
Page 125



**Torque QuickCheck
torque testing device
set** 4 pcs. with adapter
blades, batteries, and
box
Page 126



**Voltage and continuity
tester, 12 – 1,000 V AC,
CAT IV
incl. 2x AAA batteries**
Page 125





7 pcs with slimBits, batteries and USB charger in L Boxx Mini		591T101
Order-No.		591T101
44318	1	
Bit Power slimBit electric - SL/PZ2		
3.5 mm x 75 mm		
E-screwdriver handle speedE®		
Charger for battery type 18500 Li-Ion with USB		
Battery set 18500 Li-Ion 2 pieces in a box		



4-pcs. incl. slimBit, battery and USB charger	590T401
Order-No.	590T401
44351	1
SL/PZ1 x 75 mm	
E-screwdriver handle speedE®	
Charger for 18500 Li-ion batteries with USB and Europlug (41915)	
speedE power plug EU	
Battery set, 18500 Li-ion 2 units in box (41914)	

INFOBOX: Wiha speedE® II



E-screwdriver, speedE® II electric

- 3x faster than manual fastening.
- Made in Germany.
- Safe working up to 1,000 V AC.
- Manual torque fastening up to 12 Nm.
- Powerful ring LED light.
- Replaceable standard battery.
- Kind to hands and muscles.
- Fully compatible with the Wiha slimBit system.

INFOBOX: Wiha speedE®



E-screwdriver speedE®

- Power-assisted screw-driving halves working time.
- Thanks to the integrated material protection function, the electric assistance stops automatically at 0.4 Nm.
- Final screw tightening can then be carried out by hand.
- Recommended by doctors and therapists.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.

slimBit electric bit set



Power slimBit electric bit set



1000 V
IEC 60900



1000 V
IEC 60900



Slotted, Phillips, Pozidriv 7-pcs. incl. slimBit box

SB2831B903

Order-No.



43160

1

- 2.0 mm x 75 mm / 2.5 mm x 75 mm
 - PH0 x 75 mm / PH1 x 75 mm
 - PZ0 x 75 mm / PZ1 x 75 mm
- slimBit box

Tested according to IEC 60900.

Slotted, hex, 7-pcs. incl. slimBit box

SB2831PB901

Order-No.



44107

1

- 6,5 mm x 75 mm
 - 2,5 x 75 mm / 3 x 75 mm / 4 x 75 mm / 5 x 75 mm / 6 x 75 mm
- slimBit box

Tested according to IEC 60900.

Mixed 7-pcs. incl. slimBit box

SB2831B904

Order-No.



44366

1

- 2.5 mm x 75 mm
 - PH1 x 75 mm
 - PZ1 x 75 mm
 - SL/PZ1 x 75 mm
 - T9 x 75 mm / T10 x 75 mm
- slimBit box

Tested according to IEC 60900.

Mixed 7-pcs. incl. slimBit box

SB2831PB900

Order-No.



44106

1

- 5,5 mm x 75 mm
 - PH2 x 75 mm
 - SL/PZ2 x 75 mm
 - T15 x 75 mm / T20 x 75 mm / T25 x 75 mm
- slimBit box

Tested according to IEC 60900.

Charger for 18500 Li-ion batteries**with USB and Europlug**

Order-No.

41915 1

5992

with USB and UK plug

Order-No.

42766 1

5992

**Power plug****EU**

Order-No.

44363

599006

speedE power plug EU

**UK**

Order-No.

44364

599007

speedE power plug UK

Battery set, 18500 Li-ion**2 units in box**

599001

Order-No.

41914

6



TORX®, 5-pcs. with bit, battery and USB charger

590T601

Order-No.

43631

1

E-screwdriver handle speedE®



Bit holder with 50 mm bit T20

18500 Li-Ion battery

USB charger for battery type 18500 Li-Ion

**INFOBOX:
Wiha speedE®
Industrial**



E-screwdriver speedE®

- Recommended by doctors and therapists.
- Electric screw fastening with protection function to prevent damage to materials (max. 0.4 Nm).
- Fixing by hand with a deft touch.
- Work twice as fast thanks to three-step process.

Flashlight with LED, laser and UV light



in blister pack, including 3 AAA batteries

24670

Order-No.	LED	UV	LASER	Clip	C
41286	100 - 310 lm	Class 2	390 - 400 nm	two AAA batteries	-

INFOBOX:
**Flashlight with LED,
laser and UV light**



Universal work tool with integrated laser, UV light and LED light.

- Optimum positioning and variable light direction thanks to the magnetic base and swivel head.
- The installation position can be projected directly from the middle of a table when fitting lights to the ceiling.
- The integrated UV light is ideal for finding misplaced coloured fluorescent Wiha tools and for technical inspections.

Single-pole, non-contact volt detector, 12–1,000 V AC**Includes two AAA batteries**

Order-No.			mm		25513
43797	2x 1,5 V AAA	28.5	150	10	

Single-pole, non-contact volt detector, 90–1,000 VAC**Includes two AAA batteries**


Order-No.			mm		25514
43798	2x 1,5 V AAA	28.5	150	10	

**Single-pole, non-contact voltage tester volt detector, explosion protected 12–1,000 VAC****incl. 2x AAA batteries**

Order-No.			mm		25513
44309	2x 1,5 V AAA	28.5	150	10	

Voltage and continuity tester, 12 – 1,000 V AC, CAT IV**incl. 2x AAA batteries**

Order-No.			mm		25515
44319	two AAA batteries	28.5	240	10	

**INFOBOX:
Volt Detector****Testing pen for AC voltages.**

- Testing pen detects AC voltages of up to 230 V AC
- A bright red LED indicates AC voltages
- A current flow through the user's body is not necessary
- Complies with IEC 61010-1 safety standard: Measuring category CAT III 1,000 V
- Detects AC voltages within a field of 4 mm.
- CE compliant



4 pcs. with adapter blades, batteries, and box

2909

Order-No.	Nm	%	SB		
42086	2.8	2	-		1

**INFOBOX:
Torque QuickCheck**



Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario®-S and iTorque® torque screwdrivers whose torque range included 2.8 Nm.





Screwdrivers

We have the know-how at the tip of our fingers.

Unlike many standard tools available on the market, Wiha screwdrivers are optimally designed for users' requirements. Thanks to Wiha's screwdriver handle size concept, four handle sizes and lengths, optimally adapted to their specific fastening or work task, ensure health-friendly work practices. With SoftFinish, Wiha became the world's first and only hand tool manufacturer to have products honoured with the renowned AGR quality seal - a seal of approval accepted by medical professionals and officially recommended by doctors and therapists. Wiha screwdrivers featuring SoftFinish are available for dry applications, damp and oily applications and as VDE-certified, insulated screwdrivers for use when working on live parts.

Wiha is the world's first hand tool manufacturer to receive AGR (Association for healthy backs) certification for its Inomic pliers and ergonomic screwdriver handle size concept, a seal of approval accepted by medical professionals and officially recommended by doctors and physiotherapists.

Application


Screwdrivers

For applications in electrics

Screwdriver and bit set
slimVario® screwdriver
Slotted, Phillips,
Pozidriv, 10-pcs. incl.
folding bag
Page 130



Screwdriver set
SoftFinish® electric
slimFix
assorted 12-pcs.
Page 131



Screwdriver set
SoftFinish® electric
slimFix
Slotted, Phillips 6-pcs.
Page 132



Screwdriver with bit
holder set electric
slimVario®
Stubby 4 pieces with
slimBits
Page 134



slimBit electric bit set
Slotted, 7-pcs. incl.
SlimBit box
Page 136



Screwdriver SoftFinish®
electric slimFix
Slotted
Page 140



PicoFinish® electric fin
e screwdriver
Slotted
Page 141



PicoFinish® electric fin
e screwdriver
Slotted
Page 142



For applications in mechanics

Screwdriver set
SoftFinish®
assorted 12-pcs.
Page 143



Screwdriver set
SoftFinish®
Slotted, Phillips 6-pcs.
Page 143



Screwdriver set SoftFinish®
Slotted, Phillips hexagonal
blade and solid steel cap,
6-pcs.
Page 145



Fine screwdriver set Pic
oFinish®
8-pcs. mixed, includin
g tweezers for iPhone®/
Apple® devices
Page 145



Screwdriver SoftFinish®
Slotted with round
blade for low-lying
screws
Page 147



Screwdriver SoftFinish®
Slotted with one-piece
hexagonal blade and solid
steel cap
Page 151



Fine screwdriver set
PicoFinish®
Slotted, Phillips 7-pcs.
Page 153



Screwdriver SoftFinish®
Slotted with short round
blade
Page 152



Screwdriver set
MicroFinish®
Slotted, Phillips with
one-piece hexagonal
blade and solid steel cap,
5-pcs.
Page 156



Screwdriver
MicroFinish®
TORX® with round blade
Page 156



Screwdriver MicroFinish®
Slotted with one-piece
hexagonal blade and solid
steel cap
Page 158



Screw extractor set
Hex, 17-pcs. with spiral
drill bit incl. box
Page 160



For applications in electronics

Screwdriver set
SoftFinish® ESD
Slotted, Phillips 5-pcs.
Page 157



Fine screwdriver
set PicoFinish® ESD
Slotted, Phillips, 7 pcs.
incl. holder
Page 158



Screwdriver SoftFinish®
ESD
Slotted
Page 158



Screwdriver and bit set slimVario® screwdriver



Screwdriver and bit set slimVario® screwdriver



Mixed, 19-pcs. incl. folding bag

2831T18

Order-No.



41231

1

- 1 x Screwdriver with bit holder SoftFinish® electric slimVario
- 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits
- ⊖ 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm
- ⊕ 1 x PH1 / 1 x PH2
- ⊗ 1 x PZ1 / 1 x PZ2
- ⊗ 1 x SL/PZ1 / 1 x SL/PZ2
- ⊗ 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20
- 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm
- 1 x Folding bag

Manufactured acc. to IEC 60900.

Slotted, Phillips, Pozidriv, 10-pcs. incl. folding bag

2831T901

Order-No.



41232

1

- 1 x Screwdriver with bit holder SoftFinish® electric slimVario
- 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits
- ⊖ 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm
- ⊕ 1 x PH1 / 1 x PH2
- ⊗ 1 x PZ1 / 1 x PZ2
- 1 x Folding bag

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, PlusMinus/Pozidriv, 10-pcs. incl. folding bag

2831T902

Order-No.



41233

1

- 1 x Screwdriver with bit holder SoftFinish® electric slimVario
- 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits
- ⊖ 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm
- ⊗ 1 x PZ1 / 1 x PZ2
- ⊗ 1 x SL/PZ1 / 1 x SL/PZ2
- 1 x Folding bag

Manufactured acc. to IEC 60900.


INFOBOX: slimTECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Screwdriver set SoftFinish® electric slimFix

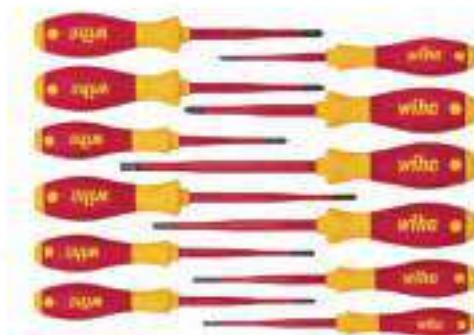


assorted 12-pcs.

3201K12

Order-No.	
41003	1
⊖	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
⊕	PH1 x 80 mm / PH2 x 100 mm
⊗	PZ1 x 80 mm / PZ2 x 100 mm
⊛	SL/PZ2 x 100 mm
⊛	T15 x 100 mm / T20 x 100 mm / T25 x 125 mm

Manufactured acc. to IEC 60900.

INFOBOX: Handle size concept

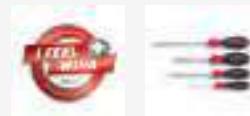

Wiha SoftFinish® handle sizes

- Every Wiha handle optimally balances guidance, speed and torque for the respective fastening task.
- Quick-turning - Motor skills are consistently taken into consideration.
- Maximum power transmission: comfortable and loss-free transmission of physical strength, even during intensive fastening.
- The power-turning and quick-turning zones (length) vary significantly over the four handle sizes in various forms.
- The Wiha SoftFinish screwdrivers enable work that is kind on the hands and muscles and is therefore recommended by doctors and therapists from the AGR.

INFOBOX: VDE-certified tools



Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

insulating personal protective equipment

- insulating safety mechanisms
- insulated tools
- Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

disconnect

- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components
- Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.

Screwdriver set SoftFinish® electric slimFix**Slotted, Phillips 6-pcs.**

3201K6

Order-No.	
35389	1
⊖	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
⊕	PH1 x 80 mm / PH2 x 100 mm

Manufactured acc. to IEC 60900.

Slotted, Phillips, PlusMinus/Pozidriv 6-pcs.

3201K601

Order-No.	
38362	1
⊖	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm
⊕	PH1 x 80 mm / PH2 x 100 mm
✳	SL/PZ2 x 100 mm

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs

3201ZK6

Order-No.	
36455	1
⊖	3.5 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
✳	PZ1 x 80 mm / PZ2 x 100 mm

Manufactured acc. to IEC 60900.

TORX® Tamper Resistant (with hole) 6-pcs.

3251TRK6

Order-No.	
41245	1
✳	T10H x 100 mm / T15H x 100 mm / T20H x 100 mm / T25H x 125 mm / T30H x 125 mm / T40H x 150 mm

Manufactured acc. to IEC 60900.

TORX® 6-pcs.

3251K6

Order-No.	
36558	1
✳	T8 x 60 mm / T9 x 60 mm / T10 x 100 mm / T15 x 100 mm / T20 x 100 mm / T25 x 125 mm

Manufactured acc. to IEC 60900. T8 + T9 no slim version.

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric slimFix**Slotted, PlusMinus/Pozidriv, 2-pcs.**

SB3201S204

Order-No.

36333

1

⊖ 3.5 mm x 100 mm

✳ SL/PZ2 x 100 mm

Manufactured acc. to IEC 60900.

**INFOBOX:
Combination profiles****PlusMinus.**

- The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.
- The combination profile reduces slipping out and guarantees a higher torque transmission.

Screwdriver set SoftFinish® electric



Slotted, Phillips 7-pcs.

320NK7

Order-No.	
00834	1
⊖	2.5 mm x 75 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
⊕	PH1 x 80 mm / PH2 x 100 mm
⌚	Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric



PlusMinus/Phillips pack 2-pcs.

SB327S2

Order-No.	
32281	1
⊕	SL/PH1 x 80 mm / SL/PH2 x 100 mm

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv, 2-pcs.

SB328S2

Order-No.	
32282	1
⊗	SL/PZ1 x 80 mm / SL/PZ2 x 100 mm

Manufactured acc. to IEC 60900.

Slotted, Phillips 6-pcs.

320NK6

Order-No.	
00833	1
⊖	3.0 mm x 100 mm / 4.0 mm x 100 mm / 5.5 mm x 125 mm / 6.5 mm x 150 mm
⊕	PH1 x 80 mm / PH2 x 100 mm

Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs

320NZK6SO

Order-No.	
25477	1
⊖	2.5 mm x 75 mm / 3.5 mm x 100 mm / 4.5 mm x 125 mm / 5.5 mm x 125 mm
⊗	PZ1 x 80 mm / PZ2 x 100 mm

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric



Fine screwdriver set PicoFinish® slimVario® electric



SB28310401

Hexagon nut driver 5-pcs.

322K5

Order-No.



29466

1

- 5.5 mm x 125 mm / 7.0 mm x 125 mm / 8.0 mm x 125 mm / 10.0 mm x 125 mm / 13.0 mm x 125 mm

Manufactured acc. to IEC 60900.

4-pcs. with slimBits

Order-No.



43167

Fine screwdriver PicoFinish® slimVario® electric

- 2.0 mm
- PH0
- PZ0

Manufactured acc. to IEC 60900.

Screwdriver with bit holder set electric slimVario®



Screwdriver with bit holder set SoftFinish® slimVario® electric



SB28310101

4-pcs. with slimBits

Order-No.

SB28310301



Order-No.



41230

1

- Screwdriver with bit holder SoftFinish® electric slimVario 3.5 mm
- PH2
- SL/PZ2

Manufactured acc. to IEC 60900.

Order-No.

5

- Screwdriver with bit holder SoftFinish® electric slimVario for slimBits 5.5 mm
- SL/PZ1 x 75 mm / SL/PZ2 x 75 mm

Manufactured acc. to IEC 60900.

Extension slimVario® electric**for slimBits**

2831

Order-No.
43292 6

**Fine screwdriver set PicoFinish® electric****slimVario® electric adapter****for 1/4" nut driver**

2831

Order-No.
43139 6.0 59 6

**Slotted, Phillips, 7 pcs. incl. holder**

2270PK601

Order-No.
42989 1

	1 x 1.5 mm x 50 mm / 1 x 2.0 mm x 50 mm / 1 x 2.5 mm x 65 mm / 1 x 3.0 mm x 65 mm
	1 x PH0 x 50 mm / 1 x PH0 x 65 mm
	1 x holder

**Screwdriver with bit holder SoftFinish® electric slimVario****for slimBits**

2831

Order-No.
34577 6.0 30 50 160 13 5

Manufactured acc. to IEC 60900.

**INFOBOX:
PicoFinish electric**


Wiha PicoFinish electric: The VDE-GS tested precision screwdriver.

- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.

slimBit electric bit set**TORX®, TORX PLUS®, 15-pcs. incl. slimBit boxes and belt holder**

SB2831B950

Order-No.



43161

1

- ∅ 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15
- ∅ 1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x 15IP
- 2 x slimBit box
- 1 x Belt holster for slimBit box

Tested according to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 15-pcs. incl. slimBit boxes and belt holder

SB2831B951

Order-No.



43162

1

- ⊖ 1 x 3.5 mm / 1 x 5.5 mm
- ⊕ 1 x PH1 / 1 x PH2
- ⊗ 1 x PZ1 / 1 x PZ2
- ⊗ 1 x SL/PZ1 / 1 x SL/PZ2
- ∅ 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25
- 2 x slimBit box
- 1 x Belt holster for slimBit box

Tested according to IEC 60900.

slimBit electric bit set**Slotted, 7-pcs. incl. SlimBit box**

SB2831B001

Order-No.



43152

1

- ⊖ 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.5 mm / 1 x 4.0 mm /
1 x 5.5 mm / 1 x 6.5 mm
- 1 x slimBit box

Tested according to IEC 60900.

TORX®, 7-pcs. incl. SlimBit box

SB2831B501

Order-No.



43153

1

- ∅ 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25
- 1 x slimBit box

Tested according to IEC 60900.

TORX®, 7-pcs. incl. SlimBit box

SB2831B502

Order-No.



43154

1

- ∅ 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15
- 1 x slimBit box

Tested according to IEC 60900.

TORX PLUS®, 7-pcs. incl. SlimBit box

SB2831B601

Order-No.



43155

1

- ∅ 1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x 15IP
- 1 x slimBit box

Tested according to IEC 60900.

Hex, 7-pcs. incl. SlimBit box

SB2831B801

Order-No.



43156

1

- ⊖ 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm /
1 x 5.0 mm / 1 x 6.0 mm
- 1 x slimBit box

Tested according to IEC 60900.

Slotted, Pozidriv 7-pcs. incl. SlimBit box

SB2831B900

Order-No.

43157



1

- 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm
- 1 x PZ1 / 1 x PZ2
- 1 x slimBit box

Tested according to IEC 60900.

Slotted, PlusMinus/Pozidriv 7-pcs. incl. SlimBit box

SB2831B901

Order-No.

43158



1

- 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm
- 1 x SL/PZ1 / 1 x SL/PZ2
- 1 x slimBit box

Tested according to IEC 60900.

Slotted, Phillips 7-pcs. incl. SlimBit box

SB2831B902

Order-No.

43159



1

- 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm
- 1 x PH1 / 1 x PH2
- 1 x slimBit box

Tested according to IEC 60900.

Slotted, Phillips, Pozidriv 7-pcs. incl. SlimBit box

SB2831B903

Order-No.

43160



1

- 1 x 2.0 mm / 1 x 2.5 mm
- 1 x PH0 / 1 x PH1
- 1 x PZ0 / 1 x PZ1
- 1 x slimBit box

Tested according to IEC 60900.

Mixed 7-pcs. incl. slimBit box

SB2831B904

Order-No.

44366



1

- 1 x 2.5 mm
- 1 x PH1
- 1 x PZ1
- 1 x SL/PZ1
- 1 x T9 / 1 x T10
- 1 x slimBit box

Tested according to IEC 60900.

Power slimBit electric bit setspeedE® II
PERFECT1000 V
IEC 60900**Mixed 7-pcs. incl. slimBit box**

SB2831PB900

Order-No.

44106



1

- 1 x Bit Power slimBit electric - Slotted 5.5
- 1 x Bit Power slimBit electric - PH2
- 1 x Bit Power slimBit electric - SL/PZ2
- 1 x Bit Power slimBit electric - T15 / 1 x Bit Power slimBit electric - T20 / 1 x Bit Power slimBit electric - T25
- 1 x slimBit box

Tested according to IEC 60900.

Slotted, hex, 7-pcs. incl. slimBit box

SB2831PB901

Order-No.

44107



1

- 1 x Bit Power slimBit electric - Slotted 6.5
- 1 x Bit Power slimBit electric - Innensechskant 2.5 / 1 x Bit Power slimBit electric - Innensechskant 3 / 1 x Bit Power slimBit electric - Innensechskant 4 / 1 x Bit Power slimBit electric - Innensechskant 5 / 1 x Bit Power slimBit electric - Innensechskant 6
- 1 x slimBit box

Tested according to IEC 60900.

slimBit electric bit**Slotted**

283110

Order-No.		mm		max Nm	
43114	1.5•	75	0.4	0.2	5
43115	2.0•	75	0.4	0.4	5
34578	2.5•	75	0.4	0.4	5
34579	3.0•	75	0.5	0.6	5
41159	3.5	75	0.6	1.4	5
34580	4.0	75	0.8	2.5	5
34581	5.5	75	1.0	3.8	5
34582	6.5	75	1.2	5.5	5

•no slim version

Manufactured acc. to IEC 60900.

Slotted with pivot

283110

Order-No.		mm		max Nm	
44385	3.5	75	0.6	1.4	5

Phillips

283111

Order-No.		mm		max Nm	
43116	PH0•	75	0.9		5
34583	PH1	75	3.8		5
34584	PH2	75	5.5		5

•no slim version

Manufactured acc. to IEC 60900.

Pozidriv

283112

Order-No.		mm		max Nm	
43117	PZ0•	75	0.9		5
34585	PZ1	75	3.8		5
34586	PZ2	75	5.5		5

•no slim version

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

283113

Order-No.		mm		max Nm	
34587	SL/PH1	75	3.8		5
34588	SL/PH2	75	5.5		5

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

283114

Order-No.		mm		max Nm	
34589	SL/PZ1	75	3.8		5
34590	SL/PZ2	75	5.5		5

Manufactured acc. to IEC 60900.

TORX®

283115

Order-No.		mm		max Nm	
43140	T5•	75	0.4		5
43141	T6•	75	0.6		5
43142	T7•	75	0.9		5
35506	T8•	75	1.3		5
41160	T9•	75	2.5		5
35507	T10•	75	3.8		5
35508	T15	75	5.0		5
35509	T20	75	5.5		5
36071	T25	75	5.5		5

•no slim version

Manufactured acc. to IEC 60900.

TORX PLUS®

283116

Order-No.		mm		max Nm	
43143	5IP•	75	0.5		5
43144	6IP•	75	0.8		5
43145	7IP•	75	1.3		5
43146	8IP•	75	2.0		5
43147	9IP•	75	3.0		5
43148	10IP•	75	4.5		5
43149	15IP•	75	5.5		5
43150	20IP•	75	5.5		5
43151	25IP•	75	5.5		5

•no slim version

Manufactured acc. to IEC 60900.

Hex

283118

Order-No.		mm		max Nm	
37222	1.5•	75	0.9		5
37223	2.0•	75	1.8		5
37224	2.5•	75	3.8		5
37147	3.0•	75	5.5		5
37225	4.0•	75	5.5		5
37226	5.0•	75	5.5		5
37227	6.0•	75	5.5		5

•no slim version

Manufactured acc. to IEC 60900.

Square

283117

Order-No.		mm		max Nm	
35510	#1	2.3		75	5.5
35511	#2	2.8		75	5.5

Manufactured acc. to IEC 60900.

slimBit box

SB2831B992

empty, 2-pcs. with belt clip

Order-No.

43164



1

2 x slimBit box

1 x Belt holster for slimBit box



2831

emptyOrder-No. 

43163 1

**INFOBOX:
slimTECHNOLOGY**
**Wiha SoftFinish® electric slimFix**

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Screwdriver SoftFinish® electric slimFix



Slotted

3201

Order-No.			mm		
35446	3.5	100	0.6	204	23 10
35390	4.0	100	0.8	211	30 10
35501	4.5	125	1.0	236	30 10
35391	5.5	125	1.0	243	36 10
35392	6.5	150	1.2	268	36 10

Manufactured acc. to IEC 60900.

Phillips

3211

Order-No.			mm		
35393	PH1	80	191	30	10
35394	PH2	100	218	36	10

Manufactured acc. to IEC 60900.

Pozidriv

3241

Order-No.			mm		
35395	PZ1	80	191	30	10
35396	PZ2	100	218	36	10

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

3271

Order-No.			mm		
35502	SL/PH1	80	191	30	10
35503	SL/PH2	100	218	36	10

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

3281

Order-No.			mm		
36329	SL/PZ1	80	191	30	10
36330	SL/PZ2	100	218	36	10

Manufactured acc. to IEC 60900.

TORX® Tamper Resistant (with hole)

3251TR

Order-No.			mm		
41141	T10H	100	204	23	10
41142	T15H	100	211	30	10
41143	T20H	100	211	30	10
41144	T25H	125	243	36	10
41145	T27H	125	243	36	10
41146	T30H	125	243	36	10
41147	T40H	150	268	36	10

Manufactured acc. to IEC 60900.

TORX®

3251

Order-No.			mm		
36536	T10	100	204	23	10
36537	T15	100	211	30	10
36538	T20	100	211	30	10
36539	T25	125	243	36	10
36540	T27	125	243	36	10
36541	T30	125	243	36	10
36542	T40	150	268	36	10

Manufactured acc. to IEC 60900.

Square

3581

Order-No.			mm		
35504	#1	2.3	211	10	
35505	#2	2.8	243	10	

Screwdriver SoftFinish® electric



Slotted

320N

Order-No.				mm		
00819	2.0	60	0.4	164	23	10
00820	2.5	75	0.4	179	23	10
00821	3.0	100	0.5	204	23	10
00822	3.5	100	0.6	204	23	10
00823	4.0	100	0.8	211	30	10
00824	4.5	125	1.0	236	30	10
00825	4.5	175	1.0	286	30	5
31863	4.5	200	1.0	311	30	5
00826	5.5	125	1.0	243	36	10
00827	5.5	175	1.0	293	36	5
00828	6.0	150	1.2	268	36	10
00829	6.5	150	1.2	268	36	10
00830	8.0	175	1.2	299	41	10
00831	8.0	175	1.6	299	41	10
00832	10.0	200	1.6	324	41	5

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

327

Order-No.				mm		
30716	SL/PH1	80		191	30	10
30715	SL/PH2	100		218	36	10

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

328

Order-No.				mm		
30700	SL/PZ1	80		191	30	10
30701	SL/PZ2	100		218	36	10

Manufactured acc. to IEC 60900.

TORX®

325

Order-No.				mm		
03760	T5	60		164	23	10
03761	T6	60		164	23	10
03762	T7	60		164	23	10
00881	T8	60		164	23	10
00882	T9	60		164	23	10

Manufactured acc. to IEC 60900.

Phillips

321N

Order-No.				mm		
00846	PH0	60		164	23	10
00847	PH1	80		191	30	10
00848	PH2	100		218	36	10
00849	PH3	150		268	41	10
00850	PH4	200		318	41	5

Manufactured acc. to IEC 60900.

Hex

323N

Order-No.				mm		
30361	2.5	75		179	23	10
30362	3.0	75		179	23	10
30363	4.0	75		186	30	10
30364	5.0	75		186	30	10
30365	6.0	100		218	36	10
30366	8.0	100		218	36	10

Manufactured acc. to IEC 60900.

Pozidriv

324

Order-No.				mm		
00877	PZ0	60		164	23	10
00878	PZ1	80		191	30	10
00879	PZ2	100		218	36	10
00880	PZ3	150		324	41	5

Manufactured acc. to IEC 60900.

Square

358N

Order-No.				mm		
32396	#1	2.3		100	211	30
32397	#2	2.8		150	268	36

Manufactured acc. to IEC 60900.

Screwdriver set SoftFinish® electric**Hex nut driver**

322

Order-No.			mm*			SB	
00853	4.0	125	236	30	10.2	10	
00855	5.0	125	236	30	11.2	10	
00856	5.5	125	236	30	11.2	10	
00857	6.0	125	236	30	12.2	10	
00858	7.0	125	243	36	14.5	10	
00859	8.0	125	243	36	15.2	10	
00860	9.0	125	243	36	16	10	
00861	10.0	125	243	36	17.2	10	
00864	13.0	125	243	41	22.2	5	
00862	11.0	125	243	41	19.2	5	
00865	14.0	125	243	41	23.2	5	
00863	12.0	125	243	41	20.2	5	
00866	15.0	125	243	41	25.2	5	
00867	16.0	125	243	41	25.2	5	
00868	17.0	125	243	41	27.2	5	

Manufactured acc. to IEC 60900.

Voltage tester SoftFinish® single-pole, 110-250 volts**Slotted transparent, with push-on clip**

25511

Order-No.			mm*		SB	
34745	3.0	60		140	19	-
35378	3.0	60		140	19	-

Voltage tester 220-250 volts**Slotted transparent, with push-on clip**

2553

Order-No.			mm*		SB	
05271	3.0	60	140	15	-	10
32201	3.0	60	140	15	-	5

PicoFinish® electric fine screwdriver**Slotted**

2270P

Order-No.			mm*		SB	
42374	1.5	50	2	152	18	10
42375	2.0	50	2	152	18	10
42376	2.5	65	2.5	167	18	10
42377	3.0	65	3	167	18	10
42471	3.5	65	3.5	167	18	10

Manufactured acc. to IEC 60900.

Phillips

2271P

Order-No.			mm*		SB	
42379	PH00	50	2	152	18	10
42378	PH0	65	3	167	18	10
42380	PH1	65	4	167	18	10

Manufactured acc. to IEC 60900.

Slotted black, with push-on clip

2557

Order-No.			mm*		SB	
00456	3.0	60	160	17	-	10
31771	3.0	60	160	17	-	1



Screwdriver set SoftFinish®



assorted 12-pcs.

Order-No.

41002

302HK12



1

⊖ 4.0 mm x 100 mm / 3.5 mm x 100 mm /
6.5 mm x 150 mm

⊕ PH1 x 80 mm / PH2 x 100 mm / PH3 x 150 mm

⊗ PZ1 x 80 mm / PZ2 x 100 mm

⊛ T15 x 80 mm / T20 x 100 mm / T25 x 100 mm /
T30 x 115 mm

Slotted, Pozidriv 6-pcs.

302ZK6SO

Order-No.

07153



1

⊖ 3.5 mm x 100 mm / 4.5 mm x 125 mm /
5.5 mm x 150 mm / 6.5 mm x 150 mm

⊗ PZ1 x 80 mm / PZ2 x 100 mm

TORX® MagicSpring® 6-pcs.

362RK6SO

Order-No.

27746



1

⊗ T10 x 80 mm / T15 x 80 mm / T20 x 100 mm /
T25 x 100 mm / T30 x 115 mm / T40 x 130 mm

TORX® 7-pcs.

362K7

Order-No.

01299



1

⊗ T8 x 60 mm / T9 x 60 mm / T10 x 80 mm / T15 x 80 mm /
T20 x 100 mm / T25 x 100 mm / T30 x 115 mm

TORX® 6-pcs.

362K6SO

Order-No.

07155



1

⊗ T10 x 80 mm / T15 x 80 mm / T20 x 100 mm /
T25 x 100 mm / T30 x 115 mm / T40 x 130 mm

Screwdriver set SoftFinish®



Slotted, Phillips 6-pcs.

302HK6SO

Order-No.

07152



1

⊖ 3.5 mm x 100 mm / 4.5 mm x 125 mm /
5.5 mm x 150 mm / 6.5 mm x 150 mm

⊕ PH1 x 80 mm / PH2 x 100 mm

TORX® Tamper Resistant (with hole) 6-pcs.

362TRK6

Order-No.

24506



1

⊗ T10H x 80 mm / T15H x 80 mm / T20H x 100 mm /
T25H x 100 mm / T30H x 115 mm / T40H x 130 mm

Phillips, Pozidriv 6-pcs.

302HK601

Order-No.

26113



1

⊖ 4.0 mm x 100 mm / 5.5 mm x 125 mm /
6.5 mm x 150 mm

⊕ PH1 x 80 mm / PH2 x 100 mm

⊗ PZ2 x 100 mm

INFOBOX: Wiha SoftFinish® screwdriver



The convenient expert for dry applications.

- The SoftFinish handle provides optimal grip for dry applications in trade and industry.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

Screwdriver set SoftFinish®**Phillips, Pozidriv 6-pcs.**

311K6

Order-No.



26146

1

- ⊕ PH1 x 80 mm / PH2 x 100 mm / PH3 x 150 mm
 ⊖ PZ1 x 80 mm / PZ2 x 100 mm / PZ3 x 150 mm

Screwdriver set SoftFinish®**Slotted, Phillips with hexagon head 6-pcs.**

308HK6

Order-No.



21248

1

- ⊖ 3.5 mm x 75 mm / 4.5 mm x 90 mm / 5.5 mm x 100 mm /
 7.0 mm x 125 mm
 ⊕ PH1 x 80 mm / PH2 x 100 mm

Screwdriver set SoftFinish®**Hexagon nut driver 5-pcs.**

341K5

Order-No.



01034

1

- ⊖ 5.5 mm x 125 mm / 7.0 mm x 125 mm /
 8.0 mm x 125 mm / 10.0 mm x 125 mm /
 13.0 mm x 125 mm

Screwdriver set SoftFinish®**Slotted, Phillips hexagonal blade and solid steel cap, 6-pcs.**

530HK6

Order-No.	
21250	1
⊖	3.5 mm x 75 mm / 4.5 mm x 90 mm / 5.5 mm x 100 mm / 6.5 mm x 125 mm
⊕	PH1 x 80 mm / PH2 x 100 mm

Slotted with one-piece hexagonal blade and solid steel cap

530ZK6

Order-No.	
21251	1
⊖	4.5 mm x 90 mm / 3.5 mm x 75 mm / 5.5 mm x 100 mm / 6.5 mm x 125 mm
⊕	PZ1 x 80 mm / PZ2 x 100 mm

**INFOBOX:
Solid steel cap and hexagon head**


- The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws.
- The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss.
- Blade includes a hexagon bolster for using a set of spanners for additional torque.

Fine screwdriver set PicoFinish®**Slotted, Phillips 7-pcs.**

260PK701

Order-No.	
42991	1
⊖	1.5 mm x 40 mm / 2.0 mm x 40 mm / 2.5 mm x 50 mm / 3.0 mm x 50 mm
⊕	PH00 x 40 mm / PH0 x 50 mm / PH1 x 60 mm

Slotted, Phillips, 7 pcs. incl. holder

260PK601

Order-No.	
42990	1
⊖	1.5 mm x 40 mm / 2.0 mm x 40 mm / 2.5 mm x 50 mm / 3.0 mm x 50 mm
⊕	PH00 x 40 mm / PH0 x 50 mm
	holder

TORX® MagicSpring®, 7 pcs. incl. holder

267PRK601

Order-No.	
42998	1
⊕	T6 x 40 mm / T7 x 40 mm / T8 x 40 mm / T9 x 50 mm / T10 x 50 mm / T15 x 60 mm
	holder

TORX®, 7 pcs. incl. holder

267PK601

Order-No.	
42996	1
⊕	T7 x 40 mm / T8 x 40 mm / T9 x 50 mm / T10 x 50 mm / T15 x 60 mm / T20 x 60 mm
	holder

TORX®, 7 pcs. incl. holder

267PK6M01

Order-No.	
42997	1
⊕	T4 x 40 mm / T5 x 40 mm / T6 x 40 mm / T7 x 40 mm / T8 x 40 mm / T9 x 50 mm
	holder

Hexagonal ball end, 7 pcs. incl. holder

264PK601

Order-No.

42993



1

- 0.9 mm x 0,035" x 40 mm
- 1.3 mm x 0,05" x 40 mm / 1.5 mm x 50 mm /
2.0 mm x 50 mm / 2.5 mm x 60 mm / 3.0 mm x 60 mm
holder

Ball end from AF 1.3 upwards

Hex, 7 pcs. incl. holder

263PK601

Order-No.

42992



1

- 0.9 mm x 0,035" x 40 mm
- 1.3 mm x 0,05" x 40 mm / 1.5 mm x 50 mm /
2.0 mm x 5/64" x 50 mm / 2.5 mm x 60 mm /
3.0 mm x 60 mm
holder

Hex nut driver, 7 pcs. incl. holder

265PK601

Order-No.

42994



1

- 2.5 mm x 60 mm / 3.0 mm x 60 mm / 3.5 mm x 60 mm /
4.0 mm x 60 mm / 5.0 mm x 60 mm / 5.5 mm x 60 mm
holder

Fine screwdriver set PicoFinish®**8-pcs. mixed, including tweezers for iPhone®/
Apple® devices**

266PK801

Order-No.

42995



1

- ⊕ PH000 x 40 mm / PH00 x 40 mm
- PL1 x 40 mm / PL2 x 40 mm
- 2.5 mm x 60 mm
- T3 x 40 mm
- Y000 x 40 mm
- 2a, 120 mm

Screwdriver SoftFinish®



With round blade for low-lying screws



With round blade

Slotted with round blade for low-lying screws

302

Order-No.						mm		
00684	2.0	65	0.4	2	169	23	10	
00685	2.5	75	0.4	2.5	179	23	10	
00687	3.0	100	0.5	3	204	23	10	
00689	3.0	150	0.5	3	254	23	10	
00690	3.0	200	0.5	3	304	23	10	
32383	3.0	300	0.5	3	404	23	5	
00686	3.0	80	0.5	3	184	23	10	
00691	3.5	100	0.6	3.5	204	23	10	
26931	3.5	200	0.6	3.5	304	23	10	
00692	4.0	100	0.8	4	211	30	10	
00694	4.0	150	0.8	4	261	30	10	
00695	4.0	200	0.8	4	311	30	10	
00696	4.0	300	0.8	4	411	30	5	
00697	4.5	125	0.8	4.5	236	30	10	
27753	4.5	80	0.8	4.5	191	30	10	
00698	5.5	125	1.0	5.5	236	30	10	
00700	5.5	150	1.0	5.5	261	30	10	
00701	5.5	200	1.0	5.5	311	30	10	
00702	5.5	300	1.0	5.5	411	30	5	
32384	6.0	300	1.0	6	418	36	5	

Slotted with round blade

3022

Order-No.						mm		
27754	6.0	100	1.0	5.5	218	36	10	
27755	6.0	150	1.0	5.5	268	36	10	
00704	6.5	100	1.2	6	218	36	10	
00703	6.5	150	1.2	6	268	36	10	
00706	6.5	200	1.2	6	318	36	10	
00708	8.0	150	1.2	7	274	41	10	
00707	8.0	175	1.2	7	299	41	5	
00709	8.0	175	1.6	7	299	41	5	
32399	8.0	300	1.2	7	424	41	5	
00711	10.0	200	1.6	8	324	41	5	
32400	10.0	300	1.6	8	424	41	5	
00712	12.0	250	2.0	8	374	41	5	
00713	14.0	250	2.5	11	374	41	5	

Phillips with round blade

311

Order-No.					mm			
00754	PH0	60	3		164	23	10	
27756	PH0	100	3		204	23	10	
00756	PH1	80	4.5		191	30	10	
27757	PH1	100	4.5		211	30	10	
00757	PH1	200	4.5		311	30	10	
03738	PH1	300	4.5		411	30	5	
00759	PH2	100	6		218	36	10	
27758	PH2	150	6		268	36	10	
00760	PH2	200	6		318	36	10	
03739	PH2	300	6		418	36	5	
00762	PH3	150	8		274	41	10	
00763	PH4	200	10		324	41	5	



Pozidriv with round blade

313

Order-No.					mm			
00768	PZ0	60	3		164	23	10	
00770	PZ1	80	4.5		191	30	10	
26454	PZ1	300	4.5		411	30	5	
00772	PZ2	100	6		218	36	10	
26455	PZ2	300	6		418	36	5	
00774	PZ3	150	8		274	41	10	

TORX® ball end 6-pcs.

362BE

Order-No.					mm			
32250	T9	60	7/64"	2.8	164	23	10	
32251	T10	60	1/8"	3.2	184	23	10	
32252	T15	80	9/64"	3.6	191	30	10	
32253	T20	80	5/32"	4	211	30	10	
32254	T25	100	3/16"	4.8	218	36	10	
32255	T27	115	7/32"	5.6	233	36	10	
32256	T30	115	1/4"	6.4	233	36	10	

TORX® MagicSpring® with round blade

362R

Order-No.					mm			
27736	T6	60	3.5		164	23	10	
27737	T7	60	3.5		164	23	10	
27738	T8	60	3.5		164	23	10	
27739	T9	60	4		171	30	10	
27740	T10	80	4		191	30	10	
27741	T15	80	4		191	30	10	
27742	T20	100	4		218	36	10	
27743	T25	100	4.5		218	36	10	
27811	T27	115	5.5		233	36	10	
27744	T30	115	6		233	36	10	
27745	T40	130	7		254	41	10	

TORX® with round blade

362

Order-No.				mm		
26259	T3	60	2.5	164	23	10
26260	T4	60	2.5	164	23	10
01285	T5	60	2.5	164	23	10
01286	T6	60	3.5	164	23	10
01287	T7	60	3.5	164	23	10
01288	T8	60	3.5	164	23	10
01289	T9	60	4	171	30	10
01290	T10	80	4	191	30	10
01291	T15	80	4	191	30	10
01292	T20	100	4	218	36	10
01293	T25	100	4.5	218	36	10
01294	T27	115	5.5	233	36	10
01295	T30	115	6	233	36	10
01296	T40	130	7	254	41	10
01297	T45	130	8	254	41	5

TORX® Tamper Resistant (with hole) with round blade

362TR

Order-No.				mm		
03106	T7H	60	164	23	10	
03107	T8H	60	164	23	10	
03108	T9H	60	171	30	10	
26457	T10H	300	411	30	5	
01305	T30H	115	233	36	10	
01304	T27H	115	233	36	10	
01303	T25H	100	211	30	10	
01302	T20H	100	211	30	10	
01301	T15H	80	191	30	10	
01300	T10H	80	191	30	10	
28005	T20H	300	411	30	5	
26458	T15H	300	411	30	5	
01306	T40H	130	254	41	10	

TORX PLUS® MagicSpring® with round blade

362RIP

Order-No.				mm		
28760	6IP	60	3.5	164	23	10
28761	7IP	60	3.5	164	23	10
28762	8IP	60	3.5	164	23	10
28763	9IP	60	4	171	30	10
28764	10IP	80	4	191	30	10
28765	15IP	80	4	191	30	10
28766	20IP	100	4	218	36	10

362IP

Order-No.				mm		
26091	6IP	60	3.5	164	23	10
26093	7IP	60	3.5	164	23	10
26095	8IP	60	3.5	164	23	10
26097	9IP	60	4	171	30	10
26099	10IP	80	4	191	30	10
26101	15IP	80	4	191	30	10
26103	20IP	100	4	218	36	10
26105	25IP	100	4.5	218	36	10
26107	27IP	115	5.5	233	36	10
26109	30IP	115	6	233	36	10
26111	40IP	130	7	254	41	10

MagicRing® hexagonal ball end with hexagonal blade

367R

Order-No.				mm		
26077	3.0	100	204	23	10	
26079	4.0	100	211	30	10	
26081	5.0	100	211	30	10	
26083	6.0	125	243	36	10	
26085	8.0	150	268	36	10	

Hexagonal ball end with hexagonal blade

367

Order-No.				mm		
26303	1.5	75	179	23	10	
26304	2.0	100	204	23	10	
26305	2.5	100	204	23	10	
26328	3.0	100	204	23	10	
26329	4.0	100	211	30	10	
26330	5.0	100	211	30	10	
26331	6.0	125	243	36	10	
26332	8.0	150	268	36	10	
26333	10.0	150	271	41	5	
26307	12.0	150	271	41	5	

Hexagon with hexagonal blade

356

Order-No.				mm		
32264	1.5	60	164	23	10	
32265	2.0	60	164	23	10	
26190	2.5	75	179	23	10	
26191	3.0	75	179	23	10	
26192	4.0	75	186	30	10	
26193	5.0	75	186	30	10	
26194	6.0	100	218	36	10	
26195	8.0	100	218	36	10	

Screwdriver SoftFinish®**Hexagon angled**

357

Order-No.	Ø	L	W	mm	+	Box
26230	3.0	35	20	139	23	10
26231	4.0	40	25	151	30	10
26232	5.0	45	28	156	30	10
26233	6.0	50	32	168	36	10
26234	8.0	60	36	178	36	10

Screwdriver SoftFinish®**Hexagon nut driver with round blade**

341

Order-No.	Ø	L	W	mm	+	Box
01018	4.0	6.9	125	236	30	10
01020	5.0	7.9	125	236	30	10
01021	5.5	7.9	125	236	30	10
01022	6.0	8.9	125	236	30	10
01023	7.0	10.9	125	243	36	10
01024	8.0	11.9	125	243	36	10
01025	9.0	12.9	125	243	36	10
01026	10.0	14.4	125	243	36	10
01027	11.0	15.9	125	249	41	5
01028	12.0	16.9	125	249	41	5
01029	13.0	18.4	125	249	41	5
01030	14.0	19.4	125	249	41	5
01031	15.0	21.9	125	249	41	5
01032	16.0	21.9	125	249	41	5
01033	17.0	23.4	125	249	41	5

Terminal actuation tool SoftFinish®**slotted 3.0 x 0.5 mm**

3023

Order-No.	Ø	L	W	mm	+	Box
43894	3.0	0.5	70	3	174	23

Hexagon nut driver with short round blade

343

Order-No.	Ø	L	W	mm	+	Box
01076	5.5	8	65	176	30	10
01077	6.0	9	65	176	30	10
01078	7.0	11	65	183	36	10
01079	8.0	12	65	183	36	10
01081	10.0	14	65	183	36	10

Screwdriver SoftFinish®



Screwdriver SoftFinish®



Hexagon nut driver, inch design with round blade and hexagon head

347Z

Order-No.					mm		
02836	3/16"	8	125	10	231	30	10
02837	1/4"	10	125	10	238	36	10
02838	5/16"	12	125	10	238	36	10
02839	3/8"	14	125	10	238	36	10
02840	7/16"	16	125	13	246	41	10

Triangular nut driver

344

Order-No.					mm		
26212	M4	6.8	11	125	236	30	10
26213	M5	8.3	13	125	236	30	10
26216	M6	10.05	16	125	236	30	10
26214	M8	12.05	18	125	243	36	10
26217	M10	15.05	22	125	243	36	10

Screwdriver SoftFinish®



Hexagon nut driver with flexible shaft

372

Order-No.					mm		
01435	5.0	8	150	261	30	10	
01436	5.5	8	150	261	30	10	
01437	6.0	9	150	261	30	10	
01438	7.0	11	150	268	36	10	
01439	8.0	12	150	268	36	10	
01440	10.0	14	175	293	41	10	
01443	13.0	19	175	293	41	10	

Hexagon nut driver with round blade and hexagon head

347

Order-No.					mm		
01092	7.0	11	125	10	238	36	10
01093	8.0	12	125	10	238	36	10
01094	9.0	13	125	10	238	36	10
01095	10.0	14.5	125	10	238	36	10
01096	11.0	16	125	13	246	41	10
01097	12.0	17	125	13	246	41	10
01098	13.0	19	125	13	246	41	10

Screwdriver SoftFinish®**Screwdriver SoftFinish®****Slotted with one-piece hexagonal blade and solid steel cap**

530

Order-No.	•	mm	mm	mm	mm	mm	mm
03223	3.5•	75	0.6	4	186	30	10
03224	4.5•	90	0.8	4	201	30	10
03225	5.5•	100	1.0	5	213	36	10
03226	6.5•	125	1.2	6	238	36	10
03228	8.0•	150	1.2	8	271	41	5
03230	10.0•	175	1.6	8	296	41	5
03231	12.0•	200	2.0	10	321	41	5
03232	14.0•	250	2.5	10	371	41	5

• Additional dimension. Non-DIN size.

Phillips with one-piece hexagonal blade and solid steel cap

531

Order-No.	•	mm	mm	mm	mm	mm	mm
03237	PH1	80	5	8	186	30	10
03238	PH2	100	6	10	213	36	10
03239	PH3	150	8	13	268	41	10

Pozidriv with one-piece hexagonal blade and solid steel cap

532

Order-No.	•	mm	mm	mm	mm	mm	mm
03245	PZ1	80	5	8	186	30	10
03246	PZ2	100	6	10	213	36	10
03247	PZ3	150	8	13	268	41	10

Slotted with round blade and laser scale

3021

Order-No.	•	mm	mm	mm	mm	mm	mm
36085	4.0	100	0.8	4	211	30	20 - 90
35397	5.5	125	1.0	5.5	236	30	30 - 110

Phillips with round blade and laser scale

3111

Order-No.	•	mm	mm	mm	mm	mm	mm
36072	PH1	80	4.5	191	30	20 - 70	10
35398	PH2	100	6	218	36	20 - 90	10

Screwdriver SoftFinish®**Slotted with fixing function**

398

Order-No.	•	mm	mm	mm	mm	mm	mm
32867	2.5	75	0.4	186	30	5	
32868	3.0	100	0.5	211	30	5	
32869	4.0	125	0.8	243	36	5	
32870	5.0	150	1.0	268	36	5	
32871	6.0	175	1.2	293	36	5	

Phillips with fixing function

397

Order-No.	•	mm	mm	mm	mm	mm	mm
32406	PH0	100	211	30	5		
32404	PH1	125	236	36	5		
32405	PH2	175	286	36	5		

Screwdriver SoftFinish®**Slotted with short round blade**

302SY

Order-No.	Ø	L	Blade width	Blade thickness	L1	Shaft length	Handle length	Handle material
26964	4.0	25	0.8	4	81	34	10	
26965	5.5	25	1.0	5.5	81	34	10	
26966	6.5	25	1.2	6.5	81	34	10	
26967	8.0	25	1.2	8	81	34	10	



308

**Phillips with short round blade, Stubby**

311SY

Order-No.	Ø	L	Blade width	Blade thickness	L1	Shaft length	Handle length	Handle material
26968	PH1	25	4.5	81	34	10		
26969	PH2	25	6	81	34	10		
26970	PH3	25	8	81	34	10		

Pozidriv with short round blade, Stubby

313SY

Order-No.	Ø	L	Blade width	Blade thickness	L1	Shaft length	Handle length	Handle material
26971	PZ1	25	4.5	81	34	10		
26972	PZ2	25	6	81	34	10		
26973	PZ3	25	8	81	34	10		

Phillips with hexagonal blade and hexagon head

312

Order-No.	Ø	L	Blade width	Blade thickness	L1	Shaft length	Handle length	Handle material
00764	PH1	80	5	8	186	30	10	
00765	PH2	100	6	10	213	36	10	
00766	PH3	150	8	13	268	41	10	
00767	PH4	200	10	16	318	41	5	

Pozidriv with hexagonal blade and hexagon head

314

Order-No.	Ø	L	Blade width	Blade thickness	L1	Shaft length	Handle length	Handle material
00776	PZ1	80	5	8	186	30	10	
00777	PZ2	100	6	10	213	36	10	
00778	PZ3	150	8	13	268	41	10	
00779	PZ4	200	10	16	318	41	5	

**INFOBOX:
Pentalobe****The security profile for Apple devices.**

- Ideal for repairing Apple smartphones, tablets and notebooks.
- Note: The guarantee and warranty conditions of the device manufacturer must be observed.

PicoFinish® fine screwdriver



Slotted

260P

Order-No.	mm	mm*	mm	mm	mm
42381	0.8	40	2	134	9 10
42382	1.0	40	2	134	9 10
42383	1.2	40	2	134	9 10
42384	1.5	40	2	134	9 10
42385	1.5	60	2	154	9 10
42386	1.8	40	2	134	9 10
42387	1.8	60	2	154	9 10
42388	2.0	40	2	140	18 10
42389	2.0	60	2	160	18 10
42390	2.0	100	2	200	18 10
42391	2.5	50	2.5	150	18 10
42392	2.5	75	2.5	175	18 10
42393	2.5	100	2.5	200	18 10
42394	3.0	50	3	150	18 10
42395	3.0	100	3	200	18 10
42397	3.5	60	3.5	160	18 10
42398	4.0	60	4	160	18 10
42399	4.0	100	4	200	18 10

Phillips

261P

Order-No.	mm	mm*	mm	mm	mm
42403	PH000	40	2	134	9 10
42402	PH00	40	2	134	9 10
42413	PH00	60	2	154	9 10
42401	PH0	50	3	150	18 10
42414	PH0	75	3	175	18 10
42415	PH1	60	4	160	18 10
42416	PH1	80	4	180	18 10

Pozidriv

262P

Order-No.	mm	mm*	mm	mm	mm
42418	PZ0	50	3	150	18 10
42419	PZ1	60	4	160	18 10

PHP00 with pivot

2611P

Order-No.	mm	mm*	mm	mm	mm
43882	PHP000	40	2.5	134	9 10

TORX® MagicSpring®

267PR

Order-No.	mm	mm*	mm	mm	mm
42501	T6	40	2.5	140	18 10
42502	T7	40	2.5	140	18 10
42503	T8	40	2.5	140	18 10
42504	T9	50	3	150	18 10
42505	T10	50	3	150	18 10
42506	T15	60	3.5	150	18 10

TORX®

267PR

Order-No.	mm	mm*	mm	mm	mm
42474	T1	40	2.5	134	9 10
42475	T2	40	2.5	134	9 10
42476	T3	40	2.5	134	9 10
42477	T4	40	2.5	134	9 10
42478	T5	40	2.5	134	9 10
42479	T6	40	2.5	140	18 10
42480	T7	40	2.5	140	18 10
42481	T8	40	2.5	140	18 10
42482	T9	50	3	150	18 10
42483	T10	50	3	150	18 10
42484	T15	60	3.5	160	18 10
42485	T20	60	4	160	18 10

Pentalobe

266P

Order-No.	mm	mm*	mm	mm	mm
42464	PL1	40	2.5	134	9 10
42465	PL2	40	2.5	134	9 10
42466	PL3	40	2.5	134	9 10
42467	PL4	40	2.5	134	9 10
42468	PL5	40	2.5	134	9 10
42469	PL6	40	2.5	140	18 10

Y-type

266PY

Order-No.	mm	mm*	mm	mm	mm
42470	Y000	40	2	134	9 10

Ball end hex

264P

Order-No.	mm	mm*	mm	mm	mm
42431	1.3	40	134	9	10
42432	1.5	50	150	18	10
42433	2.0	50	150	18	10
42434	2.5	60	160	18	10
42435	3.0	60	160	18	10

Hex

263P

Order-No.	mm	mm*	mm	mm	mm
42420	0.7	40	134	9	10
42421	0.9	40	134	9	10
42422	1.3	40	134	9	10
42423	1.5	50	144	9	10
42424	2.0	50	150	18	10
42425	2.5	60	160	18	10
42426	3.0	60	160	18	10

Hexagonal ball end, inch design

264PZ

Order-No.	mm	mm*	mm	mm	mm
42436	1/16"	50	150	18	10
42440	5/64"	50	150	18	10
42438	3/32"	50	150	18	10
42441	7/64"	60	160	18	10
42437	1/8"	60	160	18	10
42442	9/64"	60	160	18	10
42439	5/32"	60	160	18	10

PicoFinish® fine screwdriver



Hex

263PZ

Order-No.			mm	+	
42427	1/16"	50	144	9	10
42428	1/8"	60	160	18	10
42429	3/32"	60	160	18	10
42430	7/64"	60	160	18	10

Pocket screwdrivers



Slotted transparent-red, with push-on clip

500

Order-No.			mm	+	
01537	3.0	40	3	100	11 50
01538	3.0	60	3	120	11 50
01539	3.0	80	3	140	11 50

PicoFinish® fine screwdriver



Hex nut driver

265P

Order-No.			mm	+	
42443	1.5	60	160	18	10
42444	1.8	60	160	18	10
42445	2.0	60	160	18	10
42446	2.5	60	160	18	10
42447	3.0	60	160	18	10
42448	3.2	60	160	18	10
42449	3.5	60	160	18	10
42450	4.0	60	160	18	10
42451	4.5	60	160	18	10
42452	5.0	60	160	18	10
42453	5.5	60	160	18	10
42454	6.0	60	160	18	10
42455	7.0	60	160	18	10

Pocket screwdrivers



Slotted transparent-yellow

509

Order-No.			mm	+	
01548	2.0	40	2	85	8 50

Square reamer



with square tip and plastic handle

300

Order-No.			mm	+	
00679	6	100	185	34	10

Lifter PicoFinish



268P

Order-No.			mm	+	
42507	50	3.5	150	18 1	3.5 10

Awl plastic handle



with round tip and plastic handle

301

Order-No.			mm	+	
00683	6	100	185	34	10

Magnetiser**in blister pack**

Order-No.		
01508	-	5
02568	-	5

40010

10-pcs. for universal scraper in blister pack

SB43040K10

Order-No.	
27606	5

**SoftFinish® universal scraper**

40010

Order-No.	
23159	5

SoftFinish® universal scraper set**12-pcs. in blister pack**

SB4304010

Order-No.	
26920	1

SoftFinish® universal scraper 27.5 mm (23159)

Replacement blade set, 13 mm wide 10-pcs. for universal scraper in blister pack (27606)

Screwdriver set MicroFinish®



Slotted, Phillips with one-piece hexagonal blade and solid steel cap, 5-pcs.

5533HK5

Order-No.		
29138	1	
⊖	5.5 mm x 100 mm / 6.5 mm x 125 mm / 8.0 mm x 150 mm	
⊕	PH1 x 80 mm / PH2 x 100 mm	

Screwdriver MicroFinish®



TORX® with round blade

5527

Order-No.	⊖	↔	⊕	mm	⊖	↔
29162	T10	80	4	192	30	10
29163	T15	80	4	192	30	10
29164	T20	100	4	212	30	10
29165	T25	100	4.5	212	30	10

Slotted, Pozidriv with one-piece hexagonal blade and solid steel cap, 5-pcs.

5533ZK5

Order-No.		
29139	1	
⊖	5.5 mm x 100 mm / 6.5 mm x 125 mm / 8.0 mm x 150 mm	
⊕	PZ1 x 80 mm / PZ2 x 100 mm	

Screwdriver MicroFinish®



INFOBOX: Wiha MicroFinish screwdriver



The specialist for wet and oily applications.

- Due to the micro-fine surface structure of the screwdriver handle, the user can gain an optimal hold, even with oily or wet hands.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

Phillips with one-piece hexagonal blade and solid steel cap

5534

Order-No.	⊕	↔	⊖	mm	⊕	↔
29149	PH1	80	5	8	187	30
29150	PH2	100	6	10	214	36
29151	PH3	150	8	13	271	41

Pozidriv with one-piece hexagonal blade and solid steel cap

5535

Order-No.	⊕	↔	⊖	mm	⊕	↔
29158	PZ1	80	5	8	187	30
29159	PZ2	100	6	10	214	36

Screwdriver set SoftFinish® ESD



Screwdriver set SoftFinish® ESD



Slotted, Phillips 5-pcs.

Order-No.

27252

⊖ 3.0 mm x 100 mm / 4.0 mm x 100 mm

⊕ PH0 x 60 mm / PH1 x 80 mm / PH2 x 100 mm

IEC 61340-5-1.

302ESDHK501

1

TORX® 5-pcs.

Order-No.

27253

⊗ T6 x 60 mm / T8 x 60 mm / T9 x 60 mm / T10 x 80 mm /

⊕ T15 x 80 mm


IEC 61340-5-1.

362ESDK5

1



**INFOBOX:
Electrostatic
conductive ESD tools**



Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 - 10^9 ohms.

Screwdriver SoftFinish® ESD**Slotted**

302ESD

Order-No.	mm	mm*	+	mm	mm*	+
08179	2.5	75	0.4	179	23	10
27150	3.0	100	0.5	204	23	10
27151	4.0	100	0.8	211	30	10
08182	5.5	125	1.0	236	30	10
08183	6.5	150	1.2	268	36	10

**Phillips**

311ESD

Order-No.	mm	mm*	+	mm	mm*	+
08184	PH0	60	3	164	23	10
08185	PH1	80	4.5	191	30	10
08186	PH2	100	6	218	36	10

Pozidriv

313ESD

Order-No.	mm	mm*	+	mm	mm*	+
26928	PZ0	60	3	164	23	10
26929	PZ1	80	4.5	191	30	10

TORX®

362ESD

Order-No.	mm	mm*	+	mm	mm*	+
31432	T3	60	2.5	164	23	10
27148	T4	60	2.5	164	23	10
27641	T5	60	3.5	164	23	10
27149	T6	60	3.5	164	23	10
31901	T7	60	3.5	164	23	10
22436	T8	60	3.5	164	23	10
27145	T9	60	4	171	30	10
27144	T10	80	4	191	30	10
27146	T15	80	4	191	30	10
27147	T20	100	4	218	36	10

Slotted, Phillips, 7 pcs. incl. holder

270PK601

Order-No.	mm
43707	1
⊖	1 x 1.5 mm x 40 mm / 1 x 2.0 mm x 40 mm / 1 x 2.5 mm x 50 mm / 1 x 3.0 mm x 50 mm
⊕	1 x PH0 x 50 mm / 1 x PH00 x 40 mm
	1 x holder

TORX®, 7 pcs. incl. holder

277PK601

Order-No.	mm
43708	1
⊗	1 x T5 x 40 mm / 1 x T6 x 40 mm / 1 x T7 x 40 mm / 1 x T8 x 40 mm / 1 x T10 x 50 mm / 1 x T15 x 60 mm
	1 x holder

Fine screwdriver PicoFinish® ESD



Slotted

270P

Order-No.	mm	mm*	mm	mm	mm	mm	
43669	1.5	0.2	40	2	134	9	10
43670	2.0	0.4	40	2	140	18	10
43671	2.5	0.4	50	2.5	150	18	10
43672	3.0	0.5	50	3	150	18	10
43673	3.5	0.6	50	3.5	160	18	10
43674	4.0	0.8	60	4	160	18	10

Phillips

271P

Order-No.	mm	mm*	mm	mm	mm	mm
43675	PH000	40	2	134	9	10
43676	PH00	40	2	134	9	10
43677	PH0	50	3	150	18	10
43678	PH1	60	4	160	18	10

Hex

273P

Order-No.	mm	mm*	mm	mm	mm	mm
43679	0.7	40	2.5	134	9	10
43680	0.9	40	2.5	134	9	10
43681	1.3	40	2.5	134	9	10
43682	1.5	50	2.5	144	9	10
43683	2.0	50	3	150	18	10
43684	2.5	60	3	160	18	10
43685	3.0	60	4	160	18	10

Hex nut driver

275P

Order-No.	mm	mm*	mm	mm	mm	mm
43686	2.5	4	60	160	18	10
43687	3.0	5	60	160	18	10
43688	3.5	6	60	160	18	10
43689	4.0	6	60	160	18	10
43690	5.0	7	60	160	18	10
43691	5.5	8	60	160	18	10

Pentalobe

276P

Order-No.	mm	mm*	mm	mm	mm	mm
43692	PL1	40	2.5	134	9	10

Y-type

276PY

Order-No.	mm	mm*	mm	mm	mm	mm
43693	Y000	40	2	134	9	10

TORX®

277P

Order-No.	mm	mm*	mm	mm	mm	mm
43694	T1	40	2.5	134	9	10
43695	T2	40	2.5	134	9	10
43696	T3	40	2.5	134	9	10
43697	T7	40	2.5	134	9	10
43698	T5	40	2.5	134	9	10
43699	T6	40	2.5	140	18	10
43700	T7	40	2.5	140	18	10
43701	T8	40	2.5	140	18	10
43702	T9	50	3	150	18	10
43703	T10	50	3	150	18	10
43704	T15	60	3.5	150	18	10
43705	T20	60	4	150	18	10

Lifter PicoFinish® ESD



278P

Order-No.	mm	mm*	mm	mm	mm	mm	
43706	50	3.5	150	18	1	3.5	10

Screw extractor set**Screw extractor**

405A

Order-No.		mm		
03847	2.0	85	6	10
03848	2.5	85	6	10
03849	3.0	85	6	10
03850	4.0	85	6	10
03851	5.0	85	6	10
03852	6.0	95	8	10
03853	8.0	95	10	10
03854	10.0	110	12	10

Screw extractor**Hex, 17-pcs. with spiral drill bit incl. box**

40511

Order-No.	
03988	1
●	1 x 2.3 / 1 x 2.8 / 1 x 3.4 / 1 x 4.5 / 1 x 5.7 / 1 x 6.8 / 1 x 9.0 / 1 x 11
●	1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm / 1 x 10.0 mm
	1 x Box



405B

Order-No.		mm	
06725	2.3	53	10
06726	2.8	51	10
06727	3.4	70	10
06728	4.5	80	10
06729	5.7	93	10
06730	6.8	109	10
06731	9.0	117	10
06732	11	142	10





Torque tools

Controlled power for greater security.

The correct torque prevents damage to materials, eliminates the need for retouching and protects against warranty claims. This makes fully certified Wiha torque tools essential for mechanics, electricians and electronics technicians as they combine precision with security: with a release accuracy of $+/-6\%$ for the pre-set scale value, Wiha torque screwdrivers satisfy standard precision requirements.

Torque tools with fixed settings increase process reliability while tools with variable settings are particularly ideal for mobile use. A special interchangeable blade system offers interchangeable blades with different drives. Guaranteed individual item testing using the manufacturer's inspection process and individual item marking with an identification number attest to the high quality and manufacturing standard of the tools.

Application

Torque tools

For applications in electrics

Torque screwdriver set
TorqueVario®-S electric
0,8-5,0 Nm mixed,
variably adjustable
torque limit, 19 pcs. incl.
folding bag
Page 164



Torque screwdriver
TorqueVario®-S electric
variably adjustable
torque limit
Page 166



Torque adapter
easyTorque electric
for slimBits and
slimVario® holder in
blister
Page 167



Torque screwdriver with
T-handle TorqueVario®-S
T electric
5-14 Nm variably
adjustable torque limit
Page 171



For applications in mechanics

Torque screwdriver
iTorque®
with digital scale
Page 172



Torque screwdriver set
TorqueVario®-S
0,8-5,0 Nm mixed, 14
pcs., variably adjustable
torque limit incl. box
Page 173



Torque screwdriver
TorqueVario®-S
variably adjustable
torque limit
Page 174



Torque screwdriver
TorqueFix®
permanently pre-set
torque limit
Page 174



Torque screwdriver with
T-handle set TorqueVario®-S
T 5-14 Nm mixed, 12 pcs.,
variably adjustable torque
limit incl. box
Page 178



Torque screwdriver with
T-handle TorqueVario®-S
T5-14 Nm variably
adjustable torque limit
Page 178



For applications in electronics

Torque screwdriver set
TorqueVario®-S ESD
0,4-1,0 Nm assorted,
variably adjustable
torque limit, 14-pcs. incl.
box
Page 161



Torque screwdriver
TorqueVario®-S ESD
variably adjustable
torque limit
Page 181





0,8-5,0 Nm mixed, variably adjustable torque limit, 19 pcs. incl. folding bag

2872T18

Order-No.

36791

1

- 1 x Torque screwdriver TorqueVario®-S electric variably adjustable torque limit
- 1 x Setting tool for torque screwdriver with long handle
- 1 x Adapter TorqueVario-S electric for slimBits
- 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm
- 1 x PH1 / 1 x PH2
- 1 x PZ1 / 1 x PZ2
- 1 x SL/PZ1 / 1 x SL/PZ2
- 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25
- 1 x Folding bag

DIN EN ISO 6789.

Manufactured acc. to IEC 60900.

INFOBOX: VDE-certified tools



Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.



1000 V
IEC 60900



Nm
± 6 %



SLIM
TECHNOLOGY



DOCTORS
RECOMMEND



2872T13

0,8-5,0 Nm mixed, variably adjustable torque limit, 14 pcs. incl. folding bag

Order-No.

40674

1

- 1 x Torque screwdriver TorqueVario®-S electric variably adjustable torque limit
- 1 x Setting tool for torque screwdriver with long handle
- 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits
- Adapter TorqueVario-S electric for slimBits
- 1 x 2,5 mm / 1 x 3,5 mm / 1 x 5,5 mm
- 1 x PH1 / 1 x PH2
- 1 x PZ1 / 1 x PZ2
- 1 x SL/PZ1 / 1 x SL/PZ2
- 1 x Folding bag

DIN EN ISO 6789.

Manufactured acc. to IEC 60900.



Torque screwdriver set TorqueVario®-S electric



Torque screwdriver TorqueVario®-S electric



0,8-5,0 Nm PlusMinus/Pozidriv variably adjustable torque limit 5-pcs.

XX2872S3

Order-No.



38074

1

- 1 x Torque screwdriver TorqueVario®-S electric variably adjustable torque limit
- 1 x Setting tool for torque screwdriver with long handle
- 1 x Adapter TorqueVario-S electric for slimBits
- ⊗ 1 x SL/PZ1 / 1 x SL/PZ2

DIN EN ISO 6789.

Manufactured acc. to IEC 60900.

variably adjustable torque limit

2872

Order-No.	Nm	± %	Ø	+	-	()
26625	0.5 - 2	6 %	3.8	131	30	1
26626	0.8 - 5	6 %	3.8	138	36	1
26627	2 - 7	6 %	3.8	142	41	1

Manufactured acc. to IEC 60900, DIN EN ISO 6789.

Torque set easyTorque adapter electric



Torque set easyTorque adapter electric



0,8 Nm with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701080S4

Order-No.



41476

5

1 x 0.8 Nm



1 x SL/PZ1 / 1 x SL/PZ2

1 x

Screwdriver with bit holder SoftFinish® slimVario® electric

Manufactured acc. to IEC 60900.

2,0 Nm with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701200S4

Order-No.



41477

5

1 x 2.0 Nm



1 x SL/PZ1 / 1 x SL/PZ2

1 x

Screwdriver with bit holder SoftFinish® slimVario® electric

Manufactured acc. to IEC 60900.

2,0 Nm with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

29701280S4

Order-No.



41478

5

1 x 2.8 Nm



1 x SL/PZ1 / 1 x SL/PZ2

1 x

Screwdriver with bit holder SoftFinish® slimVario® electric

Manufactured acc. to IEC 60900.

for slimBits and slimVario® holder, 5-pcs. in blister pack

29701S5

Order-No.



41479

5

1 x 0.8 Nm / 1 x 2.0 Nm / 1 x 2.5 Nm / 1 x 2.8 Nm / 1 x 4.0 Nm

Manufactured acc. to IEC 60900.

Torque adapter easyTorque electric



for slimBits and slimVario® holder in blister

2970

Order-No.	Nm	%	mm		()
41341	0.8	10 %	59	5.5	5
41342	2.0	10 %	59	5.5	5
41343	2.5	10 %	59	5.5	5
41344	2.8	10 %	59	5.5	5
41345	4.0	10 %	59	5.5	5

Manufactured acc. to IEC 60900.

slimBit electric bit set**slimBit electric bit set**

SLIM TECHNOLOGY

assorted with slimBit holder, 7-pcs.

2879B7

Order-No.



36079

1

- 1 x Adapter TorqueVario-S electric for slimBits
- 1 x 4.0 mm / 1 x 5.5 mm
- 1 x PH1 / 1 x PH2
- 1 x PZ1 / 1 x PZ2

Manufactured acc. to IEC 60900.

Adapter TorqueVario-S electric

28799

for slimBits

Order-No.



35870 6.0 3.8 170 13 10

Manufactured acc. to IEC 60900.

Adapter TorqueVario-S electric

28799

for 1/4" nut driver

Order-No.



43128 1/4" 3.8 178 12 10

Manufactured acc. to IEC 60900.

Slotted, 7-pcs. incl. SlimBit box

SB2831B001

Order-No.



43152

1

- 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.5 mm / 1 x 4.0 mm / 1 x 5.5 mm / 1 x 6.5 mm
- 1 x slimBit box

Tested according to IEC 60900.

TORX®, 7-pcs. incl. SlimBit box

SB2831B501

Order-No.



43153

1

- 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25
- 1 x slimBit box

Tested according to IEC 60900.

TORX®, 7-pcs. incl. SlimBit box

SB2831B502

Order-No.



43154

1

- 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15
- 1 x slimBit box

Tested according to IEC 60900.

TORX PLUS®, 7-pcs. incl. SlimBit box

SB2831B601

Order-No.



43155

1

- 1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x 15IP
- 1 x slimBit box

Tested according to IEC 60900.

Hex, 7-pcs. incl. SlimBit box

SB2831B801

Order-No.

43156



1

- ⊖ 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm

1 x slimBit box

Tested according to IEC 60900.

slimBit electric bit set**Slotted, Pozidriv 7-pcs. incl. SlimBit box**

SB2831B900

Order-No.

43157



1

- ⊖ 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm

⊕ 1 x PZ1 / 1 x PZ2

1 x slimBit box

Tested according to IEC 60900.

**Slotted, PlusMinus/Pozidriv 7-pcs. incl. SlimBit box**

SB2831B901

Order-No.

43158



1

- ⊖ 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm

⊕ 1 x SL/PZ1 / 1 x SL/PZ2

1 x slimBit box

Tested according to IEC 60900.

TORX®, TORX PLUS®, 15-pcs. Incl. slimBit boxes and belt holder

SB2831B950

Order-No.

43161



1

- ⊖ 1 x 6IP / 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x 15IP

⊕ 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15

2 x slimBit box

1 x Belt holster for slimBit box

Tested according to IEC 60900.

Slotted, Phillips 7-pcs. incl. SlimBit box

SB2831B902

Order-No.

43159



1

- ⊖ 1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm / 1 x 6.5 mm

⊕ 1 x PH1 / 1 x PH2

1 x slimBit box

Tested according to IEC 60900.

Slotted, Phillips, Pozidriv 7-pcs. incl. SlimBit box

SB2831B903

Order-No.

43160



1

- ⊖ 1 x 2.0 mm / 1 x 2.5 mm

⊕ 1 x PH0 / 1 x PH1

⊕ 1 x PZ0 / 1 x PZ1

1 x slimBit box

Tested according to IEC 60900.

Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 15-pcs. Incl. slimBit boxes and belt holder

SB2831B951

Order-No.

43162



1

- ⊖ 1 x 3.5 mm / 1 x 5.5 mm

⊕ 1 x PH1 / 1 x PH2

⊕ 1 x PZ1 / 1 x PZ2

⊕ 1 x SL/PZ1 / 1 x SL/PZ2

- ⊖ 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

1 x slimBit box

Tested according to IEC 60900.

slimBit electric bit**Slotted**

283110

Order-No.		mm	inch	mm	inch	Order-No.
43114	1.5•	75	0.4	0.2	5	
43115	2.0•	75	0.4	0.4	5	
34578	2.5•	75	0.4	0.4	5	
34579	3.0•	75	0.5	0.6	5	
41159	3.5	75	0.6	1.4	5	
44385	3.5	75	0.6	1.4	5	
34580	4.0	75	0.8	2.5	5	
34581	5.5	75	1.0	3.8	5	
34582	6.5	75	1.2	5.5	5	

•no slim version

Manufactured acc. to IEC 60900.

Phillips

283111

Order-No.		mm	inch	mm	inch	Order-No.
43116	PH0•	75	0.9	5		
34583	PH1	75	3.8	5		
34584	PH2	75	5.5	5		

•no slim version

Manufactured acc. to IEC 60900.

Pozidriv

283112

Order-No.		mm	inch	mm	inch	Order-No.
43117	PZ0•	75	0.9	5		
34585	PZ1	75	3.8	5		
34586	PZ2	75	5.5	5		

•no slim version

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

283113

Order-No.		mm	inch	mm	inch	Order-No.
34587	SL/PH1	75	3.8	5		
34588	SL/PH2	75	5.5	5		

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

283114

Order-No.		mm	inch	mm	inch	Order-No.
34589	SL/PZ1	75	3.8	5		
34590	SL/PZ2	75	5.5	5		

Manufactured acc. to IEC 60900.

TORX®

283115

Order-No.		mm	inch	mm	inch	Order-No.
43140	T5•	75	0.4	5		
43141	T6•	75	0.6	5		
43142	T7•	75	0.9	5		
35506	T8•	75	1.3	5		
41160	T9•	75	2.5	5		
35507	T10•	75	3.8	5		
35508	T15	75	5.0	5		
35509	T20	75	5.5	5		
36071	T25	75	5.5	5		

•no slim version

Manufactured acc. to IEC 60900.

TORX PLUS®

283116

Order-No.		mm	inch	mm	inch	Order-No.
43143	5IP•	75	0.5	5		
43144	6IP•	75	0.8	5		
43145	7IP•	75	1.3	5		
43146	8IP•	75	2.0	5		
43147	9IP•	75	3.0	5		
43148	10IP•	75	4.5	5		
43149	15IP•	75	5.5	5		
43150	20IP•	75	5.5	5		
43151	25IP•	75	5.5	5		

•no slim version

Manufactured acc. to IEC 60900.

Hex

283118

Order-No.		mm	inch	mm	inch	Order-No.
37222	1.5•	75	0.9	5		
37223	2.0•	75	1.8	5		
37224	2.5•	75	3.8	5		
37147	3.0•	75	5.5	5		
37225	4.0•	75	5.5	5		
37226	5.0•	75	5.5	5		
37227	6.0•	75	5.5	5		

•no slim version

Manufactured acc. to IEC 60900.

Square

283117

Order-No.		mm	inch	mm	inch	Order-No.
35510	#1	75	5.5	5		
35511	#2	75	5.5	5		

Manufactured acc. to IEC 60900.

Torque screwdriver with T-handle TorqueVario®-S T electric



5-14 Nm variably adjustable torque limit

Order-No.	Nm	%				
43177	5 - 14	6 %	6.0	56	120	1

Interchangeable electric blade



TORX® for torque screwdriver with T-handle electric

283795

Order-No.		mm		mm	
38931	T15	136	35	5.5	10
38932	T20	136	35	10.0	10
38933	T25	136	35	15.0	10
38934	T27	136	35	15.0	10
38935	T30	136	35	20.0	10
38936	T40	136	35	20.0	10

Manufactured acc. to IEC 60900.

Interchangeable electric blade



Hex for torque screwdriver with T-handle electric

283793

Order-No.		mm		mm	
38918	3.0	136	35	5.5	10
38919	4.0	136	35	15.0	10
38920	5.0	136	35	20.0	10
38921	6.0	136	35	20.0	10

Manufactured acc. to IEC 60900.

INFOBOX: Torque T-handle TorqueVario®-S T electric



Torque T-handle TorqueVario®-S T electric

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the adjusting tool.
- More fastening power thanks to T-handle design.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Certified individual item testing directly after on-site production.

Interchangeable electric blade



Hex nut driver for torque screwdriver with T-handle electric

283794

Order-No.		mm		mm	
38925	7.0	136	5.0	10	
38926	8.0	136	10.0	10	
38927	9.0	136	14.0	10	
38928	10.0	136	17.0	10	
38929	13.0	136	20.0	10	
38930	17.0	136	20.0	10	

Manufactured acc. to IEC 60900.

Adapter T-handle TorqueVario®-S T electric**for 1/4" nut driver**

Order-No.		mm	
43634	1/4"	88	10

283799

Torque screwdriver iTorque®**Setting tool****for torque screwdriver with T-handle**

Order-No.		mm	
28691	90	146	10

2899

with digital scale

28352

Order-No.	Nm	in lbs	in oz					
36886	0.4 - 1.5	60 - 210	6 %	4.0	134	34	1	
36887	0.8 - 3	7 - 26		6 %	4.0	134	34	1
36888	1 - 5	9 - 44		6 %	4.0	134	40	1

DIN EN ISO 6789.

Torque key, electric**for nut drivers, adjustable torque limit**

2822

Order-No.		Nm	in lbs					
43126	1/4"	5 - 25	44.25 - 221.27	4 %	38	36	288	200
44163	3/8"	5 - 25	44.25 - 221.27	4 %	38	36	290	200

Insulated square adapter**3/8" for 1/4" nut driver**

283799

Order-No.		mm	
44355	1/4"	100	1

**INFOBOX:
iTorque****The intelligent torque tool.**

- Required torque can be adjusted and set on the handle without the need for a separate tool.
- Large numerical display simplifies reading.
- ClickControl records every use and optimises the monitoring of measuring instruments.
- Calibration alarm after 5,000 applications for absolute process safety.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.
- Switchable units (Nm 1 in.lb/ cNm 1 in.oz)
- Can be recalibrated

Torque screwdriver set TorqueVario®-S



0.8–5.0 Nm mixed, 14 pcs., variably adjustable torque limit incl. box

2852S10

Order-No.	
26893	1
<input type="radio"/> 1 x Torque screwdriver TorqueVario®-S variably adjustable torque limit	
<input type="radio"/> 1 x Bit holder clamping with ball for torque screwdriver with long handle	
<input type="radio"/> 1 x Setting tool for torque screwdriver with long handle	
<input type="radio"/> 1 x PH1 / 1 x PH2	
<input type="radio"/> 1 x PZ1 / 1 x PZ2	
<input type="radio"/> 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	
<input type="radio"/> 1 x 3.0 mm / 1 x 4.0 mm	
1 x Box	

DIN EN ISO 6789.

0.8–5.0 Nm TORX®, TORX PLUS®, 14 pcs. variably adjustable torque limit incl. box

2852S1001

Order-No.	
34614	1
<input type="radio"/> 1 x Torque screwdriver TorqueVario®-S variably adjustable torque limit	
<input type="radio"/> 1 x Bit holder clamping with ball for torque screwdriver with long handle	
<input type="radio"/> 1 x Setting tool for torque screwdriver with long handle	
<input type="radio"/> 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 1 x T15	
<input type="radio"/> 1 x 7IP / 1 x 8IP / 1 x 9IP / 1 x 10IP / 1 x 15IP	
1 x Box	

DIN EN ISO 6789.



Torque screwdriver TorqueVario®-S



variably adjustable torque limit

2852

Order-No.	Nm	± %	Ø	↔	÷	■
36849	0.04 - 0.46	10 %	4.0	127	23	1
36850	0.1 - 0.6	6 %	4.0	127	23	1
26888	0.1 - 0.6	10 %	4.0	127	23	1
26461	0.4 - 1	6 %	4.0	127	23	1
26462	0.5 - 2	6 %	4.0	131	30	1
26463	0.8 - 5	6 %	4.0	138	36	1
26464	2 - 7	6 %	4.0	142	41	1

•Precision in range of 0.1-0.46 Nm.
DIN EN ISO 6789.

**INFOBOX:
TorqueVario®-S**



Variably settable torque tools.

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the torque setter adjusting tool.
- Distinctly audible and perceptible click signal when set torque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades and adapter blades.

Torque screwdriver TorqueFix®



permanently pre-set torque limit

2850

Order-No.	Nm	± %	Ø	↔	÷	■
26925	0.4	6 %	4.0	112	23	1
26127	0.5	6 %	4.0	112	23	1
26047	0.6	6 %	4.0	112	23	1
26327	0.8	6 %	4.0	112	23	1
26048	0.9	6 %	4.0	112	23	1
26133	1.1	6 %	4.0	119	30	1
26049	1.2	6 %	4.0	119	30	1
26901	1.5	6 %	4.0	119	30	1
26051	2.0	6 %	4.0	119	30	1
26128	2.5	6 %	4.0	119	36	1
26052	3.0	6 %	4.0	126	36	1
26129	3.8	6 %	4.0	126	36	1
26053	5.0	6 %	4.0	132	41	1
26130	5.5	6 %	4.0	132	41	1
34533	6.0	6 %	4.0	132	41	1
26131	7.2	6 %	4.0	132	41	1

DIN EN ISO 6789.

**INFOBOX:
TorqueFix®**



Permanently pre-set torque tools.

- Distinctly audible and perceptible click signal when set torque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Broad selection of interchangeable blades and adapter blades.

Torque screwdriver set TorqueFix®



Cable key for circular plug connector permanently pre-set torque limit 2-pcs.

2850

Order-No.	Nm	mm	mm	mm	mm	mm	mm
36846	0.4	9	230	78	112	23	1
36847	0.6	13	230	78	112	23	1

DIN EN ISO 6789.

Torque screwdriver easyTorque



permanently pre-set torque limit

2920

Order-No.	Nm	%	mm	mm	mm	mm	mm
36229	0.5	10 %	4.0	130	34	1	
36230	0.6	10 %	4.0	130	34	1	
36240	0.9	10 %	4.0	130	34	1	
36231	1.1	10 %	4.0	130	34	1	
36233	1.2	10 %	4.0	130	34	1	
36234	1.4	10 %	4.0	130	34	1	
36235	2.0	10 %	4.0	130	34	1	
36236	2.5	10 %	4.0	130	34	1	
36237	3.0	10 %	4.0	130	34	1	
36238	3.8	10 %	4.0	130	34	1	
36320	4.0	10 %	4.0	130	34	1	
36321	4.5	10 %	4.0	130	34	1	
36239	5.0	10 %	4.0	130	34	1	

Interchangeable blade



Slotted for torque screwdriver with long handle

28590

Order-No.				mm	→	MAX Nm	
26227	0.3	1.5	4	175	42	0.2	10
26228	0.4	2.0	4	175	42	0.4	10
26151	0.4	2.5	4	175	42	0.4	10
26277	0.5	3.0	4	175	42	0.6	10
26278	0.6	3.5	4	175	42	1.1	10
26279	0.8	4.0	4	175	42	2.5	10

Phillips for torque screwdriver with long handle

28591

Order-No.				mm	→	MAX Nm	
26199	PH000	4		175	42	0.4	10
26196	PH00	4		175	42	0.4	10
26197	PH0	4		175	42	0.9	10
26058	PH1	4		175	42	3.8	10
27079	PH2	4		175	42	5.5	10

Pozidriv for torque screwdriver with long handle

28592

Order-No.				mm	→	MAX Nm	
26198	PZ0	4		175	42	0.9	10
26148	PZ1	4		175	42	3.8	10
26889	PZ2	4		175	42	5.5	10

TORX® MagicSpring® for torque screwdriver with long handle

28595R

Order-No.				mm	→	MAX Nm	
27818	T6	4		175	42	0.6	10
27812	T7	4		175	42	0.9	10
27813	T8	4		175	42	1.3	10
27814	T9	4		175	42	2.5	10
27815	T10	4		175	42	3.8	10
27816	T15	4		175	42	5.5	10
27817	T20	4		175	42	8.0	10
29467	T25	4		175	42	8.0	10

TORX® for torque screwdriver with long handle

28595

Order-No.				mm	→	MAX Nm	
30852	T4	4		175	42	0.3	10
26158	T5	4		175	42	0.4	10
26064	T6	4		175	42	0.6	10
26065	T7	4		175	42	0.9	10
26066	T8	4		175	42	1.3	10
26059	T9	4		175	42	2.5	10
26067	T10	4		175	42	3.8	10
26068	T15	4		175	42	5.5	10
26069	T20	4		175	42	8.0	10
26070	T25	4		175	42	8.0	10

TORX PLUS® MagicSpring® for torque screwdriver with long handle

28596R

Order-No.				mm	→	MAX Nm	
29553	6IP	4		175	42	0.8	10
29554	7IP	4		175	42	1.3	10
29555	8IP	4		175	42	2.0	10
29556	9IP	4		175	42	3.0	10
29557	10IP	4		175	42	4.5	10
29558	15IP	4		175	42	6.6	10
29559	20IP	4		175	42	8.0	10
29560	25IP	4		175	42	8.0	10

TORX PLUS® for torque screwdriver with long handle

28596

Order-No.				mm	→	MAX Nm	
26159	5IP	4		175	42	0.5	10
26071	6IP	4		175	42	0.8	10
26152	7IP	4		175	42	1.3	10
26072	8IP	4		175	42	2.0	10
26154	9IP	4		175	42	3.0	10
26155	10IP	4		175	42	4.5	10
26073	15IP	4		175	42	6.6	10
26156	20IP	4		175	42	8.0	10
26157	25IP	4		175	42	8.0	10

Hexagonal ball end for torque screwdriver with long handle

28597

Order-No.				mm	→	MAX Nm	
26221	1.5			175	42	0.4	10
26222	2.0			175	42	0.9	10
26223	2.5			175	42	2.0	10
26224	3.0			175	42	3.8	10
26225	4.0			175	42	8.0	10

Hexagon for torque screwdriver with long handle

28593

Order-No.				mm	→	MAX Nm	
26544	1.3	4		175	42	0.4	10
26200	1.5	4		175	42	0.9	10
26060	2.0	4		175	42	1.8	10
26061	2.5	4		175	42	3.8	10
26062	3.0	4		175	42	5.5	10
26063	4.0	4		175	42	8.0	10

Cable key for circular plug connector**Hexagon head for torque screwdriver with long handle**

28594

Order-No.				mm	Nm	lb
36414	8	4	78	218	1.0	10
36415	9	4	78	218	1.0	10
36417	13	4	78	218	1.5	10
36418	14	4	78	218	1.5	10
36421	18	4	78	218	1.5	5

Bit holder clamping with ball**for torque screwdriver with long handle**

28599

Order-No.				mm	lb
27526				162	11

Setting tool**Interchangeable blade****internal square for torque screwdriver with long handle**

28599

Order-No.				mm	lb
26229				155	10

for torque screwdriver with long handle

2859

Order-No.		mm	lb
26864		146	1

**INFOBOX:
MagicSpring®****Wiha TORX® MagicSpring®**

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

**INFOBOX:
Ball end hex****Wiha hexagonal ball end**

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

Torque screwdriver with T-handle set TorqueVario®-S T



5–14 Nm mixed, 12 pcs., variably adjustable torque limit incl.box

2893S01

Order-No.



29234

1

- 1 x Torque screwdriver with T-handle TorqueVario®-S T
5-14 Nm variably adjustable torque limit
- 1 x Setting tool for torque screwdriver with T-handle
- 1 x Adapter blade for torque screwdriver with T-handle / 1 x Adapter blade for torque screwdriver with T-handle
- 1 x Bit holder for torque screwdriver with T-handle
- 1 x T25 / 1 x T30 / 1 x T40
- 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm
- 1 x Box

DIN EN ISO 6789.

Torque screwdriver with T-handle TorqueVario®-S T



5-14 Nm variably adjustable torque limit

2893

Order-No. Nm %

29233 5 - 14 6 6.0 56 120 1

DIN EN ISO 6789.

Torque screwdriver with T-handle TorqueFix® T



permanently pre-set torque limit

2891

Order-No. Nm %

29228 6.0 6 6.0 56 120 1

29229 8.0 6 6.0 56 120 1

29230 10.0 6 6.0 56 120 1

29231 12.0 6 6.0 56 120 1

29236 12.5 6 6.0 56 120 1

29232 14.0 6 6.0 56 120 1

DIN EN ISO 6789.

Interchangeable blade**TORX® for torque screwdriver with T-handle**

28995

Order-No.			mm	mm	max Nm	
28734	T15	6	130	53	5.5	10
28735	T20	6	130	53	10.0	10
28736	T25	6	130	53	15.0	10
28737	T27	6	130	53	15.0	10
28738	T30	6	130	53	20.0	10
28739	T40	6	130	53	20.0	10

Adapter blade**for torque screwdriver with T-handle**

28999

Order-No.			mm	mm	max Nm	
28756	1/4"	6	120	53	10	
28757	3/8"	6	120	53	10	

Bit holder**TORX PLUS® for torque screwdriver with T-handle**

28996

Order-No.			mm	mm	max Nm	
28740	15IP	6	130	53	6.6	10
28741	20IP	6	130	53	13.0	10
28742	25IP	6	130	53	15.0	10
28743	27IP	6	130	53	15.0	10
28744	30IP	6	130	53	20.0	10
28745	40IP	6	130	53	20.0	10

Hex for torque screwdriver with T-handle

28993

Order-No.			mm	mm	max Nm	
28746	3.0	6	130	53	5.5	10
28747	4.0	6	130	53	15.0	10
28748	5.0	6	130	53	20.0	10
28749	6.0	6	130	53	20.0	10

Setting tool**for torque screwdriver with T-handle**

2899

Order-No.			mm	
28691	90		146	10



Torque screwdriver with key handle TorqueFix® Key**permanently pre-set torque limit**

28360

Order-No.	Nm	+	%	O	A	—	—	—
38616	0.5	6		4.0	68	50	1	
38617	0.6	6		4.0	68	50	1	
38618	0.9	6		4.0	68	50	1	
38556	1.1	6		4.0	68	50	1	
38800	1.2	6		4.0	68	50	1	
38619	1.4	6		4.0	68	50	1	
38557	2.0	6		4.0	68	50	1	
38620	2.5	6		4.0	68	50	1	
38621	3.0	6		4.0	68	50	1	
38558	3.8	6		4.0	68	50	1	
38622	4.0	6		4.0	68	50	1	

DIN EN ISO 6789.

Interchangeable blade**TORX® for torque screwdriver with key handle**

283695

Order-No.			mm	—	max Nm	—
38806	T6	4	75	20	0.6	10
38807	T7	4	75	20	0.9	10
38808	T8	4	75	20	1.3	10
38809	T9	4	75	20	2.5	10
38810	T10	4	75	20	3.8	10
38811	T15	4	75	20	5.5	10
38812	T20	4	75	20	8.0	10
38813	T25	4	75	20	8.0	10

Interchangeable blade**TORX PLUS® for torque screwdriver with key handle**

283696

Order-No.			mm	—	max Nm	—
38814	6IP	4	75	20	0.8	10
38815	7IP	4	75	20	1.3	10
38816	8IP	4	75	20	2.0	10
38817	9IP	4	75	20	3.0	10
38818	10IP	4	75	20	4.5	10
38819	15IP	4	75	20	6.6	10
38820	20IP	4	75	20	8.0	10
38821	25IP	4	75	20	8.0	10

Hexagon for torque screwdriver with key handle

283693

Order-No.			mm	—	max Nm	—
38801	1.5	4	75	20	0.9	10
38802	2.0	4	75	20	1.8	10
38803	2.5	4	75	20	3.8	10
38804	3.0	4	75	20	5.5	10
38805	4.0	4	75	20	8.0	10

Torque screwdriver set TorqueVario®-S ESD



Torque screwdriver TorqueVario®-S ESD



0,4-1,0 Nm assorted, variably adjustable torque limit, 14-pcs. incl. box

2882S13

Order-No.



43898

1

- 1 x Torque screwdriver TorqueVario®-S ESD variably adjustable torque limit
- 1 x Bit holder clamping with ball for torque screwdriver with long handle
- 1 x Setting tool for torque screwdriver with long handle
- ⊕ 1 x PH0 / 1 x PH1
- ⊗ 1 x PZ0 / 1 x PZ1
- ⊗ 1 x T4 / 1 x T5 / 1 x T6 / 1 x T8
- 1 x Box

DIN EN ISO 6789.
IEC 61340-5-1.

variably adjustable torque limit

2882

Order-No.	Nm	±%	⊖	⊕	↔	÷	Flag
36851	0.04 - 0.46•	10 %	4.0	127	23	1	
26865	0.1 - 0.6•	10 %	4.0	127	23	1	
36852	0.1 - 0.6•	6 %	4.0	127	23	1	
26629	0.4 - 1•	6 %	4.0	127	23	1	
26866	0.5 - 2•	6 %	4.0	131	30	1	
30495	0.8 - 5•	6 %	4.0	138	36	1	

• Precision in range of 0.1-0.46 Nm.
IEC 61340-5-1. DIN EN ISO 6789.

INFOBOX: Electrostatic conductive ESD tools



- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.

Overview of torque tools

Tools	Precision	Setting	Special feature	Nm range	Torque range				
					0,01 Nm	0,1 Nm	1 Nm	10 Nm	20 Nm
iTorque	± 6 %	variable	Digital display Click control Calibration alarm Numeric scale	0,4 – 1,5 0,8 – 3,0 1,0 – 5,0					
TorqueVario®-S	± 10 %	variable	Numeric scale	0,04 – 0,46					
	± 6 %/± 10 %			0,1 – 0,6 0,4 – 1,0 0,5 – 2,0					
	± 6 %			0,8 – 5,0 2,0 – 7,0					
TorqueVario®-S ESD	± 10 %	variable	ESD-compliant Numeric scale	0,04 – 0,46					
	± 6 %/± 10 %			0,1 – 0,6 0,4 – 1,0 0,5 – 2,0					
	± 6 %			0,8 – 5,0					
TorqueFix®	± 6 %	fixed	Permanently preset in factory	16 versions 0,4 – 7,2					
easyTorque	± 10 %	fixed	Permanently preset in factory	13 versions 0,5 – 5,0					
TorqueFix® Key	± 6 %	fixed	Permanently preset in factory	0,5 – 4,0					
easyTorque adapter	± 10 %	fixed	VDE certification Permanently preset in factory	5 versions 0,8 – 4,0					
TorqueVario®-S VDE	± 6 %	variable	VDE certification Numeric scale	0,5 – 2,0					
				0,8 – 5,0					
				2,0 – 7,0					
TorqueVario®-S T electric		variable	VDE certification Numeric scale	5 – 14					
Torque key, electric	± 4 %	variable	VDE certification Numeric scale	5-25					
TorqueVario®-S T	± 6 %	variable	Numeric scale	5,0 – 14					
TorqueFix®-T	± 6 %	fixed	Permanently preset in factory	6 versions 6,0 – 14					

Interchangeable blades


Series 2859



Series 28369



slimBits
Series 2831

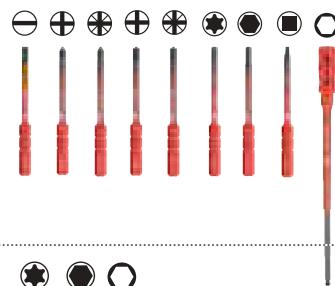

Series 28379



Series 7207 (3/8")
Series 7209 (1/4")



Series 2899





Multitools

Many talents in the minimum space.

Fewer tools mean less load, better handling and efficient work. The more a tool can do, the better: Wiha multitools are compact, versatile tools which save space and reduce overall weight, making them the perfect portable companion.

In the Wiha LiftUp magazine bit holder, the most commonly used bits are neatly stored in the handle, ensuring they are always ready for use and easy to handle. The Wiha reversible blade system offers a variety of interchangeable blades, the lengths of which can be adjusted as required. The small, compact Wiha PocketStars contain the most commonly used L-keys - indispensable helpers for all equipment. The Wiha Stubby magazine combines six drive formats in one, allowing completely unrestricted access to all confined spaces thanks to its extremely short screwdriver handle.

Application

Multitools

All-in-one tools

Screwdriver with bit
magazine LiftUp electric
slotted, Phillips with 6
slimBits in blister pack
Page 186



Screwdriver with bit
magazine LiftUp 26one®
Mixed with 13 double
bits 1/4" in blister pack
Page 187



Screwdriver with bit
magazine Stubby
Mixed with 7 double bits
Page 187



Double bit set
Slotted, 10-pcs. in box
Page 188



Multitool PocketStar
assorted 9-pcs.
Page 190



Multitool PocketStar
TORX® 8-pcs.
Page 190



Multitool PocketStar
Hexagonal ball end
MagicRing® 7-pcs.
Page 192



Switch cabinet key pen
shape
in blister pack
Page 194



Nut driver insert gripper
3/8" in blister pack
Page 194



Interchangeable blade sets

Screwdriver with
interchangeable
blade set SYSTEM 6
Mixed 12-pcs. incl. box
Page 195



Screwdriver with
interchangeable blade
set SYSTEM 4 ESD,
assorted 12-pcs incl.
roll-up bag
Page 202



Screwdriver with
interchangeable blade
set SYSTEM 6 ESD
Mixed 7-pcs. incl. roll-
up bag
Page 197



Screwdriver with
interchangeable blade
set SYSTEM 4
assorted 12-pcs incl.
roll-up bag
Page 200



**Slotted, Phillips with 6 slimBits**

283109020

Order-No.		
38610		5
38612	x	5
⊖	1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.5 mm	
⊕	1 x PH1 / 1 x PH2	

Manufactured acc. to IEC 60900.

TORX® with 6 slimBits

283109022

Order-No.		
41157		5
41158	x	5
⊖	1 x T8 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	

Manufactured acc. to IEC 60900.

Phillips, PlusMinus/Pozidriv, slotted with 6 slimBits

283109021

Order-No.		
38611		5
38613	x	5
⊖	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.5 mm	
⊕	1 x PH1 / 1 x PH2	
✳	1 x SL/PZ2	

Manufactured acc. to IEC 60900.

Pozidriv, PlusMinus/Pozidriv, slotted with 6 slimBits

283109023

Order-No.		
41234		5
41235	x	5
⊖	1 x 2.5 mm / 1 x 3.5 mm / 1 x 5.5 mm	
✳	1 x PZ1 / 1 x PZ2	
✳	1 x SL/PZ2	

Manufactured acc. to IEC 60900.

**INFOBOX:
slimTECHNOLOGY****Wiha SoftFinish® electric slimFix**

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Screwdriver with bit magazine LiftUp 26one®



**Mixed with 13 double bits
1/4" in blister pack**

SB380304021

Order-No.



43895

1

⊖ ⊖ Double bit, slotted/ slotted 1/4" 4.0/6.0 /
Double bit, Slotted/Slotted 5,5/6,5

⊕ ⊕ Double bit, Phillips/Phillips PH0/PH3 /
Double bit, Phillips/Phillips PH1/PH2

⊗ ⊗ Double bit, TORX®/TORX® T6/T8 /
Double bit, TORX®/TORX® T10/T15 /
Double bit, TORX®/TORX® T20/T25 /
Double bit, TORX®/TORX® T27/T30

⊗ ⊗ Double bit, Pozidriv/Pozidriv PZ1/PZ2 /
Double bit, Pozidriv/Pozidriv PZ0/PZ3

□ □ Double bit internal square/internal square #1/#2

● ● Double bit internal hexagon/internal hexagon 3.0/4.0 /
Double bit internal hexagon/internal hexagon 5.0/6.0

Screwdriver with bit magazine Stubby



Mixed with 7 double bits

SB380201

Order-No.



43613

5

⊖ ⊖ Double bit, slotted/ slotted 1/4" 4.0/6.0

⊕ ⊕ Double bit, Phillips/Phillips PH1/PH2


⊗ ⊗ Double bit, Pozidriv/Pozidriv PZ1/PZ2

● ● Double bit internal hexagon/internal hexagon 3.0/4.0

⊗ ⊗ Double bit, TORX®/TORX® T10/T15



**INFOBOX:
LiftUp 26one®**

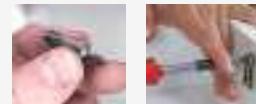

Most of the world's common drives in one tool!

- The LiftUp 26one® has 13 double bits
- The bit magazine opens out at the press of a button, enabling the removal of the bits.
- Unlimited access to low-lying screws thanks to the automatically locking SuperSlim bit holder.
- Powerful screw fastening or loosening thanks to the large screwdriver handle.

Double bit set**Slotted, 10-pcs. in box**

741094060030

Order-No.

43858



1

 Double bit, slotted/ slotted 1/4" 4.0/6.0**Internal hexagon, 10-pcs. in box**

741390506030

Order-No.

43865



1

 Double bit internal hexagon/internal hexagon 5.0/6.0**Slotted, 10-pcs. in box**

741095565030

Order-No.

43859



1

 Double bit, Slotted/Slotted 5,5/6,5**TORX®, 10 pieces in box**

741590608030

Order-No.

43866



1

 Double bit, TORX®/TORX® T6/T8**Phillips, 10-pcs. in box**

741190003030

Order-No.

43860



1

 Double bit, Phillips/Phillips PH0/PH3**TORX®, 10 pieces in box**

741591015030

Order-No.

43867



1

 Double bit, TORX®/TORX® T10/T15**Phillips, 10-pcs. in box**

741190102030

Order-No.

43861



1

 Double bit, Phillips/Phillips PH1/PH2**TORX®, 10 pieces in box**

741592025030

Order-No.

43868



1

 Double bit, TORX®/TORX® T20/T25**Pozidriv, 10-pcs. in box**

741290003030

Order-No.

43862



1

 Double bit, Pozidriv/Pozidriv PZ0/PZ3**TORX®, 10 pieces in box**

741592730030

Order-No.

43869



1

 Double bit, TORX®/TORX® T27/T30**Pozidriv, 10-pcs. in box**

741290102030

Order-No.

43863



1

 Double bit, Pozidriv/Pozidriv PZ1/PZ2**Internal square, 10-pcs. in box**

741990102030

Order-No.

43870



1

 Double bit internal square/internal square #1/#2**Internal hexagon, 10-pcs. in box**

741390304030

Order-No.

43864



1

 Double bit internal hexagon/internal hexagon 3.0/4.0

Screwdriver with LiftUp 25 magnetic bit magazine



Mixed with 12 bits, 1/4"

Order-No.		380302020
38600	5	
38605	x	5
⊖	1 x 4.5 mm / 1 x 6.5 mm	
⊕	1 x PH1 / 1 x PH2 / 1 x PH3	
⊗	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
✿	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30	

Screwdriver with bit magazine magnetic



assorted with 8 bits, 1/4"

Order-No.		38090101
32901	5	
33007	x	5
⊖	1 x 6.5 mm	
⊕	1 x PH1 / 1 x PH2 / 1 x PH3	
⊗	1 x PZ2	
✿	1 x T15 / 1 x T20 / 1 x T25	

Mixed with 12 bits, 1/4"

Order-No.		380302021
38601	5	
38606	x	5
⊖	1 x 5.5 mm	
⊕	1 x PH2	
⊗	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
✿	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30	
●	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm	

TORX® with 8 bits, 1/4"

Order-No.		38090102
32902	5	
33008	x	5
✿	1 x T6 / 1 x T8 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	

Screwdriver with bit magazine magnetic



Slotted, Phillips with 8 bits, 1/4"

Order-No.		380101
33736	10	
33738	x	5
⊖	4.5 mm / 6.5 mm / 8.0 mm	
⊕	PH1 / PH2 / PH3	

TORX® with 6 bits, Stubby, 1/4"

Order-No.		380103
33743	10	
33744	x	5
✿	T10 / T15 / T20 / T25 / T30 / T40	

Phillips, Pozidriv with 6 bits, Stubby, 1/4"

Order-No.		380102
33740	10	
33741	x	5
⊕	PH1 / PH2 / PH3	
⊗	PZ1 / PZ2 / PZ3	

Slotted, Pozidriv with 6 bits, Stubby, 1/4"

Order-No.		380104
33764	10	
33746	x	5
⊖	4.5 mm / 6.5 mm / 8.0 mm	
⊗	PZ1 / PZ2 / PZ3	

Multitool PocketStar**assorted 9-pcs.**

Order-No.	█	351PG9X
25293	5	
25295	x	5
⊖	Slotted Blade 4,5	
⊕	Phillips Blade PH2	
☒	TORX® Blade T10 / TORX® Blade T15 / TORX® Blade T20	
●	hexagon Blade 3 / hexagon Blade 4 / hexagon Blade 5 / hexagon Blade 6	

Multitool PocketStar**TORX® 8-pcs.**

Order-No.	█	363P8
23047	5	
23049	x	5
☒	TORX® Blade T9 / TORX® Blade T10 / TORX® Blade T15 / TORX® Blade T20 / TORX® Blade T25 / TORX® Blade T27 / TORX® Blade T30 / TORX® Blade T40	

Multitool Mini PocketStar**Multitool PocketStar****Slotted, Phillips internal hexagon, 8-pcs. in blister pack**

Order-No.	█	SB351PM8X
27936	5	
●	hexagon Blade 0,7 / hexagon Blade 0,9 / hexagon Blade 1,3 / hexagon Blade 1,5 / hexagon Blade 2	
⊖	Slotted Blade 1,5 / Slotted Blade 2	
⊕	Phillips Blade PH00	

TORX® 7-pcs.

Order-No.	█	363P7
23051	5	
23053	x	5
☒	TORX® Blade T7 / TORX® Blade T8 / TORX® Blade T9 / TORX® Blade T10 / TORX® Blade T15 / TORX® Blade T20 / TORX® Blade T25	

**TORX® Tamper Resistant (with hole) 8-pcs.**

363TRP8

Order-No.		
25130	5	
25166	x	5


⊕ TORX® Tamper Resistant blade T9H /
 TORX® Tamper Resistant blade T10H /
 TORX® Tamper Resistant blade T15H /
 TORX® Tamper Resistant blade T20H /
 TORX® Tamper Resistant blade T25H /
 TORX® Tamper Resistant blade T27H /
 TORX® Tamper Resistant blade T30H /
 TORX® Tamper Resistant blade T40H

TORX® Tamper Resistant (with hole) 7-pcs.

363TRP7

Order-No.		
25128	5	
25164	x	5

⊕ TORX® Tamper Resistant blade T7H /
 TORX® Tamper Resistant blade T8H /
 TORX® Tamper Resistant blade T9H /
 TORX® Tamper Resistant blade T10H /
 TORX® Tamper Resistant blade T15H /
 TORX® Tamper Resistant blade T20H /
 TORX® Tamper Resistant blade T25H

**INFOBOX:
PocketStar**
**The Multitool that fits in your pocket**

- Simple and easy selection of the desired key size at the touch of a button.
- Can be used as a screwdriver long handle and T-handle.
- 270° limit for safe work prevents trapped fingers.
- Covered ends on both pivot axes prevent clothing from being caught.

**INFOBOX:
TORX® tamper-
resistant safety profile**


- This safety profile is used to hinder unwanted access to equipment such as intercoms, thermostats and night-storage heaters.
- You can fasten the Torx® tamper resistant profile with both Torx® H screws and normal Torx® screws.

**Hexagonal ball end MagicRing® 7-pcs.**

369RP7

Order-No.		
23031	5	
23033	x	5

● hexagon Blade 2 / hexagon Blade 3 / hexagon Blade 3 / hexagon Blade 4 / hexagon Blade 5 / hexagon Blade 6 / hexagon Blade 3

Hexagon 7-pcs.

351PG7

Order-No.		
23040	5	
23041	x	5

● hexagon Blade 2 / hexagon Blade 3 / hexagon Blade 3 / hexagon Blade 4 / hexagon Blade 5 / hexagon Blade 6 / hexagon Blade 3

**INFOBOX:
MagicRing®****Wiha MagicRing®**

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

**INFOBOX:
Ball end hex****Wiha hexagonal ball end**

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.



Multitool PocketStar



Hexagon 7-pcs.

351PK7

Order-No.	█	█
23035		5
23037	x	5
●	hexagon Blade 1,5 / hexagon Blade 2 / hexagon Blade 3 / hexagon Blade 3 / hexagon Blade 4 / hexagon Blade 5 / hexagon Blade 6	



Switch cabinet key pen shape**in blister pack**

Order-No.
39076 5 - 8 9 3 7.0 PH2 1

24681

Nut driver insert gripper**Hexagon with ratchet 3/8" and adapter for screwdriver in blister pack 3-pcs.**

SB24602

Order-No.
20783 1

Switch cabinet key cross shape

24667

Order-No.
36114 5 - 8 9 3 - 5 7.0 PH2 5

Nut driver insert gripper**3/8" in blister pack**

24601

Order-No.
20554 7 - 19 3/8" 25.4 53.5 - 1

Universal key with double joint**with triangular heads, square heads and double bit**

24682

Order-No.
44001 7-9 3 - 5 5 - 8 1

Screwdriver with interchangeable blade set SYSTEM 6**Mixed 12-pcs. incl. box**

281B11

Order-No.



00623

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
- 4.0 mm, 6 mm, 150 mm / 5.5 mm, 6.5 mm, 150 mm
- PH1, PH2, 150 mm
- PZ1, PZ2, 150 mm
- T10, T15, 150 mm / T20, T25, 150 mm / T30, T40, 150 mm
- 4.0 mm, 4 mm, 150 mm / 5.0 mm, 5 mm, 150 mm / 6.0 mm, 6 mm, 150 mm

Box

With ball end

assorted 12-pcs. incl. roll-up bag

281T11

Order-No.



03591

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
- 4.0 mm, 6 mm, 150 mm / 5.5 mm, 6.5 mm, 150 mm
- PH1, PH2, 150 mm
- PZ1, PZ2, 150 mm
- T10, T15, 150 mm / T20, T25, 150 mm / T30, T40, 150 mm
- 4.0 mm, 4 mm, 150 mm / 5.0 mm, 5 mm, 150 mm / 6.0 mm, 6 mm, 150 mm

roll-up bag

With ball end

**INFOBOX:
SYSTEM 6****Screwdriver with interchangeable blades**

- Flexible, versatile interchangeable blade system in industrial quality.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Desired blade length can be set (42 – 114 mm)
- Release sleeve: Blade is held in place



Screwdriver with interchangeable blade set SYSTEM 6**Screwdriver with interchangeable blade set SYSTEM 6****assorted 7-pcs. incl. roll-up bag**

281T601

Order-No.



32298

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
- 4.0 mm, 6 mm, 150 mm
- PH1, PH2, 150 mm
- PZ1, PZ2, 150 mm
- T10, T15, 150 mm / T20, T25, 150 mm
- roll-up bag

Hexagon nut driver 13-pcs. incl. roll-up bag

U106T12

Order-No.



27713

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
- 150 mm, 4.0 mm / 150 mm, 4.5 mm / 150 mm, 5.0 mm / 150 mm, 5.5 mm / 150 mm, 6.0 mm / 150 mm, 7.0 mm / 150 mm, 9.0 mm / 150 mm, 8.0 mm / 150 mm, 10.0 mm / 150 mm, 11.0 mm / 150 mm, 13.0 mm
- roll-up bag

Screwdriver with interchangeable blade set SYSTEM 6



Screwdriver with interchangeable blade set SYSTEM 6 ESD



Hexagon nut driver 9-pcs. incl. roll-up bag

U106TB

Order-No.



27712

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade
 - 150 mm, 5.0 mm / 150 mm, 5.5 mm / 150 mm, 6.0 mm / 150 mm, 7.0 mm / 150 mm, 8.0 mm / 150 mm, 10.0 mm / 150 mm, 13.0 mm
- roll-up bag

With ball end

Mixed 7-pcs. incl. roll-up bag

284ESDT601

Order-No.



31497

1

- Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 6 interchangeable blade
 - 3.5 mm, 4.5 mm, 150 mm / 4.0 mm, 6 mm, 150 mm / 5.5 mm, 6.5 mm, 150 mm
- $\ominus \ominus$ PH1, PH2, 150 mm
- $\oplus \oplus$ 5.0 mm, 5 mm, 150 mm
- roll-up bag



**INFOBOX:
Electrostatic
conductive ESD tools**



- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.

Screwdriver handle SoftFinish®-telescopic



for SYSTEM 6 interchangeable blade

Order-No.	Ø	■	■	■	■	■	■
30372	6.0	120	36	-	5		

284

Interchangeable blade SYSTEM 6



Slotted

28400

Order-No.	■	■	■	■	■	mm*	■	■
27627	3.5	4.5	0.6	0.8	150	6	5	
00629	4.0	6	0.8	1	150	6	5	
00630	5.5	6.5	1.0	1.2	150	6	5	

Slotted, Phillips

28401

Order-No.	■	■	■	■	mm*	■	■	■
00665	4.0	PH1	0.8	150	6	5		
00666	6.0	PH2	1.0	150	6	5		

Screwdriver handle SoftFinish®-telescopic ESD



for SYSTEM 6 interchangeable blade

Order-No.	Ø	■	■	■	■	■	■
31496	6.0	120	36	-	5		

284ESD

Pozidriv

28422

Order-No.	■	■	■	mm*	■	■	■
00632	PZ1	PZ2	150	6	5		
27629	PZ2	PZ3	150	6	5		

TORX®

28455

Order-No.	■	■	■	mm*	■	■	■
00654	T6	T8	150	6	5		
00655	T7	T9	150	6	5		
00656	T10	T15	150	6	5		
00657	T20	T25	150	6	5		
00658	T30	T40	150	6	5		

TORX® Tamper Resistant (with hole)

284TR

Order-No.	■	■	■	mm*	■	■	■
27630	T6H	T8H	150	6	5		
27631	T7H	T9H	150	6	5		
27632	T10H	T15H	150	6	5		
27633	T20H	T25H	150	6	5		
27634	T30H	T40H	150	6	5		

Ball end hex

28437

Order-No.	■	■	■	mm*	■	■	■
00635	2.5	2.5	150	6	5		
00636	3.0	3	150	6	5		
00637	4.0	4	150	6	5		
00638	5.0	5	150	6	5		
00639	6.0	6	150	6	5		

Interchangeable blade SYSTEM 6**Hex nut driver**

2844

Order-No.		mm	in		
08900	4.0	150	6	1	
08901	4.5	150	6	1	
08902	5.0	150	6	1	
08903	5.5	150	6	1	
08904	6.0	150	6	1	
08905	7.0	150	6	1	
08906	8.0	150	6	1	
08907	9.0	150	6	1	
08908	10.0	150	6	1	
08909	11.0	150	6	1	
08911	13.0	150	6	1	

Bit holder SYSTEM 6 clamping with ball

7802

Order-No.		mm	in		
03882	1/4"	150	6	10	5

Interchangeable blade SYSTEM 6**1/4" square adapter for nut driver inserts**

7803

Order-No.		mm	in	
03883	1/4"	150	6	5



Screwdriver with interchangeable blade set SYSTEM 4**assorted 12-pcs incl. roll-up bag**

269T11

Order-No.



00610

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
- 1.5 mm, 3 mm, 120 mm / 2.0 mm, 3.5 mm, 120 mm / 2.5 mm, 4 mm, 120 mm
- PH000, PH00, 120 mm / PH0, PH1, 120 mm
- 1.3 mm, 1.3 mm, 120 mm / 1.5 mm, 1.5 mm, 120 mm / 2.0 mm, 2 mm, 120 mm / 2.5 mm, 2.5 mm, 120 mm / 3.0 mm, 3 mm, 120 mm
- roll-up bag

With ball end

assorted 12-pcs incl. roll-up bag

269T1101

Order-No.



27820

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
- 1.5 mm, 3 mm, 120 mm / 2.0 mm, 3.5 mm, 120 mm / 2.5 mm, 4 mm, 120 mm
- PH000, PH00, 120 mm / PH0, PH1, 120 mm
- T6, T8, 120 mm / T7, T9, 120 mm
- 1.5 mm, 1.5 mm, 120 mm / 2.0 mm, 2 mm, 120 mm / 2.5 mm, 2.5 mm, 120 mm
- roll-up bag

Screwdriver with interchangeable blade set SYSTEM 4**Slotted, Phillips, hexagon head, 5-pcs. incl. roll-up bag**

269T4

Order-No.



00613

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
- 2.0 mm, PH00, 120 mm / 3.0 mm, PH0, 120 mm / 4.0 mm, PH1, 120 mm
- roll-up bag

Slotted, Phillips, hex, 7-pcs. incl. roll-up bag

269T6

Order-No.



00616

1

- Screwdriver handle SoftFinish®-telescopic for SYSTEM 4 interchangeable blade
- 1.5 mm, 3 mm, 120 mm / 2.0 mm, 3.5 mm, 120 mm / 2.5 mm, 4 mm, 120 mm
- PH000, PH00, 120 mm / PH0, PH1, 120 mm
- roll-up bag

Bit set SYSTEM 4 ESD**Mixed 27-pcs. incl. box**

7000EB26ESD

Order-No.	
33848	1
○	1 x Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade
○	1 x Bit holder SYSTEM 4 clamping with ball Suitable for C 4 (4 mm) bits.
⊖	1 x 1.5 mm / 1 x 2.0 mm / 1 x 3.0 mm / 1 x 4.0 mm
⊕	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
	1 x 0.7 mm / 1 x 0.9 mm / 1 x 1.3 mm 0,05 / 1 x 1.5 mm
●	/ 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 4.0 mm 5/32"
⊗	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10
	1 x Box

IEC 61340-5-1.
DIN 3126, ISO 1173, style C 4.

Bit set SYSTEM 4 ESD**Mixed 17-pcs. incl. box**

7000EB16ESD

Order-No.	
33503	1
○	1 x Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade
○	1 x Bit holder SYSTEM 4 clamping with ball Suitable for C 4 (4 mm) bits.
⊖	1 x 2.0 mm / 1 x 3.0 mm
⊕	1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
⊗	1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T8
●	1 x 0.9 mm / 1 x 1.3 mm 0,05 / 1 x 1.5 mm
	1 x Box

IEC 61340-5-1.
DIN 3126, ISO 1173, style C 4.

**INFOBOX:
SYSTEM 4****Screwdriver with interchangeable blades**

- Flexible, versatile precision interchangeable blade system for delicate fastening tasks.
- Suitable for all applications: the blades can be quickly combined, extended and exchanged.
- Press sleeve: Blade lock is released
- Press and hold sleeve: Desired blade length can be set (18 – 90 mm)
- Release sleeve: Blade is held in place

Screwdriver with interchangeable blade set SYSTEM 4 ESD**Screwdriver handle SoftFinish®-telescopic****for SYSTEM 4 interchangeable blade**

269

Order-No.				
30373	4.0	105	23	10

**assorted 12-pcs incl. roll-up bag**

2691T11ESD

Order-No.



31499

1

- Screwdriver handle SoftFinish®-telescopic ESD for SYSTEM 4 interchangeable blade
- 1.5 mm, 3 mm, 120 mm / 2.0 mm, 3.5 mm, 120 mm / 2.5 mm, 4 mm, 120 mm
- PH000, PH00, 120 mm / PH0, PH1, 120 mm
- T6, T8, 120 mm / T7, T9, 120 mm
- 1.5 mm, 1.5 mm, 120 mm / 2.0 mm, 2 mm, 120 mm / 2.5 mm, 2.5 mm, 120 mm
- roll-up bag

**for SYSTEM 4 interchangeable blade**

269ESD

Order-No.				
31498	4.0	105	23	10

Interchangeable blade SYSTEM 4**Slotted**

26900

Order-No.	mm	mm	mm	mm	mm	mm
00576	1.5	3	0.3	0.5	120	4
00577	2.0	3.5	0.4	0.6	120	4
00578	2.5	4	0.4	0.8	120	4

Slotted/ Phillips

26901

Order-No.	mm	mm	mm	mm	mm	mm
00601	2.0	PH00	0.4	120	4	5
00602	3.0	PH0	0.5	120	4	5
00603	4.0	PH1	0.8	120	4	5

Phillips

26911

Order-No.	mm	mm	mm	mm	mm	mm
00579	PH000	PH00	120	4	5	
00580	PH0	PH1	120	4	5	

Pozidriv

26922

Order-No.	mm	mm	mm	mm	mm	mm
03186	PZ0	PZ1	120	4	5	

TORX®

26955

Order-No.	mm	mm	mm	mm	mm	mm
26122	T1	T2	120	4	5	
26123	T3	T4	120	4	5	
26124	T5	T6	120	4	5	
00597	T6	T8	120	4	5	
00598	T7	T9	120	4	5	
00599	T10	T15	120	4	5	
00600	T15	T20	120	4	5	

Ball end hex

26937

Order-No.	mm	mm	mm	mm	mm	mm
00582	1.3•	1.3	120	4	5	
00583	1.5•	1.5	120	4	5	
00584	2.0•	2	120	4	5	
00585	2.5•	2.5	120	4	5	
00586	3.0•	3	120	4	5	
00587	4.0•	4	120	4	5	

•With ball end

Bit holder SYSTEM 4 clamping with ball**Suitable for C 4 (4 mm) bits.**

269SE

Order-No.	mm	mm	mm	mm
09195	4.0	4	9	1





L-keys

Difficult to access - easily solved.

Wiha L-keys are essential for all users who are faced with a screw fastening task in difficult work conditions. For difficult-to-access screws Wiha L-keys with a shortened L-key arm prove themselves to be ideal. The risk of injury is significantly reduced as the hand-working space is increased by over 30%.


Wiha ball-end tools enable fastening at angles of up to 25° per side. The risk of an accident is reduced since the tool does not slip out of the screw. Screws made of steel and non-magnetic materials are securely held in any position with the Wiha MagicRing and MagicSpring.

Application

L-keys

L-key holders

L-key set in ErgoStar holder
hexagonal ball
Magicring® 10-pcs. in florescent colour
Page 206



L-key set in ErgoStar holder
Hexagonal ball end
MagicRing® matt chrome-plated 10-pcs.
Page 207



L-key set in ProStar holder
Matt chrome-plated hexagonal ball end with short shaft, 10-pcs.
Page 208



L-key set in ProStar holder
Hexagonal ball end matt chrome-plated 10-pcs.
Page 208



L-key set in Compact holder
Hexagonal ball end, 10-pcs., short, matt chrome-plated
Page 209



L-key set in ErgoStar holder
TORX® MagicSpring®, 14-pcs., black oxidised
Page 211



L-key set in ProStar holder
TORX® titanium silver 14-pcs.
Page 213



L-key set in ProStar holder
TORX®, 14-pcs., black oxidised
Page 214



L-key set in Classic holder
TORX®, 9-pcs., short, black oxidised
Page 214



L-key with T-handle ComfortGrip
Hexagon MagicRing® with side drive, matt chrome-plated
Page 216



L-key with key handle TORX®, black oxidised
Page 217



L-key with flag handle TORX®, black oxidised
Page 217



L-key set in ErgoStar holder



L-key set in ErgoStar holder



hexagonal ball Magicring® 10-pcs. in fluorescent colour

369RE9F

Order-No.		
41979		5
43850	x	5

1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm

ErgoStar holder

hexagonal ball end, 10-pcs. in fluorescent colour


369E9F

Order-No.		
41483		5
43849	x	5

1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm


ErgoStar holder

**INFOBOX:
Tools in fluorescent colour**



- Coloured bits and ErgoStar with coloured L-keys light up under a UV light.
- Ensuring misplaced tools are quickly and easily found again.
- The Wiha flashlight with a UV light makes the perfect complement to coloured fluorescent tools.

**INFOBOX:
ErgoStar**



The right L-key after just one turn.

- One turn of any L-key and all L-keys are ready for removal.
- Solid stopping point for fixing L-keys in the holder.
- Innovative clamping ensures L-keys are held firmly in both a closed and open position.
- Compact design saves space on the work bench or in the toolbox.
- Wall bracket for practical storage of the ErgoStar holder in the workshop.

L-key set in ErgoStar holder



L-key set in ErgoStar holder



Hexagonal ball end MagicRing® matt chrome-plated 10-pcs.

369RH9

Order-No.



37351

5

43850

x

1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm /
6.0 mm / 8.0 mm / 10.0 mm

ErgoStar holder

Based on ISO 2936L.

Hexagonal ball end MagicRing® matt chrome-plated, inch design 14-pcs.

369RHZ13

Order-No.



36521

5

43852

x

1.3 mm 0,05" / 1.6 mm 1/16" / 2.0 mm 5/64" / 2.4 mm
3/32" / 2.8 mm 7/64"

3.2 mm 1/8" / 3.6 mm 9/64" / 4.0 mm 5/32" / 4.8 mm
3/16" / 5.6 mm 7/32" / 6.4 mm 1/4" / 7.9 mm 5/16" /
9.5 mm 3/8"

ErgoStar holder

Based on ASME B18.3.

**INFOBOX:
MagicRing®**



Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.




**INFOBOX:
Ball end hex**



Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.



L-key set in ProStar holder



Matt chrome-plated hexagonal ball end with short shaft, 10-pcs.

369TS9

Order-No.	
35480	5
35481	5
● 1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm ProStar holder	

Based on ISO 2936L.

L-key set in ProStar holder



Hexagonal ball end in inch design, 14-pcs., black oxidised

369SZ13B

Order-No.	
24189	5
24851	5
● 1.3 mm 0,05" / 1.6 mm 1/16" / 2.0 mm 5/64" / 2.4 mm 3/32" / 2.8 mm 7/64" / 3.2 mm 1/8" / 3.6 mm 9/64" / 4.0 mm 5/32" / 4.8 mm 3/16" / 5.6 mm 7/32" / 6.4 mm 1/4" / 7.9 mm 5/16" / 9.5 mm 3/8" / 1.3 mm ProStar holder	

Based on ASME B18.3.

INFOBOX: **L-key with short shaft**



Especially for hard-to-reach screws and confined spaces

- Improved accessibility thanks to a 60% reduction in length of the short L-key side.
- Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key.
- Ball end geometry enables fastening at an angle of up to 25°.

Hexagonal ball end matt chrome-plated 10-pcs.

369S9

Order-No.	
07185	5
07192	5
● 1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm ProStar holder	

Based on ISO 2936L.

L-key set in Compact holder**Hexagonal ball end matt chrome-plated 12-pcs.**

369H11

Order-No.



36453

5

1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 7.0 mm / 8.0 mm / 9.0 mm / 10.0 mm

Compact holder

Based on ISO 2936L.

L-key set in Compact holder**Hexagonal ball end, 10-pcs., short, matt chrome-plated**

369KH9

Order-No.



40410

10

40411

x

1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm

Compact holder

Based on ISO 2936L.

L-key set in Compact holder**Hexagonal ball end matt chrome-plated 10-pcs.**

369H9

Order-No.



01418



5

02292


x

5

1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm

Compact holder

Based on ISO 2936L.

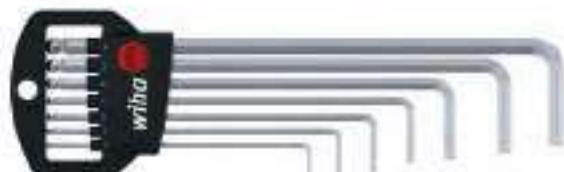L-key set in Classic holder**Hexagonal ball end matt chrome-plated 8-pcs.**

369H7

Order-No.



01416

5


03723

x

1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm

Classic holder


Based on ISO 2936L.

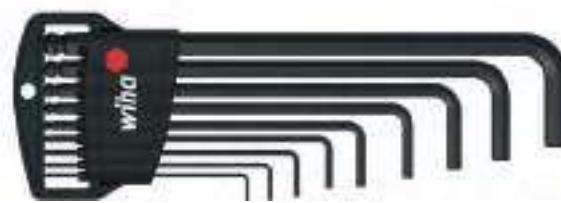L-key set in Classic holder**Hexagonal ball end, 10-pcs., black oxidised**

369HB

Order-No.	
03879	5
03992	x 10
●	1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm
	Classic holder


Based on ISO 2936L.

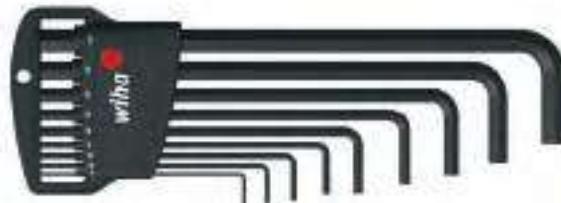L-key set in Classic holder**Hex, 10-pcs., black oxidised**

352HB

Order-No.	
06386	5
●	1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm
	Classic holder

Based on ISO 2936L.

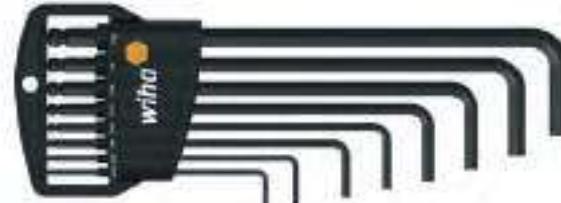L-key set in Classic holder**Hexagonal ball end, 9-pcs. in inch design, black oxidised**

369HZ8

Order-No.	
01420	5
02939	x 10
●	2.0 mm 5/64" / 2.4 mm 3/32" / 3.2 mm 1/8" / 4.0 mm 5/32" / 4.8 mm 3/16" / 5.6 mm 7/32" / 6.4 mm 1/4" / 7.9 mm 5/16"
	Classic holder

Based on ASME B18.3.

L-key set in Classic holder**Hex, 10-pcs., black oxidised**

350H9

Order-No.	
06379	10
●	1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm
	Classic holder

ISO 2936K.

L-key set in Classic holder**Hex, 8-pcs., black oxidised**

350H7


Order-No.		
06378		10
●	1.5 mm / 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm	
●	Classic holder	

ISO 2936K.

L-key set in ErgoStar holder**TORX® MagicSpring®, 14-pcs., black oxidised**

366RHZ13

Order-No.		
36503		5
43848	x	5
●	T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45	
●	ErgoStar holder	

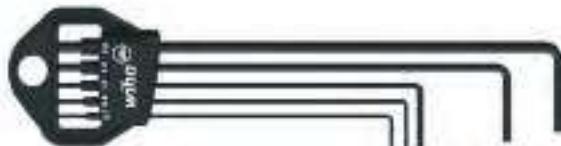L-key set in Classic holder**Hex, 6-pcs., black oxidised**

352HM5B

Order-No.		
06382		10
●	0.7 mm / 0.9 mm / 1.3 mm / 1.5 mm / 2.0 mm	
●	Classic holder	

Based on ISO 2936L.

**INFOBOX:
MagicSpring®****Wiha TORX® MagicSpring®**

- TORX® and TORX PLUS® screws are held securely in place.
- An innovation, which will benefit each user.

L-key set in Classic holder**TORX® MagicSpring®, 9-pcs., black oxidised**

366RH8


Order-No.	
34740	5
• T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40	
Classic holder	

L-key set in ErgoStar holder**TORX® ball end, 14-pcs., black oxidised**

366BEHZ13

Order-No.	
36487	5
43847	x
• T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45	
ErgoStar holder	

TORX® ball end starting from size T9

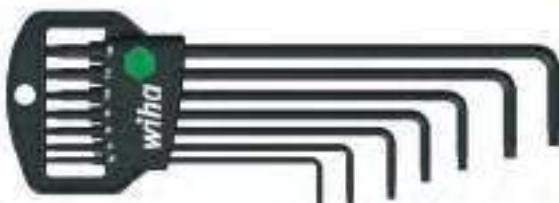L-key set in Classic holder**TORX® MagicSpring®, 8-pcs., black oxidised**


366RHM7

Order-No.	
33753	5
33754	x
• T6 / T7 / T8 / T9 / T10 / T15 / T20	

Classic holder

**INFOBOX:
TORX® ball end****Wiha TORX® ball end**

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.

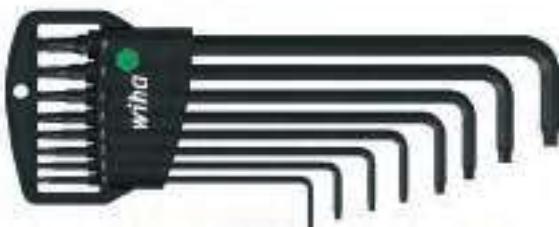L-key set in Classic holder**TORX® ball end, 9-pcs., black oxidised**

366BEH8

Order-No.		
32394	5	
32395	x	10
•	T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40	

Classic holder

L-key set in ProStar holder**TORX® titanium silver 14-pcs.**

366SZ13TS

Order-No.		
39104	5	
39105	x	5
•	T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45	

ProStar holder

L-key set in ProStar holder**Stubby TORX® ball end, 14-pcs. in titanium silver**

366BETSZ13TS

Order-No.		
40979	5	
•	T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45	
•	ProStar holder	

TORX® ball end starting from size T9

**INFOBOX:
L-key with short shaft****Especially for hard-to-reach screws and confined spaces**

- Improved accessibility thanks to a 60% reduction in length of the short L-key side.
- Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key.
- Ball end geometry enables fastening at an angle of up to 25°.

L-key set in ProStar holder**TORX®, 14-pcs., black oxidised**

366SZ13


Order-No.		
24312		5
24852	x	5
•	T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T50	
	ProStar holder	

L-key set in Classic holder**TORX®, 9-pcs., short, black oxidised**

363H8

Order-No.		
36461		5
•	T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40	

Classic holder

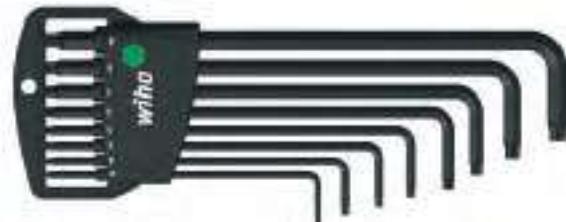L-key set in Classic holder**TORX®, 9-pcs., black oxidised**

366H8

Order-No.		
34736		5
•	T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40	

Classic holder

Short TORX® incl. work bench stand, 10-pcs., black oxidised

363VB

Order-No.		
01326		1
•	T10 / T15 / T20 / T25 / T30 / T40 / T50 / T55 / T60	

Workbench stand

L-key set in Classic holder



TORX PLUS®, 9-pcs. in black oxidised

361IPH8

Order-No.		
36459		5
	9IP / 10IP / 15IP / 20IP / 25IP / 27IP / 30IP / 40IP	
	Classic holder	

L-key set in Classic holder



TORX® Tamper Resistant (with hole), 9-pcs., black oxidised

363TRH8

Order-No.		
36462		5
	T9H / T10H / T15H / T20H / T25H / T27H / T30H / T40H	
	Classic holder	

L-key with T-handle set ComfortGrip**Hexagon with side drive, matt chrome-plated
6-pcs.**

334DSK6

Order-No.

26247

1

● 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm

L-key with T-handle set ComfortGrip**TORX® with side drive, matt chrome-plated
6-pcs.**

364DSK6

Order-No.

26248

1

● T10 / T15 / T20 / T25 / T30 / T40

L-key with T-handle set**Hexagon MagicRing® brilliant nickel-plated in
work bench stand 6-pcs.**

334RVB

Order-No.

22096

1

● 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm / 8.0 mm / 10.0 mm

L-key with T-handle set**Hex incl. work bench stand, 8-pcs., brilliant
nickel-plated**

334VB

Order-No.

00953

1

● 2.0 mm / 2.5 mm / 3.0 mm / 4.0 mm / 5.0 mm / 6.0 mm /
8.0 mm

Workbench stand

L-key with T-handle set**Short TORX® incl. work bench stand, 8-pcs., matt chrome-plated**

364VB

Order-No.



01348

1

● T10 / T15 / T20 / T25 / T30 / T40 / T50

Workbench stand

L-key with key handle set**TORX PLUS® incl. work bench stand, 8-pcs., black oxidised**

365IPVB

Order-No.



26261

1

● 6IP / 7IP / 8IP / 9IP / 10IP / 15IP / 20IP

Workbench stand

L-key with key handle set**TORX incl. work bench stand, 8-pcs., black oxidised**

365VB

Order-No.



25624

1

● T6 / T7 / T8 / T9 / T10 / T15 / T20

Workbench stand

L-key with flag handle set**TORX incl. work bench stand, 8-pcs., black oxidised**

370VB

Order-No.



25625

1

● T6 / T7 / T8 / T9 / T10 / T15 / T20

Workbench stand

L-keys



hexagonal ball MagicRing® in fluorescent colour

369RF

Order-No.		mm				
41973	3.0	128	23	orange	10	
41974	4.0	142	29	purple	10	
41975	5.0	163	33	dark green	10	
41976	6.0	184	38	red	10	
41977	8.0	206	44	dark blue	10	
41978	10.0	231	50	anthracite	5	

Based on ISO 2936L.

L-keys



hexagonal ball in floourescent colour

369F

Order-No.		mm				
41894	1.5	91	15	yellow	10	
41895	2.0	101	18	light blue	10	
41896	2.5	113	20	light green	10	
41897	3.0	128	23	orange	10	
41898	4.0	142	29	purple	10	
41899	5.0	163	33	dark green	10	
41900	6.0	184	38	red	10	
41901	8.0	206	44	dark blue	10	
41902	10.0	231	50	anthracite	5	

L-keys



Hexagonal ball end MagicRing® matt chrome-plated

369RF

Order-No.		mm				
20549	3.0	128	23	10		
20550	4.0	142	29	10		
20570	5.0	163	33	10		
20551	6.0	184	38	10		
20552	8.0	206	44	10		
20553	10.0	231	50	5		

Based on ISO 2936L.

Hexagonal ball end MagicRing®, inch design matt chrome-plated

369RZ

Order-No.		mm				
24302	1/8"	121	23	3.2	10	
24304	9/64"	136	27	3.6	10	
24303	5/32"	148	29	4.0	10	
24305	3/16"	163	33	4.8	10	
24306	7/32"	176	36	5.6	10	
24307	1/4"	191	38	6.4	10	
24308	5/16"	210	43	7.9	10	
24341	3/8"	232	49	9.5	10	

Based on ASME B18.3.

L-keys**Ball end hex L-key, short.****Hexagonal ball end with short side, matt chrome-plated**

369T

Order-No.		mm		
35482	1.5	91	5.5	10
35483	2.0	101	9	10
35484	2.5	113	9.5	10
35485	3.0	128	11	10
35486	4.0	142	13	10
35487	5.0	163	15	10
35488	6.0	184	18	10
35489	8.0	206	22	10
35490	10.0	231	28	5

Based on ISO 2936L.

Hexagonal ball end, short, matt chrome-plated

369K

Order-No.		mm		
40401	1.5	46	15	10
40402	2.0	51	18	10
40403	2.5	57	20	10
40404	3.0	64	23	10
40405	4.0	72	29	10
40406	5.0	83	33	10
40407	6.0	94	38	10
40408	8.0	105	44	10
40409	10.0	119	50	10

ISO 2936K.

L-keys**L-keys****Hexagonal ball end matt chrome-plated**

369

Order-No.		mm		
01392	1.5	91	15	10
01393	2.0	101	18	10
01395	2.5	113	20	10
01396	3.0	128	23	10
01398	4.0	142	29	10
01400	5.0	163	33	10
01402	6.0	184	38	10
07922	7.0	195	39	5
01404	8.0	206	44	10
36452	9.0	217	47	5
01406	10.0	231	50	5
01408	12.0	259	57	5

Based on ISO 2936L.

Matt chrome-plated hexagonal ball end in inch design

369Z

Order-No.		mm		
29471	0,05"	72	13	1.3
29472	1/16"	80	15	1.6
29474	5/64"	88	18	2.0
29473	3/32"	101	20	2.4
29475	7/64"	111	21	2.8

Based on ASME B18.3.

L-keys**SINGLE-ITEM**

Order-No.		mm			369B
01391	1.3	74	14	10	
05638	1.5	91	15	10	
03868	2.0	101	18	10	
03869	2.5	113	20	10	
03870	3.0	128	23	10	
03871	4.0	142	29	10	
03872	5.0	163	33	10	
03873	6.0	184	38	10	
03874	8.0	206	44	10	
03875	10.0	231	50	10	
03876	12.0	259	57	10	

Based on ISO 2936L.

L-keys**Hex , black oxidised**

Order-No.		mm			352B
06358	0.7	67	6	10	
06359	0.9	70	9	10	
06360	1.3	80	13	10	
06059	1.5	91	15	10	
06361	2.0	101	18	10	
06362	2.5	113	20	10	
06363	3.0	128	23	10	
06364	4.0	142	29	10	
06365	5.0	163	33	10	
06366	6.0	184	38	10	
06367	7.0	194	41	10	
06368	8.0	206	44	10	
06369	10.0	231	50	5	
06370	12.0	259	57	5	
06371	14.0	291	70	5	

Based on ISO 2936L.

L-keys**Hexagonal ball end in inch design, black oxidised**

Order-No.		mm			369ZB
01422	0,05"	72	13	1.3	10
01423	1/16"	80	15	1.6	10
01431	5/64"	88	18	2.0	10
01427	3/32"	101	20	2.4	10
01433	7/64"	111	21	2.8	10
01425	1/8"	121	23	3.2	10
01434	9/64"	136	27	3.6	10
01430	5/32"	148	29	4.0	10
01426	3/16"	163	33	4.8	10
01432	7/32"	176	36	5.6	10
01424	1/4"	191	38	6.4	10
01429	5/16"	210	43	7.9	10
01428	3/8"	232	49	9.5	5

Based on ASME B18.3.

L-keys**L-keys****Hex, short, black oxidised**

350

Order-No.		mm			
06218	1.3	41	13	10	
01121	1.5	46	15	10	
01122	2.0	51	18	10	
01123	2.5	57	20	10	
01124	3.0	64	23	10	
01126	4.0	72	29	10	
01128	5.0	83	33	10	
01130	6.0	94	38	10	
01131	7.0	99	41	10	
01132	8.0	105	44	50	
01133	9.0	112	47	5	
01134	10.0	119	50	5	
01135	11.0	126	53	5	
01136	12.0	134	57	5	
01137	14.0	151	70	5	
01138	17.0	173	80	5	
01139	19.0	195	89	5	
01140	22.0	217	102	1	
01141	24.0	241	114	1	
01142	27.0	271	127	1	
01143	32.0	339	157	1	

ISO 2936K.

TORX® MagicSpring®, black oxidised

366R

Order-No.		mm			
31233	T6	80	15	1/16"	10
31235	T8	101	20	3/32"	10
31234	T7	88	18	5/64"	10
31236	T9	111	21	7/64"	10
31237	T10	121	23	1/8"	10
31238	T15	136	27	9/64"	10
31239	T20	148	29	5/32"	10
31240	T25	163	33	3/16"	10
31241	T27	176	36	7/32"	10
31242	T30	191	38	1/4"	10
31243	T40	210	43	5/16"	10
31244	T45	232	49	3/8"	10

L-keys**ProStar TORX® hexagonal ball end, black oxidised**

366BE

Order-No.		mm			
32386	T9	111	21	7/64"	10
32387	T10	121	23	1/8"	10
32388	T15	136	27	9/64"	10
32389	T20	148	29	5/32"	10
32390	T25	163	33	3/16"	10
32391	T27	176	36	7/32"	10
32392	T30	191	38	1/4"	10
32393	T40	210	43	5/16"	10
33749	T45	232	49	3/8"	10

L-keys**TORX® ball end with short handle, titanium silver**

366BET

Order-No.		mm		in	
40966	T5	72	6.5	0,05"	10
40967	T6	80	6.9	1/16"	10
40968	T7	89	8.9	5/64"	10
40969	T8	101	10.4	3/32"	10
40970	T9	111	11.8	7/64"	10
40971	T10	122	12	1/8"	10
40972	T15	136	12.5	9/64"	10
40973	T20	149	13.3	5/32"	10
40974	T25	164.5	16.2	3/16"	10
40975	T27	176	18	7/32"	10
40976	T30	191	19.2	1/4"	10
40977	T40	210	24.1	5/16"	10
40978	T45	232	29.5	3/8"	10

TORX® ball end from size T9

L-keys**TORX®, black oxidised**

366

Order-No.		mm		in	
24313	T5	72	13	0,05"	10
24314	T6	80	15	1/16"	10
24315	T7	88	18	5/64"	10
24316	T8	101	20	3/32"	10
24317	T9	111	21	7/64"	10
24318	T10	121	23	1/8"	10
24319	T15	136	26	9/64"	10
24320	T20	148	29	5/32"	10
24321	T25	163	33	3/16"	10
24322	T27	176	36	7/32"	10
24323	T30	191	38	1/4"	10
24324	T40	210	43	5/16"	10
24325	T50	232	49	3/8"	10

L-keys**L-keys****TORX® titanium silver**

366TS

Order-No.		mm		in	
39106	T5	72	13	0,05"	10
39107	T6	80	15	1/16"	10
39108	T7	88	18	5/64"	10
39109	T8	101	20	3/32"	10
39110	T9	111	21	7/64"	10
39111	T10	121	23	1/8"	10
39112	T15	136	26	9/64"	10
39113	T20	148	29	5/32"	10
39114	T25	163	33	3/16"	10
39115	T27	176	36	7/32"	10
39116	T30	191	38	1/4"	10
39117	T40	210	43	5/16"	10
39118	T45	232	49	3/8"	10

TORX PLUS®, short, black oxidised

361IP

Order-No.		mm		in	
24515	7IP	44	18	2.5	10
24517	8IP	47	18	2.5	10
24519	9IP	51	19	3	10
24521	10IP	54	20	3	10
24523	15IP	58	22	3.5	10
24525	20IP	62	23	4	10
24527	25IP	67	25	4.5	10
24529	27IP	73	27	5.5	10
24531	30IP	79	30	6	10
24533	40IP	88	33	7	10

L-keys



TORX®, short, black oxidised

363

Order-No.		mm			
03764	T5	39	18	2.5	10
01310	T6	41	18	2.5	10
01311	T7	44	18	2.5	10
01312	T8	47	18	2.5	10
01313	T9	51	19	3	10
01314	T10	54	20	3	10
01315	T15	57	22	3.5	10
01316	T20	62	23	4	10
01317	T25	67	25	4.5	10
01318	T27	72	27	5.5	10
01319	T30	79	30	6	10
01320	T40	86	33	7	10
01321	T45	90	36	8	10
01322	T50	104	41	9	10
01323	T55	120	47	12	10
01324	T60	134	52	14	10

L-keys



TORX® Tamper Resistant (with hole), short, black oxidised

363TR

Order-No.		mm			
24107	T8H	47	18	2.5	10
24109	T9H	51	19	3	10
24111	T10H	54	20	3	10
24113	T15H	57	22	3.5	10
24115	T20H	62	23	4	10
24117	T25H	67	25	4.5	10
24119	T27H	72	27	5.5	10
24121	T30H	79	30	6	10
24123	T40H	86	33	7	10

L-key with T-handle ComfortGrip



L-key with T-handle ComfortGrip



Hexagon MagicRing® with side drive, matt chrome-plated

334DSR

Order-No.	3.0	100	13	80	26	10
26135	3.0	100	13	80	26	10
26136	4.0	150	13	80	26	10
26137	5.0	150	17	100	32	10
26138	6.0	150	17	100	32	10
26139	8.0	200	17	100	32	10
26140	10.0	200	22	120	38	5

Hex with side drive, matt chrome-plated

334DSR

Order-No.	2.0	100	13	80	26	10
26164	2.0	100	13	80	26	10
26165	2.5	100	13	80	26	10
26166	3.0	100	13	80	26	10
26167	4.0	150	13	80	26	10
26168	5.0	150	17	100	32	10
26169	6.0	150	17	100	32	10
26170	8.0	200	17	100	32	10
26171	10.0	200	22	120	38	5

L-key with T-handle ComfortGrip



L-key with T-handle ComfortGrip



Hexagonal ball end with side drive, matt chrome-plated

540DS

Order-No.	3.0	150	13	80	26	10
28372	3.0	150	13	80	26	10
28373	4.0	150	13	80	26	10
28374	5.0	150	17	100	32	10
28375	6.0	150	17	100	32	10
28376	8.0	200	17	100	32	10
28377	10.0	200	22	120	38	5

TORX® with side drive, matt chrome-plated

364DS

Order-No.	T10	100	13	80	26	10
26172	T10	100	13	80	26	10
26173	T15	100	13	80	26	10
26174	T20	100	17	100	32	10
26175	T25	150	17	100	32	10
26176	T27	150	17	100	32	10
26177	T30	150	17	100	32	10
26178	T40	150	17	100	32	10

L-key with T-handle**L-key with T-handle****Hexagon MagicRing® brilliant nickel-plated**

334R

Order-No.			mm		+	
22168	3.0	100	126	80	26	10
22170	4.0	150	176	80	26	10
22172	5.0	150	182	100	32	10
22174	6.0	150	182	100	32	10
21960	8.0	200	232	100	32	10
21962	10.0	200	238	120	38	10

Hexagon brilliant nickel-plated

334

Order-No.			mm		+	
00904	2.0	100	126	80	26	10
00905	2.0	200	226	80	26	10
00906	2.5	100	126	80	26	10
00907	2.5	200	226	80	26	10
00908	3.0	100	126	80	26	10
00909	3.0	150	176	80	26	10
00910	3.0	200	226	80	26	10
00911	3.0	350	382	100	32	10
00912	4.0	100	126	80	26	10
00913	4.0	150	176	80	26	10
00914	4.0	200	226	80	26	10
00915	4.0	350	382	100	32	10
00916	5.0	100	132	100	32	10
00917	5.0	150	182	100	32	10
00918	5.0	200	232	100	32	10
00919	5.0	350	382	100	32	10
00921	6.0	100	132	100	32	10
00922	6.0	150	182	100	32	10
00923	6.0	200	232	100	32	10
00924	6.0	350	382	100	32	10
00926	7.0	200	232	100	32	10
00928	8.0	100	132	100	32	10
00929	8.0	150	182	100	32	10
00930	8.0	200	232	100	32	10
00931	8.0	350	382	100	32	10
00933	10.0	100	138	120	38	10
00934	10.0	200	238	120	38	10
00937	12.0	200	238	120	38	5

Hexagonal ball end brilliant nickel-plated

540


Order-No.			mm		+	
04111	4.0	150	176	80	26	10
04108	5.0	150	182	100	32	10
04105	6.0	150	182	100	32	10
04099	8.0	200	238	100	32	10
04096	10.0	200	238	120	38	10



Nut driver with T-handle



Nut driver with T-handle

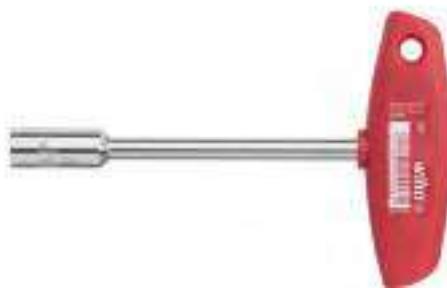

Hexagon brilliant nickel-plated

336

Order-No.			mm*				
00965	5.5	125	157	100	32	10	
00966	6.0	125	157	100	32	10	
00967	6.0	200	232	100	32	10	
00968	7.0	125	157	100	32	10	
00969	7.0	200	232	100	32	10	
00971	8.0	125	157	100	32	10	
00972	8.0	200	232	100	8	10	
00973	8.0	350	382	100	32	10	
00974	9.0	125	157	100	32	10	
00975	9.0	200	232	100	32	10	
00977	10.0	125	157	100	32	10	
00978	10.0	200	232	100	32	10	
00980	10.0	350	382	100	32	5	
00982	11.0	125	157	100	32	10	
00983	11.0	230	262	100	32	5	
00985	12.0	125	157	100	32	10	
00986	12.0	230	262	100	32	5	
00988	13.0	125	157	100	32	10	
00989	13.0	230	262	100	32	10	
00990	13.0	350	382	100	32	5	
00991	14.0	125	157	100	32	5	
00993	15.0	125	157	100	32	5	
00994	16.0	125	157	100	32	5	
00995	17.0	125	157	100	32	5	

Square nickel-plated

338

Order-No.			mm*				
01005	6	125	157	100	32	10	
01006	8	125	157	100	32	10	
01007	10	125	157	100	32	10	
01008	12	125	157	100	32	10	

L-key with T-handle



Hex, inch design brilliant nickel-plated

334Z

Order-No.			mm*				
02802	3/32"	150	176	80	26	10	
02803	7/64"	150	176	80	26	10	
02804	1/8"	150	176	80	26	10	
02805	9/64"	150	176	80	26	10	
02806	5/32"	150	176	80	26	10	
02807	3/16"	150	182	100	32	10	
02808	7/32"	150	182	100	32	10	
02809	1/4"	150	182	100	32	10	
02810	5/16"	150	182	100	32	10	
02811	3/8"	150	188	120	38	10	

Nut driver with T-handle**Nut driver with T-handle electric****Hex, inch design brilliant nickel-plated**

336Z

Order-No.	inch	mm	inch	mm	inch	mm	inch	mm
02819	3/16"	150	182	100	32	4.8	10	
02820	1/4"	150	182	100	32	6.4	10	
02821	5/16"	150	182	100	32	7.9	10	
02822	3/8"	150	182	100	32	9.5	10	
02823	7/16"	150	182	100	32	11.1	10	
02824	1/2"	150	182	100	32	12.7	10	

Hex

336N

Order-No.	inch	mm	inch	mm	inch	mm	inch	mm
27932	8.0	200	232	100	32	10		
27933	10.0	230	262	100	32	10		
27934	13.0	230	262	100	32	10		
27935	17.0	230	268	120	38	10		

Manufactured acc. to IEC 60900.

L-key with T-handle electric**Hex**

334N

Order-No.	inch	mm	inch	mm	inch	mm	inch	mm
27928	4.0	150	176	80	26	10		
27929	5.0	150	182	100	32	10		
27930	6.0	150	182	100	32	10		
27931	8.0	150	182	100	32	10		

Manufactured acc. to IEC 60900.

L-key with T-handle**L-key with T-handle****TORX® matt chrome-plated**


364

Order-No.				mm				
01328	T9	100	4	126	80	26	10	
01329	T10	100	4	126	80	26	10	
01330	T15	100	4	126	80	26	10	
01331	T15	200	5.5	226	80	26	10	
01332	T20	100	4	132	100	32	10	
01333	T20	200	5.5	232	100	32	10	
01334	T25	100	4.5	132	100	32	10	
01335	T25	200	5.5	232	100	32	10	
01336	T27	100	5.5	132	100	32	10	
01337	T27	200	5.5	232	100	32	5	
01338	T30	100	6	132	100	32	10	
01339	T30	200	6	232	100	32	5	
01340	T40	100	7	132	100	32	10	
01341	T40	200	7	232	100	32	5	
01343	T45	250	8	288	120	38	5	
01345	T50	250	9	288	120	38	5	

TORX PLUS® matt chrome-plated

364IP

Order-No.				mm				
26953	9IP	100	4	126	80	26	10	
26954	10IP	100	4	126	80	26	10	
26955	15IP	100	4	126	80	26	10	
26956	20IP	100	4	132	100	32	10	
26957	25IP	150	4.5	182	100	32	10	
26958	27IP	150	5.5	182	100	32	10	
26959	30IP	150	6	182	100	32	10	
26960	40IP	150	7	182	100	32	10	

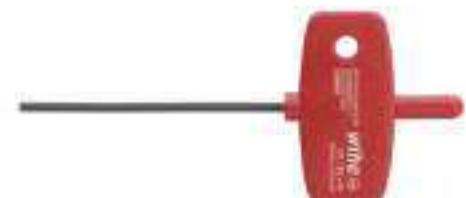L-key with T-handle**L-key with key handle****TORX® MagicSpring® matt chrome-plated**

364R

Order-No.				mm				
27964	T9	100	4	126	80	26	10	
27965	T10	100	4	126	80	26	10	
27966	T15	100	4	126	80	26	10	
27967	T20	100	4	132	100	32	10	
27968	T25	100	5	132	100	32	10	
27970	T30	100	6	132	100	32	10	
27971	T40	100	8	132	100	32	10	

Hex , black oxidised

331

Order-No.				mm				
00894	1.5			60	95	40	10	
00895	2.0			60	95	40	10	
00896	2.5			60	95	40	10	
00897	3.0			60	95	40	10	

L-key with key handle



TORX®, black oxidised

Order-No.				mm		
04918	T5	35	2	70	40	10
01350	T6	35	2	70	40	10
01351	T7	35	2.5	70	40	10
01352	T8	40	2.5	75	40	10
01353	T9	40	3	75	40	10
01354	T10	40	3	75	40	10
01355	T15	45	3.5	80	40	10
01356	T20	45	4	80	40	10

365

L-key with flag handle



TORX®, black oxidised

Order-No.				mm		
03724	T5	35	2	62	15	10
03725	T6	35	2	62	15	10
03726	T7	35	2.5	67	19	10
03727	T8	40	2.5	72	19	10
03728	T9	40	3	74	24	10
03729	T10	40	3	74	24	10
03730	T15	45	3.5	80	28	10
03731	T20	45	4	80	28	10

370

L-key with key handle



TORX®, black oxidised

Order-No.				mm		
26181	5IP	2	70	40	10	
26182	6IP	2	70	40	10	
26183	7IP	2.5	70	40	10	
26184	8IP	2.5	75	40	10	
26185	9IP	3	75	40	10	
26186	10IP	3	75	40	10	
26187	15IP	3.5	80	40	10	
26188	20IP	4	80	40	10	

365P

L-key with flag handle



TORX PLUS®, black oxidised

Order-No.				mm		
27614	5IP	35	2	67	15	10
27615	6IP	35	2	67	15	10
27616	7IP	35	2.5	67	19	10
27617	8IP	40	2.5	72	19	10
27618	9IP	40	3	74	24	10
27619	10IP	40	3	74	24	10
27620	15IP	45	3.5	80	28	10
27621	20IP	45	4	80	28	10

370P



Bits

The indispensable three.

Which machine? Which application? Which bit? The revolutionary Wiha bit concept puts an end to any confusion and presents three bit types which can cover all areas of use.

Only the screw shape is crucial for selecting the bit. The Y bit is ideal for fastening Y-shaped screws with an angle no greater than 90° between the thread and screw head. The T bit is used for T-shaped screws at a 90° angle. If you need to fasten both screw types, then the TY bit is the right choice since this universal bit is suitable for all type of fastenings.

A selection of different bit holders and bit boxes such as the BitBuddy® and XLSelector ensures optimum usage of bits.

Application Bits

For all screw types	BitBuddy® TY bit set, 49 mm Pozidriv 8-pcs. 1/4" E6,3 Page 232	BitBuddy® TY bit set, 29 mm Pozidriv 9-pcs. 1/4" C6,3 Page 234	TY bit 49 mm Phillips (PH1), 5-pcs. 1/4" E6,3 in box Page 233	TY bit set 29 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 235
---------------------	--	--	---	---



For T-shaped screws	XLSelector T bit set, 25 mm Phillips, TORX®, hex 32-pcs. 1/4" C6,3 Page 236	FlipSelector T bit set, 25 mm Hexagon 14-pcs. 1/4" C6,3 Page 236	T bit set, 50 mm Phillips (PH1), 5-pcs. 1/4" E6,3 in box Page 237	T bit set, 25 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 237
---------------------	---	--	---	---



For Y-shaped screws	XLSelector Y bit set, 25 mm TORX® 32-pcs. 1/4" C6,3 Page 238	FlipSelector Y bit set, 25 mm Pozidriv 14-pcs. 1/4" C6,3 Page 239	Y bit set, 50 mm Phillips (PH1), 5-pcs. 1/4" E6,3 in box Page 239	Y bit set, 25 mm Phillips (PH1), 5-pcs. 1/4" C6,3 in box Page 240
---------------------	--	---	---	---



For universal applications	Bit set XLSelector Standard 25 mm assorted 32-pcs. 1/4" C6,3 Page 241	Bit set FlipSelector Standard 25 mm SIT (for Assy® and Pias screws), 15-pcs. 1/4" C6,3 with belt clip in blister pack Page 242	Bit Standard 25 mm Slotted 1/4" C6,3 Page 246	Bit Professional Slotted 1/4" E6,3 Page 250
----------------------------	---	--	---	---



MicroBits	Micro-bit set ESD Mixed 66-pcs. incl. box Page 254	Micro-bit 28 mm Slotted drive C4 4 mm Page 255		
-----------	--	--	--	--



Bit holder	Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box Page 260	Bit holder CentroFix Super Slim mechanically lockable 1/4" in box Page 260	Bit holder MagicFlip Force magnetic with ring magnet, 1/4" in box Page 260	
------------	---	--	--	--



Special solutions	Combination drill bit set 1/4" 6-pcs. incl. box Page 257	Countersink bit 1/4" Page 257	Screwdriver with SoftFinish® CentroFix bit holder, mechanically lockable 1/4" Page 263	
-------------------	--	---	--	--



BitBuddy® TY bit set, 49 mm



Pozidriv 8-pcs. 1/4" E6,3

Order-No.	SB7946TY202
42099	6
⊕	1 x TY-Bit 49 mm Pozidriv 1/4" PZ1 / 5 x TY-Bit 49 mm Pozidriv 1/4" PZ2 / 1 x TY-Bit 49 mm Pozidriv 1/4" PZ3
⊗	1 x BitBuddy®

TORX® 8-pcs. 1/4" E6,3

Order-No.	SB7946TY505
42115	6
⊕	1 x TY-Bit 49 mm TORX® 1/4" / 1 x TY-Bit 49 mm TORX® 1/4" / 2 x TY-Bit 49 mm TORX® 1/4" / 1 x TY-Bit 49 mm TORX® 1/4" / 1 x TY-Bit 49 mm TORX® 1/4" / 1 x TY-Bit 49 mm TORX® 1/4"
⊗	1 x BitBuddy®

* compared to Wiha standard bit

Hexagon 8-pcs. 1/4" E6,3

Order-No.	SB7946TY303
42114	6
⊕	2 x TY-Bit 49 mm Hex 1/4" SW3 / 2 x TY-Bit 49 mm Hex 1/4" SW4 / 2 x TY-Bit 49 mm Hex 1/4" SW5 / 1 x TY-Bit 49 mm Hex 1/4" SW6
⊗	1 x BitBuddy®

* compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 8-pcs., 1/4" E6,3

Order-No.	SB7946TY903
42116	6
⊕	1 x TY-Bit 49 mm Phillips 1/4"
⊗	1 x TY-Bit 49 mm Pozidriv 1/4" PZ1 / 1 x TY-Bit 49 mm Pozidriv 1/4" PZ2 / 1 x TY-Bit 49 mm Pozidriv 1/4" PZ3
⊗	1 x TY-Bit 49 mm TORX® 1/4" / 1 x TY-Bit 49 mm TORX® 1/4" / 1 x TY-Bit 49 mm TORX® 1/4"
⊗	1 x BitBuddy®

* compared to Wiha standard bit
compared to Wiha standard bit

TY bit 49 mm



5-pcs. 1/4" E6,3 in box

Order-No.	
42097	⊕ 5 x PH1
42119	⊕ 5 x PH2
42120	⊕ 5 x PH3
42121	⊗ 5 x PZ1
42122	⊗ 5 x PZ2
42123	⊗ 5 x PZ3
42124	● 5 x SW3
42125	● 5 x SW4
42126	● 5 x SW5
42127	● 5 x SW6
42128	● 5 x T10
42129	● 5 x T15
42130	● 5 x T20
42131	● 5 x T25
42132	● 5 x T27
42133	● 5 x T30
42134	● 5 x T40

* compared to Wiha standard bit

INFOBOX: BitBuddy 29



Easy, single-hand operation.

Attaching:

- Bits are directly picked up with the machine from the BitBuddy.
- Gets your fastenings done.

Storing

- Bits are easily returned to the BitBuddy, by pressing on the red bit strip.
- With magnetic bit holder for a rapid bit change.
- BitBuddy is always at hand - easily fits into trouser pockets or onto the belt clip.

Bit Set BitBuddy® TY-Bit 29 mm



TORX® 9-pcs. 1/4" C6,3

SB7945TY505

Order-No.

42136



6

- 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4"

- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box

1 x BitBuddy®

* compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 9-pcs., 1/4" C6,3

SB7945TY904

Order-No.

42138



6

- 1 x TY-Bit 29 mm Phillips 1/4" PH2

- 1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 1 x TY-Bit 29 mm Pozidriv 1/4" PZ1

- 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4"

- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box

1 x BitBuddy®

* compared to Wiha standard bit

Hexagon 9-pcs. 1/4" C6,3

SB7945TY303

Order-No.

42135



6

- 2 x TY-Bit 29 mm Hex 1/4" / 2 x TY-Bit 29 mm Hex 1/4" / 2 x TY-Bit 29 mm Hex 1/4" / 1 x TY-Bit 29 mm Hex 1/4"

- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box

1 x BitBuddy®

* compared to Wiha standard bit

Pozidriv, TORX® 9-pcs. 1/4" C6,3

SB7945TY905

Order-No.

42139



6

- 1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 1 x TY-Bit 29 mm Pozidriv 1/4" PZ3

- 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4"

- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box

1 x BitBuddy®

* compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 9-pcs., 1/4" C6,3

SB7945TY903

Order-No.

42137



6

- 1 x TY-Bit 29 mm Phillips 1/4" PH2
- 1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / TY-Bit 29 mm Pozidriv 1/4" PZ3
- 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4" / 1 x TY-Bit 29 mm TORX® 1/4"

- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box

1 x BitBuddy®

* compared to Wiha standard bit

Pozidriv 9-pcs. 1/4" C6,3

SB7945TY202

Order-No.

42098



6

- 1 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 5 x TY-Bit 29 mm Pozidriv 1/4" PZ1 / 1 x TY-Bit 29 mm Pozidriv 1/4" PZ3

- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box

1 x BitBuddy®

* compared to Wiha standard bit

TY bit set 29 mm



5-pcs. 1/4" C6,3 in box

Order-No.

42096	5 x PH1	6
42100	5 x PH2	6
42101	5 x PH3	6
42149	5 x PZ1	6
42102	5 x PZ2	6
42103	5 x PZ3	6
42104	5 x SW3	6
42105	5 x SW4	6
42106	5 x SW5	6
42107	5 x SW6	6
42108	5 x T10	6
42109	5 x T15	6
42110	5 x T20	6
42111	5 x T25	6
42112	5 x T27	6
42113	5 x T30	6
42150	5 x T40	6

* compared to Wiha standard bit

25-pcs. 1/4" C6,3 in box

Order-No.

42539	25 x PH2	1
42551	25 x PZ2	1
42548	25 x T20	1
42549	25 x T25	1
42550	25 x T30	1

* compared to Wiha standard bit

INFOBOX: Wiha TY bit concept



- Bits quickly and easily selected thanks to the screw head shape.
- The T bit is ideal for fastening T-shaped screws with an angle of 90°.
- The Y bit is ideal for fastening Y-shaped screws with an angle not equal to 90°.
- Universal in its use, the TY bit is suitable for all types of screws, no matter whether they feature a Y-shaped or T-shaped screw head.

XLSelector T bit set, 50 mm**Phillips, TORX®, hex 14-pcs. 1/4" E6,3**

SB7948T950

Order-No.

41831

6

- 1 x T-Bit 50 mm Phillips 1/4" PH1 / 1 x T-Bit 50 mm Phillips 1/4" PH2 / 1 x T-Bit 50 mm Phillips 1/4" PH3
- 1 x T-Bit 50 mm TORX® 1/4" T15 / 1 x T-Bit 50 mm TORX® 1/4" T20 / 1 x T-Bit 50 mm TORX® 1/4" T25 / 1 x T-Bit 50 mm TORX® 1/4" T30 / 1 x T-Bit 50 mm TORX® 1/4" T40
- 1 x T-Bit 50 mm Hexagon 1/4" SW3 / 1 x T-Bit 50 mm Hexagon 1/4" SW4 / 1 x T-Bit 50 mm Hexagon 1/4" SW5 / 1 x T-Bit 50 mm Hexagon 1/4" SW6
- 1 x Bit holder magnetic 58 mm 1/4"

1 x XLSelector

* compared to Wiha standard bit

FlipSelector T bit set, 25 mm**Hexagon 14-pcs. 1/4" C6,3**

SB7947T303

Order-No.

41825

6

- 3 x T-Bit 25 mm Hexagon 1/4" SW3 / 3 x T-Bit 25 mm Hexagon 1/4" SW4 / 3 x T-Bit 25 mm Hexagon 1/4" SW5 / 3 x T-Bit 25 mm Hexagon 1/4" SW6
- 1 x Bit holder magnetic 58 mm 1/4"
- 1 x FlipSelector

* compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 14-pcs., 1/4" C6,3

SB7947T906

Order-No.

41824

6

- 1 x T-Bit 25 mm Phillips 1/4" PH1 / 3 x T-Bit 25 mm Phillips 1/4" PH2 / 1 x T-Bit 25 mm Phillips 1/4" PH3
- 1 x T-Bit 25 mm Pozidriv 1/4" PZ2
- 1 x T-Bit 25 mm TORX® 1/4" T10 / 1 x T-Bit 25 mm TORX® 1/4" T15 / 1 x T-Bit 25 mm TORX® 1/4" T20 / 1 x T-Bit 25 mm TORX® 1/4" T25 / 1 x T-Bit 25 mm TORX® 1/4" T30 / 1 x T-Bit 25 mm TORX® 1/4" T40
- 1 x Bit holder magnetic 58 mm 1/4"
- 1 x FlipSelector

* compared to Wiha standard bit

XLSelector T bit set, 25 mm**Phillips, TORX®, hex 32-pcs. 1/4" C6,3**

SB7948T999

Order-No.

41830

6

- 2 x T-Bit 25 mm Phillips 1/4" PH1 / 4 x T-Bit 25 mm Phillips 1/4" PH2 / 2 x T-Bit 25 mm Phillips 1/4" PH3
- 2 x T-Bit 25 mm TORX® 1/4" T10 / 2 x T-Bit 25 mm TORX® 1/4" T15 / 4 x T-Bit 25 mm TORX® 1/4" T20 / 2 x T-Bit 25 mm TORX® 1/4" T25 / 2 x T-Bit 25 mm TORX® 1/4" T30 / 2 x T-Bit 25 mm TORX® 1/4" T40
- 2 x T-Bit 25 mm Hexagon 1/4" SW3 / 2 x T-Bit 25 mm Hexagon 1/4" SW4 / 2 x T-Bit 25 mm Hexagon 1/4" SW5 / 2 x T-Bit 25 mm Hexagon 1/4" SW6
- 1 x Bit holder magnetic 58 mm 1/4"

1 x XLSelector

* compared to Wiha standard bit

assorted 14-pcs. 1/4" C6,3

SB7947T999

Order-No.

41826

6

- 1 x T-Bit 25 mm Phillips 1/4" PH1 / 1 x T-Bit 25 mm Phillips 1/4" PH2 / 1 x T-Bit 25 mm Phillips 1/4" PH3
- 1 x T-Bit 25 mm Pozidriv 1/4" PZ2
- 1 x T-Bit 25 mm TORX® 1/4" T15 / 1 x T-Bit 25 mm TORX® 1/4" T20 / 1 x T-Bit 25 mm TORX® 1/4" T25 / 1 x T-Bit 25 mm TORX® 1/4" T30 / 1 x T-Bit 25 mm TORX® 1/4" T40
- 1 x T-Bit 25 mm Hexagon 1/4" SW4 / 1 x T-Bit 25 mm Hexagon 1/4" SW5 / 1 x T-Bit 25 mm Hexagon 1/4" SW6
- 1 x Bit holder magnetic 58 mm 1/4"
- 1 x FlipSelector

* compared to Wiha standard bit

T bit set, 50 mm



T bit set, 25 mm



5-pcs. 1/4" E6,3 in box

Order-No.

41637	⊕ 5 x PH1	6
41638	⊕ 5 x PH2	6
41639	⊕ 5 x PH3	6
41640	⊗ 5 x PZ1	6
41641	⊗ 5 x PZ2	6
41642	⊗ 5 x PZ3	6
41650	● 5 x SW3	6
41651	● 5 x SW4	6
41652	● 5 x SW5	6
41653	● 5 x SW6	6
41643	◆ 5 x T10	6
41644	◆ 5 x T15	6
41645	◆ 5 x T20	6
41646	◆ 5 x T25	6
41648	◆ 5 x T30	6
41649	◆ 5 x T40	6
41660	□ 5 x #1	6
41662	□ 5 x #2	6
41663	□ 5 x #3	6

* compared to Wiha standard bit

5-pcs. 1/4" C6,3 in box

Order-No.

41598	⊕ 5 x PH1	6
41599	⊕ 5 x PH2	6
41600	⊕ 5 x PH3	6
41601	⊗ 5 x PZ1	6
41602	⊗ 5 x PZ2	6
41603	⊗ 5 x PZ3	6
41611	● 5 x SW3	6
41612	● 5 x SW4	6
41613	● 5 x SW5	6
41614	● 5 x SW6	6
41604	◆ 5 x T10	6
41605	◆ 5 x T15	6
41606	◆ 5 x T20	6
41607	◆ 5 x T25	6
41609	◆ 5 x T30	6
41610	◆ 5 x T40	6
41621	□ 5 x #1	6
41622	□ 5 x #2	6
41623	□ 5 x #3	6

* compared to Wiha standard bit



25-pcs. 1/4" C6,3 in box

Order-No.

42292	⊕ 25 x PH2	1
42293	⊗ 25 x PZ2	1
42301	◆ 25 x T20	1
42306	◆ 25 x T25	1
42302	◆ 25 x T30	1

* compared to Wiha standard bit

XLSelector Y bit set, 50 mm**Phillips, Pozidriv, TORX®, 14-pcs., 1/4" E6,3**

SB7948Y950

Order-No.



41834

6

- 2 x Y-Bit 50 mm Pozidriv 1/4" PH2
- 1 x Y-Bit 50 mm Pozidriv 1/4" PZ1 / 2 x Y-Bit 50 mm Pozidriv 1/4" PZ2 / 1 x Y-Bit 50 mm Pozidriv 1/4" PZ3
- 1 x Y-Bit 50 mm TORX® 1/4" T10 / 1 x Y-Bit 50 mm TORX® 1/4" T15 / 1 x Y-Bit 50 mm TORX® 1/4" T20 / 1 x Y-Bit 50 mm TORX® 1/4" T25 / 1 x Y-Bit 50 mm TORX® 1/4" T30 / 1 x Y-Bit 50 mm TORX® 1/4" T40
- 1 x Bit holder magnetic 58 mm 1/4"
- 1 x XLSelector

* compared to Wiha standard bit

XLSelector Y bit set, 25 mm**TORX® 32-pcs. 1/4" C6,3**

SB7948Y505

Order-No.



41833

6

- 3 x Y-Bit 25 mm TORX® 1/4" T10 / 6 x Y-Bit 25 mm TORX® 1/4" T15 / 6 x Y-Bit 25 mm TORX® 1/4" T20 / 6 x Y-Bit 25 mm TORX® 1/4" T25 / 6 x Y-Bit 25 mm TORX® 1/4" T30 / 3 x Y-Bit 25 mm TORX® 1/4" T40
- 1 x Bit holder magnetic 58 mm 1/4"
- 1 x XLSelector

* compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 32-pcs., 1/4" C6,3

SB7948Y904

Order-No.



41832

6

- 1 x Y-Bit 25 mm Phillips 1/4" PH1 / 4 x Y-Bit 25 mm Phillips 1/4" PH2 / 1 x Y-Bit 25 mm Phillips 1/4" PH3
- 2 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 4 x Y-Bit 25 mm Pozidriv 1/4" PZ2 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ3
- 2 x Y-Bit 25 mm TORX® 1/4" T10 / 3 x Y-Bit 25 mm TORX® 1/4" T15 / 3 x Y-Bit 25 mm TORX® 1/4" T20 / 3 x Y-Bit 25 mm TORX® 1/4" T25 / 3 x Y-Bit 25 mm TORX® 1/4" T30 / 2 x Y-Bit 25 mm TORX® 1/4" T40
- 1 x Bit holder magnetic 58 mm 1/4"
- 1 x XLSelector

* compared to Wiha standard bit

FlipSelector Y bit set, 25 mm**Pozidriv 14-pcs. 1/4" C6,3**

SB7947Y202

Order-No.



41829

6

- 2 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 8 x Y-Bit 25 mm Pozidriv 1/4" PZ2 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ3
- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box
- 1 x FlipSelector

* compared to Wiha standard bit

TORX® 14-pcs. 1/4" C6,3

SB7947Y505

Order-No.



41828

6

- 2 x Y-Bit 25 mm TORX® 1/4" T10 / 2 x Y-Bit 25 mm TORX® 1/4" T15 / 3 x Y-Bit 25 mm TORX® 1/4" T20 / 2 x Y-Bit 25 mm TORX® 1/4" T25 / 2 x Y-Bit 25 mm TORX® 1/4" T30 / 1 x Y-Bit 25 mm TORX® 1/4" T40
- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box
- 1 x FlipSelector

* compared to Wiha standard bit

Phillips, Pozidriv, TORX®, 14-pcs., 1/4" C6,3

SB7947Y904

Order-No.



41827

6

- 1 x Y-Bit 25 mm Phillips 1/4" PH2
- 1 x Y-Bit 25 mm Pozidriv 1/4" PZ1 / 2 x Y-Bit 25 mm Pozidriv 1/4" PZ2 / 1 x Y-Bit 25 mm Pozidriv 1/4" PZ3
- 1 x Y-Bit 25 mm TORX® 1/4" T10 / 1 x Y-Bit 25 mm TORX® 1/4" T15 / 1 x Y-Bit 25 mm TORX® 1/4" T20 / 1 x Y-Bit 25 mm TORX® 1/4" T25 / 1 x Y-Bit 25 mm TORX® 1/4" T30 / 1 x Y-Bit 25 mm TORX® 1/4" T40
- 1 x Bit holder magnetic 60 mm 1/4" extra strong magnet in box
- 1 x FlipSelector

* compared to Wiha standard bit

Y bit set, 50 mm**5-pcs. 1/4" E6,3 in box**

Order-No.

41624	5 x PH1	6
41625	5 x PH2	6
41626	5 x PH3	6
41627	5 x PZ1	6
41628	5 x PZ2	6
41629	5 x PZ3	6
41630	5 x T10	6
41631	5 x T15	6
41632	5 x T20	6
41633	5 x T25	6
41635	5 x T30	6
41636	5 x T40	6

* compared to Wiha standard bit

Y bit set, 25 mm**5-pcs. 1/4" C6,3 in box**

Order-No.		
41585	⊕ 5 x PH1	6
41586	⊕ 5 x PH2	6
41587	⊕ 5 x PH3	6
41588	⊗ 5 x PZ1	6
41589	⊗ 5 x PZ2	6
41590	⊗ 5 x PZ3	6
41591	◎ 5 x T10	6
41592	◎ 5 x T15	6
41593	◎ 5 x T20	6
41594	◎ 5 x T25	6
41596	◎ 5 x T30	6
41597	◎ 5 x T40	6

* compared to Wiha standard bit

Phillips (PH2), 25-pcs. 1/4" C6,3 in box

Order-No.		
42294	⊕ 25 x PH2	1
42295	⊗ 25 x PZ2	1
42303	◎ 25 x T20	1
42304	◎ 25 x T25	1
42305	◎ 25 x T30	1

* compared to Wiha standard bit

Belt clip**for bit set BitBuddy® and FlipSelector**

Order-No.		7945H
36990		10

Bit set XLSelector Standard 25 mm



Bit set XLSelector Standard 25 mm



assorted with bit ratchet 18-pcs. 1/4" C6,3

7948043

Order-No.	
36951	5
1 x PH1 / 1 x PH2	
1 x PZ1 / 1 x PZ2 / 1 x PZ3	
1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm	
1 x Bit holder magnetic 58 mm 1/4"	
1 x Bit ratchet 90 mm with thumb wheel Hexagon head, 1/4"	
1 x XLSelector	

assorted 32-pcs. 1/4" C6,3

7948005

Order-No.	
29417	5
1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm	
2 x PH1 / 4 x PH2 / 1 x PH3	
2 x PZ1 / 5 x PZ2 / 1 x PZ3	
2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40	
1 x Bit holder magnetic 58 mm 1/4"	
1 x XLSelector	

assorted 32-pcs. 1/4" C6,3

7948927

Order-No.	
29416	5
1 x 0 / 1 x 1 / 1 x 2 / 1 x 3 / 1 x 4	
1 x 4 / 1 x 6 / 1 x 8 / 1 x 10	
1 x TR2,0 / 1 x TR2,5 / 1 x TR3,0 / 1 x TR4,0 / 1 x TR5,0 / 1 x TR6,0	
1 x 6 / 1 x 8 / 1 x 10	
1 x T8H / 1 x T9H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x T25H / 1 x T27H / 1 x T30H / 1 x T40H	
1 x #1 / 1 x #2 / 1 x #3	
1 x CentroFix quick change holder, magnetic, form E 6.3	
1 x XLSelector	

Bit set FlipSelector Standard 25 mm



assorted 14-pcs. 1/4" C6,3

Order-No.	7947999
39078	10
⊖	1 x 5.5 mm
⊕	1 x PH2
⊗	1 x PZ1 / 1 x PZ2 / 1 x PZ3
⊛	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30
●	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

Slotted, Phillips, Pozidriv 14-pcs. 1/4" C6,3

Order-No.	7947005
39029	10
⊖	1 x 5.5 mm
⊕	1 x PH1 / 3 x PH2 / 1 x PH3
⊗	1 x PZ1 / 4 x PZ2 / 1 x PZ3
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

Phillips, Pozidriv, TORX®, 14-pcs., 1/4" C6,3

Order-No.	7947904
39040	10
⊕	2 x PH2
⊗	1 x PZ1 / 2 x PZ2 / 1 x PZ3
⊛	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

Pozidriv, TORX® 14-pcs. 1/4" C6,3

Order-No.	7947905
39041	10
⊗	1 x PZ1 / 2 x PZ2 / 1 x PZ3
⊛	1 x T10 / 1 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

TORX® 14-pcs. 1/4" C6,3

Order-No.	7947505
39124	10
⊛	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

TORX® Tamper Resistant (with hole) 14-pcs. 1/4" C6,3

Order-No.	7947505TR
39037	10
⊛	1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H / 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

Hexagon 12-pcs. 1/4" C6,3

Order-No.	7947902
39039	10
●	1 x 1.5 mm / 1 x 2.0 mm / 1 x 2.5 mm / 2 x 3.0 mm / 2 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

SIT (for Assy® and Pias screws), 14-pcs., 1/4" C6,3

Order-No.	7947995
39045	10
●	2 x SIT 10 / 4 x SIT 20 / 3 x SIT 25 / 2 x SIT 30 / 1 x SIT 40
○	1 x Bit holder magnetic 58 mm 1/4"
	1 x FlipSelector

Bit set FlipSelector Standard 25 mm



Mixed, 15-pcs. 1/4" C6,3 with belt clip in blister pack

SB7947999

Order-No.		
39083	5	
	1 x 5.5 mm	
	1 x PH2	
	1 x PZ1 / 1 x PZ2 / 1 x PZ3	
	1 x T15 / 1 x T20 / 1 x T25 / 1 x T30	
	1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm	
	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	

SIT (for Assy® and Pias screws), 15-pcs. 1/4" C6,3 with belt clip in blister pack

SB7947005

Order-No.		
39049	5	
	1 x 5.5 mm	
	1 x PH1 / 3 x PH2 / 1 x PH3	
	1 x PZ1 / 4 x PZ2 / 1 x PZ3	
	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	

Phillips, Pozidriv, TORX®, 15-pcs., 1/4" with belt clip, in blister pack

SB7947904

Order-No.		
39060	5	
	2 x PH2	
	1 x PZ1 / 2 x PZ2 / 1 x PZ3	
	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	

TORX®, 15-pcs., 1/4" C6,3 with belt clip, in blister pack

SB7947505

Order-No.		
39056	5	
	1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 1 x T30 / 1 x T40	
	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	

TORX® Tamper Resistant (with drill hole), 15-pcs., 1/4" C6,3 with belt clip, in blister pack

SB7947505TR

Order-No.		
39057	5	
	1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H / 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H	
	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	



Hex, 15-pcs., 1/4" C6,3 with belt clip in blister pack

SB7947902

Order-No.		
39059	5	
	1 x 1.5 mm / 1 x 2.0 mm / 1 x 2.5 mm / 2 x 3.0 mm / 2 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm / 1 x 8.0 mm	
	1 x Bit holder magnetic 58 mm 1/4"	
	1 x Belt clip	
	1 x FlipSelector	

Bit set Collector Standard 25 mm**Bit set Collector Security Standard 25 mm****assorted 33-pcs. 1/4" C6,3 incl. box**

7928913

Order-No.	(
34686	5
1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm	
2 x PH1 / 5 x PH2 / 2 x PH3	
2 x PZ1 / 5 x PZ2 / 2 x PZ3	
1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm	
1 x Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box	
1 x Screwdriver with bit holder SoftFinish® magnetic 1/4"	
1 x Collector Box	

assorted 28-pcs. 1/4" C6,3 incl. box

7928928

Order-No.	(
09393	5
1 x T8H / 1 x T10H / 1 x T15H / 1 x T20H / 1 x T25H /	
1 x T27H / 1 x T30H / 1 x T40H	
1 x 6 / 1 x 8 / 1 x 10	
1 x 1 / 1 x 2 / 1 x 3 / 1 x 4	
1 x 4 / 1 x 6 / 1 x 8 / 1 x 10	
1 x TR3/32 / 1 x TR5/64 / 1 x TR7/64 / 1 x TR1/8 /	
1 x TR9/64 / 1 x TR5/32	
1 x Bit holder magnetic 58 mm 1/4"	
1 x Screwdriver with bit holder SoftFinish® magnetic 1/4"	
1 x Collector Box	

Bit set Collector Standard 25 mm**assorted 62-pcs. 1/4" C6,3 incl. box**

7928923

Order-No.	(
07943	5
1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm	
7 x PH1 / 13 x PH2 / 3 x PH3	
7 x PZ1 / 13 x PZ2 / 3 x PZ3	
1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40	
1 x 3.0 mm / 1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm	
1 x Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box	
1 x Collector Box	

Bit set Standard 25 mm



assorted, 32-pcs. 1/4" C6,3 incl. box

797901

Order-No.	
26252	1
⊖	1 x 4.5 mm / 1 x 5.5 mm / 1 x 6.5 mm
⊕	2 x PH1 / 6 x PH2 / 1 x PH3
⊛	2 x PZ1 / 6 x PZ2 / 1 x PZ3
⊛	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40
●	1 x 4.0 mm / 1 x 5.0 mm / 1 x 6.0 mm
○	1 x Bit holder magnetic 60 mm 1/4"extra strong magnet in box
	1 x Bit box

Pozidriv, TORX® 32-pcs. 1/4" C6,3 incl. box

797902

Order-No.	
26253	1
⊛	5 x PZ1 / 10 x PZ2 / 3 x PZ3
⊛	2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T30 / 2 x T40
○	1 x Bit holder magnetic 60 mm 1/4"extra strong magnet in box
	1 x Bit box

TORX®, Pozidriv 32-pcs. 1/4" C6,3 incl. box

797903

Order-No.	
36310	1
⊛	2 x PZ1 / 3 x PZ2 / 1 x PZ3
⊛	2 x T10 / 6 x T15 / 6 x T20 / 6 x T25 / 2 x T30 / 2 x T40
○	1 x Bit holder magnetic 60 mm 1/4"extra strong magnet in box
	1 x Bit box

INFOBOX: Ball end hex



Wiha hexagonal ball end

- The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

INFOBOX: TORX® tamper-resistant safety profile



- This safety profile is used to hinder unwanted access to equipment such as intercoms, thermostats and night-storage heaters.
- You can fasten the Torx® tamper resistant profile with both Torx® H screws and normal Torx® screws.

INFOBOX: MagicRing®



Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

Bit Standard 25 mm**Slotted 1/4" C6,3**

7010Z

Order-No.		mm		
01623	4.5	25	0.6	10
01624	5.5	25	0.8	10
01626	6.5	25	1.2	10
01627	8.0	25	1.6	10

Phillips 1/4" C6,3

7011Z

Order-No.		mm		
05298	PH0	25		10
01657	PH1	25		10
01658	PH2	25		10
01659	PH3	25		10
01649	PH4	32		10

Pozidriv 1/4" C6,3

7012Z

Order-No.		mm		
05300	PZ0	25		10
01688	PZ1	25		10
01689	PZ2	25		10
01690	PZ3	25		10
01681	PZ4	32		10

TORX® 1/4" C6,3

7015Z

Order-No.		mm		
26250	T3	25		10
25097	T4	25		10
01711	T5	25		10
01712	T6	25		10
01713	T7	25		10
01714	T8	25		10
01715	T9	25		10
01716	T10	25		10
01717	T15	25		10
01718	T20	25		10
01719	T25	25		10
01720	T27	25		10
01721	T30	25		10
01722	T40	25		10
01723	T45	35		10
01724	T50	35		10

TORX® conical 1/4" C6,3

7015ZK

Order-No.		mm	
04925	T10	25	10
04926	T15	25	10
04927	T20	25	10
04928	T25	25	10
04929	T27	25	10
04930	T30	25	10
04931	T40	25	10

TORX PLUS® 1/4" C6,3

7016Z

Order-No.		mm	
25994	3IP	25	10
25996	4IP	25	10
25998	5IP	25	10
23173	6IP	25	10
23175	7IP	25	10
23177	8IP	25	10
23179	9IP	25	10
23181	10IP	25	10
23183	15IP	25	10
23185	20IP	25	10
23187	25IP	25	10
23189	27IP	25	10
23191	30IP	25	10
23193	40IP	25	10

TORX® Tamper Resistant (with hole) 1/4" C6,3

7015ZH

Order-No.		mm	
03115	T7H	25	10
03117	T8H	25	10
01726	T9H	25	10
01727	T10H	25	10
01728	T15H	25	10
01729	T20H	25	10
01730	T25H	25	10
01731	T27H	25	10
01732	T30H	25	10
01733	T40H	25	10

TORX PLUS® Security, 1/4" C6,3 (with hole)

7016ZIPR

Order-No.		mm	
27530	8IPR	25	10
26346	10IPR	25	10
26347	15IPR	25	10
26348	20IPR	25	10
26349	25IPR	25	10
26350	30IPR	25	10
26351	40IPR	35	10

MagicRing® hexagonal ball end, 1/4" C6,3

7017ZR

Order-No.		mm	
22959	3.0	38	10
22960	4.0	38	10
22961	5.0	38	10
22962	6.0	38	10

Internal square 1/4" C6,3

7018Z

Order-No.			mm	
06634	#1	2,3	25	5
06635	#2	2,8	25	5
06636	#3	3,3	25	5

Hexagonal ball end 1/4" C6,3

7017ZR

Order-No.		mm	
01734	1.5	38	10
01735	2.0	38	10
01736	2.5	38	10
01737	3.0	38	10
01738	4.0	38	10
01739	5.0	38	10
01740	6.0	38	10

MagicRing® hex 1/4" C6,3

7013RZ

Order-No.		mm	
22955	3.0	25	10
22956	4.0	25	10
22957	5.0	25	10
22958	6.0	25	10

Hexagon 1/4" C6,3

7013Z

Order-No.		mm	
04011	1.5	25	10
01703	2.0	25	10
01704	2.5	25	10
01705	3.0	25	10
01706	4.0	25	10
01707	5.0	25	10
39875	5.5	25	10
01708	6.0	25	10
01709	8.0	25	10
01710	10.0	25	10

Hexagon with hole 1/4" C6,3

7013ZH

Order-No.		mm	
25560	TR2,0	25	10
25561	TR2,5	25	10
25562	TR3,0	25	10
25563	TR4,0	25	10
25564	TR5,0	25	10
26309	TR6,0	25	10
20558	TR5/64	25	10
20556	TR3/32	25	10
20559	TR7/64	25	10
20555	TR1/8	25	10
20560	TR9/64	25	10
20557	TR5/32	25	10
30050	TR3/16	25	10

Spanner 1/4" C6,3

7019ZSP

Order-No.		mm	
27064	4	25	10
27065	6	25	10
27066	8	25	10
27067	10	25	10

Triple square 1/4" C6,3

7019ZXZN

Order-No.		mm	
26352	M3	25	10
26353	M4	25	10
26354	M5	25	10
26355	M6	25	10
26356	M8	35	10

SIT (for Assy® and Pias screws) 1/4" C6,3

7019ZSIT

Order-No.		mm	
27256	SIT 10	25	pink
27257	SIT 20	25	orange
27258	SIT 25	25	green
27259	SIT 30	25	yellow
27260	SIT 40	25	pink

Torq-Set® 1/4" C6,3

7019ZOTTS

Order-No.		mm	
26249	2	25	10
26045	3	25	10
22591	4	25	10
22592	5	25	10
22593	6	25	10
22594	8	25	10
22595	10	25	10
25572	1/4	32	10

Tri-Wing®, 1/4" C6,3

7019ZOTTW

Order-No.		mm	
22603	0	25	10
22604	1	25	10
22605	2	25	10
22606	3	25	10
22607	4	25	10
22608	5	25	10

Bit DryWall Stop Standard 25 mm**Phillips, 1/4"**

7011Z

Order-No.	⊕	mm	■
39382	PH2	25	10

08423	2 x T20	10
08424	2 x T25	10
24748	10 x T25	10
08425	2 x T30	10
24750	10 x T30	10
08426	2 x T40	10
36288	10 x T40	10
38649	2 x T10H	10
38650	2 x T15H	10
38651	2 x T20H	10
38652	2 x T25H	10
38653	2 x T30H	10
38654	2 x T40H	10
22655	1 x 4,0 x 5,0 x 6,0	10
38656	2 x 3,0	10
25681	2 x 4,0	10
25679	2 x 5,0	10
38657	2 x 6,0	10
38658	2 x #1	10
38659	2 x #2	10
38660	2 x #3	10

Bit set Standard 25 mm**10-tlg. 1/4" C6,3 in Box**

Order-No.	■
32055	10 x PH1
07855	3 x PH1
36275	20 x PH2
24733	10 x PH2
07856	3 x PH2
36280	10 x PH3
07857	3 x PH3
35709	20 x PZ1
32070	10 x PZ1
07859	3 x PZ1
36282	20 x PZ2
24742	10 x PZ2
07860	3 x PZ2
32071	10 x PZ3
07861	3 x PZ3
35832	10 x T10
08421	2 x T10
34746	10 x T15
08422	2 x T15
24746	10 x T20

Bit set reduced diameter 25 mm**10-pcs., 1/4" C6,3 in box**

Order-No.		
35834	⊕ 10 x PH2	10
36285	⊗ 10 x PZ2	10

Bit set Standard 25 mm**50-pcs. 1/4" C6,3 in bulk pack**

Order-No.		
08047	⊕ 1 x PH1	1
08048	⊕ 1 x PH2	1
08049	⊕ 1 x PH3	1
08056	⊗ 1 x PZ1	1
08057	⊗ 1 x PZ2	1
08058	⊗ 1 x PZ3	1
08065	⊛ 1 x T10	1
08066	⊛ 1 x T15	1
08067	⊛ 1 x T20	1
08068	⊛ 1 x T25	1
29544	⊛ 1 x T27	1
08069	⊛ 1 x T30	1
08070	⊛ 1 x T40	1

Bit set DryWall Stop 25 mm**Phillips, 2-pcs. 1/4" C6,3 in box**

XX7011--922---

Order-No.		
27077		10
⊕	PH2	

Bit Standard 25 mm**100-pcs. 1/4" C6,3 in bulk pack**

Order-No.		
40461	⊕ 1 x PH2	1
40462	⊗ 1 x PZ2	1
40463	⊛ 1 x T20	1
40464	⊛ 1 x T25	1
40465	⊛ 1 x T30	1

Bit Professional**Slotted 1/4" E6,3**

7040ZL

Order-No.				
33961	2.5	70	0.4	5
01790	3.0	50	0.5	5
33962	3.0	70	0.5	5
01792	3.5	50	0.6	5
33963	3.5	70	0.6	5
01791	4.0	50	0.5	5
01794	4.0	50	0.8	5
33964	4.0	70	0.8	5
01793	4.5	50	0.6	5
01795	5.5	50	0.8	5
01796	5.5	50	1.0	5
33965	5.5	70	1.0	5
01798	6.5	50	1.2	5
33966	6.5	70	1.2	5
01799	8.0	50	1.2	5
01800	8.0	50	1.6	5

Phillips 1/4" E6,3

7041Z

Order-No.				
31960	PH00	50	5	
31961	PH00	70	5	
31962	PH00	90	5	
32105	PH0	50	5	
35456	PH0	70	5	
35457	PH0	90	5	
33703	PH1	50	5	
01803	PH1	70	5	
04126	PH1	90	5	
23213	PH1	110	5	
23219	PH1	127	5	
22509	PH1	150	5	
33704	PH2	50	5	
01805	PH2	70	5	
04009	PH2	90	5	
05800	PH2	110	5	
06888	PH2	127	5	
22510	PH2	150	5	
33705	PH3	50	5	
04010	PH3	70	5	
04127	PH3	90	5	
23215	PH3	110	5	
23217	PH3	127	5	
22511	PH3	150	5	

Pozidriv 1/4" E6,3

7042Z

Order-No.				
31957	PZ0	50	5	
31958	PZ0	70	5	
31959	PZ0	90	5	
33706	PZ1	50	5	
01808	PZ1	70	5	
01809	PZ1	90	5	
23221	PZ1	110	5	
23225	PZ1	127	5	
23227	PZ1	150	5	
33707	PZ2	50	5	
01811	PZ2	70	5	
01812	PZ2	90	5	
05799	PZ2	110	5	
06889	PZ2	127	5	
23228	PZ2	150	5	
33708	PZ3	50	5	
04059	PZ3	70	5	
04176	PZ3	90	5	
23223	PZ3	110	5	
23226	PZ3	127	5	
22512	PZ3	150	5	

PlusMinus/Phillips 1/4" E6,3

7049PHM

Order-No.				
32490	SL/PH1	50	5	
32491	SL/PH1	70	5	
32686	SL/PH1	90	5	
32492	SL/PH2	50	5	
32493	SL/PH2	70	5	
32687	SL/PH2	90	5	

PlusMinus/Pozidriv 1/4" E6,3

7049PZM

Order-No.				
32494	SL/PZ1	50	5	
32495	SL/PZ1	70	5	
32688	SL/PZ1	90	5	
32496	SL/PZ2	50	5	
32497	SL/PZ2	70	5	
32689	SL/PZ2	90	5	

TORX® 1/4" E6,3

7045Z

Order-No.		mm	
39184	T1	50	5
39185	T2	50	5
39186	T3	50	5
39187	T4	50	5
32299	T5	50	5
32302	T6	50	5
33709	T6	70	5
33717	T6	90	5
38370	T6	150	5
32303	T7	50	5
33710	T7	70	5
33718	T7	90	5
38371	T7	150	5
32304	T8	50	5
33711	T8	70	5
33719	T8	90	5
36327	T8	150	5
32305	T9	50	5
33712	T9	70	5
33720	T9	90	5
38372	T9	150	5
32306	T10	50	5
33713	T10	70	5
33721	T10	90	5
33725	T10	110	5
33726	T10	150	5
32307	T15	50	5
33714	T15	70	5
33722	T15	90	5
33727	T15	110	5
33728	T15	150	5
32308	T20	50	5
33715	T20	70	5
33723	T20	90	5
33729	T20	110	5
33730	T20	150	5
32309	T25	50	5
33716	T25	70	5
33724	T25	90	5
33731	T25	110	5
33732	T25	150	5
33920	T27	50	5
33921	T27	70	5
33922	T27	90	5
33923	T30	50	5
33924	T30	70	5
33925	T30	90	5
33926	T30	110	5
33927	T30	150	5
33928	T40	50	5
33929	T40	70	5
33930	T40	90	5
33931	T40	110	5
33932	T40	150	5

TORX® ball end 1/4" E6,3

7045Z

Order-No.		mm	
32410	T10	50	5
32416	T10	70	5
32417	T15	50	5
32418	T15	70	5
32411	T20	50	5
32419	T20	70	5
32412	T25	50	5
32421	T25	70	5
32413	T27	50	5
32414	T30	50	5
32423	T30	70	5
32415	T40	50	5

TORX® MagicSpring® 1/4" E6,3

7045R

Order-No.		mm	
34452	T10	50	5
34453	T15	50	5
34454	T20	50	5
34455	T25	50	5
34456	T30	50	5
34457	T40	50	5

TORX® Tamper Resistant (with hole) 1/4" E6,3

7045ZH

Order-No.		mm	
21045	T7H	50	5
21047	T8H	50	5
20218	T9H	50	5
20219	T10H	50	5
39188	T10H	90	5
24867	T15H	50	5
39189	T15H	90	5
20220	T20H	50	5
39190	T20H	90	5
20221	T25H	50	5
39191	T25H	90	5
20222	T27H	50	5
39192	T27H	90	5
20223	T30H	50	5
39193	T30H	90	5
20224	T40H	50	5
39194	T40H	90	5

MagicRing® hex 1/4" E6,3

7043ZR

Order-No.		mm	
23145	3.0	50	5
23147	4.0	50	5
23149	5.0	50	5
23151	6.0	50	5

Hexagon 1/4" E6,3

7043Z

Order-No.		mm	
05301	1.5	50	5
05302	2.0	50	5
34554	2.0	70	5
39178	2.0	90	5
05303	2.5	50	5
34555	2.5	70	5
39179	2.5	90	5
04194	3.0	50	5
34556	3.0	70	5
39180	3.0	90	5
04195	4.0	50	5
34557	4.0	70	5
39181	4.0	90	5
04196	5.0	50	5
34558	5.0	70	5
39182	5.0	90	5
04197	6.0	50	5
34559	6.0	70	5
39183	6.0	90	5
04198	8.0	50	5
34560	8.0	70	5

TORX PLUS® 1/4" E6,3

7046Z

Order-No.		mm	
28481	5IP	50	5
26000	6IP	50	5
26002	7IP	50	5
23195	8IP	50	5
23197	9IP	50	5
23199	10IP	50	5
23201	15IP	50	5
23203	20IP	50	5
23205	25IP	50	5
23207	27IP	50	5
23209	30IP	50	5
23211	40IP	50	5

Torq-Set® 1/4" E6,3

7049ZOTTS

Order-No.		mm	
22596	4	50	5
22597	5	50	5
22598	6	50	5
22599	8	50	5
22600	10	50	5

Hexagonal ball end MagicRing® 1/4" E6,3

7047ZR

Order-No.		mm	
25739	3.0	50	5
25740	4.0	50	5
25741	5.0	50	5
25742	6.0	50	5

Bit set Professional



2-pcs. 50 mm 1/4“ E6,3 in box

Order-No. 

38676  2 x PH1 10

36193  2 x PH2 10

38677  2 x PH3 10

38679  2 x PZ1 10

38680  2 x PZ2 10

38681  2 x PZ3 10

38684  2 x T10 10

38685  2 x T15 10

38686  2 x T20 10

38687  2 x T25 10

38689  2 x T30 10

38690  2 x T40 10

2-pcs. 70 mm 1/4“ E6,3 in box

Order-No. 

38706  2 x PH1 10

38707  2 x PH2 10

38708  2 x PH3 10

38709  2 x PZ1 10

38710  2 x PZ2 10

38711  2 x PZ3 10

36086  2 x SL/PZ1 10

36082  2 x SL/PZ2 10

38712  2 x T10 10

38713  2 x T15 10

38714  2 x T20 10

38715  2 x T25 10

38717  2 x T30 10

Bit set Professional 70 mm**TORX® ball end 1/4" incl. bit band 11-pcs.**

7045BE9570

Order-No.



32804

1

- 2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T30
- 1 x Bit band

Micro-bit set ESD**Mixed 66-pcs. incl. box**

7000SK65ESD


Order-No.



39971

1

- ⊖ 1 x 0.8 mm / 1 x 1.2 mm / 1 x 1.5 mm / 1 x 1.8 mm /
1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 1 x 3.5 mm /
1 x 4.0 mm
- ⊕ 1 x 0.7 mm / 1 x 0.9 mm / 2 x 1.3 mm 0,05 / 1 x 1.5 mm
/ 1 x 2.0 mm / 1 x 2.5 mm / 1 x 3.0 mm / 2 x 4.0 mm
- 5/32" / 1 x 1/16" / 1 x 5/64" / 1 x 3/32" / 1 x 7/64" /
1 x 1/8" / 1 x 9/64"
- 1 x T3 / 1 x T4 / 1 x T5 / 1 x T6 / 1 x T7 / 1 x T8 / 1 x T9 /
1 x T10 / 1 x T15 / 1 x T20
- 1 x PL1 / 1 x PL2 / 1 x PL3 / 1 x PL4 / 1 x PL5 / 1 x PL6
- ⊕ 1 x PH000 / 1 x PH00 / 1 x PH0 / 1 x PH1
- ⊕ 1 x 5/64" / 1 x 3/32" / 1 x 7/64" / 1 x 1/8" / 1 x 9/64" /
1 x 5/32" / 1 x 3/16" / 1 x 7/32" / 1 x 2.0 mm /
1 x 2.5 mm / 1 x 3.0 mm / 1 x 3.5 mm / 1 x 4.0 mm /
1 x 4.5 mm / 1 x 5.0 mm / 1 x 5.5 mm
- 1 x Adapter 1/4" for micro-bits 4 mm drive
- 1 x Bit ratchet 90 mm with thumb wheel Hexagon head,
1/4"
- 1 x Screwdriver handle ESD for micro-bits 4 mm drive
- 1 x Extension 100 mm for micro-bits form 4 mm and Fine
screwdriver ESD
- 1 x Metal Box

**INFOBOX:
TORX® ball end**
**Wiha TORX® ball end**

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.

**INFOBOX:
Pentalobe**
**The security profile for Apple devices.**

- Ideal for repairing Apple smartphones, tablets and notebooks.
- Note: The guarantee and warranty conditions of the device manufacturer must be observed.

Micro-bit 28 mm

7005

TORX® drive C4 4 mm

Order-No.		mm	
40628	T1	28	10
40629	T2	28	10
40630	T3	28	10
40631	T4	28	10
40632	T5	28	10
40633	T6	28	10
40634	T7	28	10
40635	T8	28	10
40636	T9	28	10
40637	T10	28	10
40638	T15	28	10
40639	T20	28	10

Slotted drive C4 4 mm

7000Z

Order-No.		mm	
40600	0.8	28	0.2
40601	1.2	28	0.3
40602	1.5	28	0.3
40603	1.8	28	0.3
40604	2.0	28	0.4
40605	2.5	28	0.4
40606	3.0	28	0.5
40607	3.5	28	0.6
40608	4.0	28	0.8

Phillips drive C4 4 mm

7001

Order-No.		mm	
40609	PH000	28	10
40610	PH00	28	10
40611	PH0	28	10
40612	PH1	28	10
40613	PH2	28	10

Hexagon drive C4 4 mm

7003Z

Order-No.		mm	
40614	0.7	28	10
40615	0.9	28	10
40616	1.3	28	10
40617	1.5	28	10
40618	2.0	28	10
40619	2.5	28	10
40620	3.0	28	10
40621	4.0	28	10

Hexagon drive C4 4 mm

7003Z

Order-No.		mm	
40622	1/16"	28	10
40623	5/64"	28	10
40624	3/32"	28	10
40625	7/64"	28	10
40626	1/8"	28	10
40627	9/64"	28	10

Micro nut driver 30 mm**Hexagon socket drive form C4 4 mm**

7044Z

Order-No.	mm	mm	mm	
40654	2.0	30	10	
40655	2.5	30	10	
40656	3.0	30	10	
40657	3.5	30	10	
40658	4.0	30	10	
40659	4.5	30	10	
40660	5.0	30	10	
40661	5.5	30	10	

Bit holder magnetic**for micro-bits 4 mm drive**

7110

Order-No.	mm	mm	mm	mm	
32505	4.0	1/4"	60	10	

Hexagon socket drive form C4 4 mm

7044Z

Order-No.	mm	mm	mm	
40646	5/64"	30	10	
40647	3/32"	30	10	
40648	7/64"	30	10	
40649	1/8"	30	10	
40650	9/64"	30	10	
40651	5/32"	30	10	
40652	3/16"	30	10	
40653	7/32"	30	10	

Bit with thread**Phillips M4**

7311Z

Order-No.	mm	mm	mm	mm	mm	
01937	PH1	33	5.5	M4	8	10
01938	PH2	33	6	M4	8	10

Pozidriv M4

7312Z

Order-No.	mm	mm	mm	mm	mm	
01939	PZ1	33	5.5	M4	8	10
01940	PZ2	33	6	M4	8	10

Phillips M5

7321Z

Order-No.	mm	mm	mm	mm	mm	
01942	PH2	33	7	M5	8	10
01943	PH2	45	6	M5	8	10

Pozidriv M5

7322Z

Order-No.	mm	mm	mm	mm	mm	
01945	PZ2	33	7	M5	8	10
01946	PZ2	45	6	M5	8	10

TORX® M5

7325Z

Order-No.	mm	mm	mm	mm	mm	
35400	T10	45	6	M5	8	10
35401	T15	45	6	M5	8	10
35402	T20	45	6	M5	8	10
35403	T25	45	6	M5	8	10

Phillips M6

7331Z

Order-No.	mm	mm	mm	mm	mm	
04678	PH2	33	8	M6	8	10
04677	PH2	45	8	M6	8	10

for micro-bits form 4 mm and Fine screwdriver ESD

7103

Order-No.	mm	mm	mm	mm	
40663	4.0	4.0	100	10	

Adapter 1/4"**for micro-bits 4 mm drive**

7103

Order-No.	mm	mm	mm	mm	
39964	4.0 mm	1/4"	25	10	

Pozidriv M6

7332Z

Order-No.		mm			mm	
04671	PZ2	33	8	M6	8	10
04670	PZ2	45	8	M6	8	10

Phillips UNF 10/32"

7341Z

Order-No.		mm			mm	
01947	PH2	45	6	10/32 UNF	8	10

Combination drill bit set**1/4" 6-pcs. incl. box**

79187B5

Order-No.			
28026		1	
○	1 x M3 x 36 mm / 1 x M4 x 39 mm / 1 x M5 x 41 mm / 1 x M6 x 44 mm / 1 x M8 x 51 mm		
	1 x Box		

Combination drill bit**1/4"**

7807

Order-No.		mm			
27897	M3	36	1/4		10
27898	M4	39	1/4		10
27899	M5	41	1/4		10
27900	M6	44	1/4		10
27901	M8	51	1/4		10
27963	M10	65	1/4		10

Kegelsenker-Bit Set**6-tlg. 1/4" inkl. Box**

79186B5

Best.-Nr.		€/St.
28027	1	87,00
○	M3 x 35 mm / M4 x 35 mm / M5 x 35 mm / M6 x 35 mm / M8 x 35 mm	
	Box	

Kegelsenker-Bit**1/4"**

7806

Best.-Nr.		mm			Ø min.		€/St.
27892	6,3	35	1/4	M3	1,5	10	18,08
27893	8,3	35	1/4	M4	2	10	18,34
27894	10,4	35	1/4	M5	2,5	10	20,27
27895	12,4	35	1/4	M6	2,8	10	22,71
27896	16,5	35	1/4	M8	3,2	10	24,14
28058	20,5	35	1/4	M10	3,5	10	27,36



Socket-wrench insert 55 mm**Hexagon head 1/4" E6,3**

7044Z

Order-No.		mm	
04514	5.0	55	5
04513	5.5	55	5
04512	6.0	55	5
04511	7.0	55	5
04510	8.0	55	5
04509	10.0	55	5
04508	13.0	55	5

Tool shaft with ball**Square, Internal hexagon 1/4" C6,3**

7210

Order-No.			mm	
01933	1/4"	1/4"	25	5
04204	3/8"	1/4"	30	5

Nut driver insert magnetic 55 mm**Tool shaft****Hexagon head 1/4" E6,3**

7044M

Order-No.		mm	
04637	5.0	55	5
04636	5.5	55	5
04635	6.0	55	5
04634	7.0	55	5
04633	8.0	55	5
04632	10.0	55	5
04631	13.0	55	5

Square, Internal hexagon 1/4" E6,3

7240

Order-No.			mm	
01935	1/4"	1/4"	50	5
04362	3/8"	1/4"	50	5
04685	1/4"	1/4"	100	5
04684	3/8"	1/4"	100	5

Adapter DIN 7428.

Hexagon head 1/4" E6,3

7044M

Order-No.		mm	
04638	1/4"	55	5
04639	5/16"	55	5
04640	3/8"	55	5

Connector with retaining ring**Hexagon head, Square head form G 6.3 + G 10 + G 12.5**

7201

Order-No.				mm	
01924	1/4	1/4	25	2	
01926	1/4	3/8	30	2	
01922	1/4	1/2	35	2	
01927	5/16	3/8	30	2	
01923	5/16	1/2	35	2	

Connector with quick release holder**Hexagon head, Square head form G 12.5**

7201

Order-No.				mm	
01930	1/2	1/4	2		

Hand impact screwdriver set**Mixed, 7-pcs. incl. box, 1/2"**

24636B5

Order-No.	
32573	1
	1 x Hand impact screwdriver Internal square 1/2"
	1 x Bit for hand impact screwdriver - Slotted form C 8 (5/16") 9 /
	1 x Bit for hand impact screwdriver - Slotted form C 8 (5/16") 11
	1 x Bit for hand impact screwdriver - Phillips form C 8 (5/16") PH2 /
	1 x Bit for hand impact screwdriver - Phillips form C 8 (5/16") PH3
	1 x Heavy-duty bit holder clamping with ball Hexagon head, Square head 1/2"
	1 x Metal Box

Hand impact screwdriver**Internal square 1/2"**

24636

Order-No.			mm	
32556	1/2"	163		1

Heavy-duty bit holder clamping with ball**Hexagon head, Square head 1/2"**

7204Z

Order-No.				mm	
32547	5/16"	1/2	38		5

Bit holder CentroFix Force mechanically lockable**1/4", magnetic in box**

7148CF

Order-No.			mm	SB	(L)
39133	1/4"	1/4"	60	-	10

Bit holder CentroFix mechanically lockable**1/4" in box**

7148

Order-No.			mm	SB	(L)
32477	1/4"	1/4"	60	-	10

Bit holder CentroFix Super Slim mechanically lockable**1/4" in box**

7148CS

Order-No.			mm	SB	(L)
39134	1/4"	1/4"	66	-	10

Bit holder MagicFlip Force magnetic**with ring magnet, 1/4" in box**

7123

Order-No.			mm	SB	(L)
36800	1/4"	1/4"	62	-	10

INFOBOX:
Drive systems and matching bits
**Bit holder**

Bit holder	suitable for
CentroFix Force	C 6.3, E 6.3 and 1/4" drives
CentroFix SuperSlim	C 6.3
MagicFlip Force	C 6.3

INFOBOX:
CentroFix Force


- CentroFix Force
- Suitable for all bits with 1/4" hex drive style C6.3 and E6.3.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

INFOBOX:
CentroFix SuperSlim


- Up to 30% reduced outer diameter compared to "conventional" quick release holders.
- Improved screw accessibility in confined holes.
- SelfLock: The bit is locked mechanically and held securely when inserted.
- EasyOut: When unlocked, the bit moves into the ideal removal position.

Bit holder magnetic, clamping with retaining ring



1/4"

Order-No.	mm	7143
01913	72	2
36092	100	5
34306	150	5
36093	200	5
36094	250	5

Bit holder magnetic 60 mm



1/4" extra strong magnet in box

Order-No.	mm	7113P
41922	60	6

Bit holder clamping with retaining ring



1/4"

Order-No.	mm	7140
01910	57	5

Bit holder magnetic 58 mm



1/4"

Order-No.	mm	7113S
01895	58	10
07869	58	10

Bit holder magnetic 74 mm



1/4"

Order-No.	mm	7113
01894	74	10

Universal holder, magnetic/ retaining ring, style G 7.



INFOBOX: MagicFlip Force



- Facilitates the fastening of long wood screws.
- Optimal holding force thanks to extremely powerful Neodym ring magnet.
- FlipBack: The actuating sleeve automatically springs back during recessing.
- Magnet On/Off: The ring magnet can be "deactivated" by pushing the actuating sleeve back.

Industrial bit holder, with magnet, Halfmoon 4 mm.



7110H

Order-No.	mm	7110H
36112	50	10

Screwdriver with bit holder SoftFinish® magnetic**Screwdriver with SoftFinish® CentroFix bit holder, mechanically lockable****1/4"**

384

Order-No.	Ø	mm	inch	mm	inch
01475	1/4"	125	243	36	10
01476	1/4"	300	418	36	5

1/4"

387

Order-No.	Ø	mm	inch	mm	inch
40331	1/4"	38	149	36	10

Screwdriver with bit holder SoftFinish® clamping with retaining ring**Screwdriver with bit holder SoftFinish® magnetic****Flexible shaft, 1/4"**

386

Order-No.	Ø	mm	inch	mm	inch
01479	1/4"	150	265	36	10

1/4"

281

Order-No.	Ø	mm	inch	mm	inch
32160	1/4"	112	120	36	10

Screwdriver with SoftFinish® bit holder, quick release holder**Screwdriver with bit holder magnetic****1/4"**

387

Order-No.	Ø	mm	inch	mm	inch
25874	1/4"	35	146	30	10

Stubby, 1/4"

281

Order-No.	Ø	mm	inch	mm	inch
29463	1/4"	57	65	34	10

Screwdriver with bit holder ESD**Stubby, 1/4" magnetic**

281

Order-No. mm

32484 1/4" 57 65 34 10

Screwdriver with T-handle and bit holder magnetic**1/4"**

388

Order-No. mm

01481 1/4" 150 80 10

Screwdriver with T-handle and two bit holders ComfortGrip magnetic**1/4"**

388DS

Order-No. mm

26179 1/4" 150 100 10

**1/4"**

387

Order-No. mm

32161 1/4" 38 148 30 10

High-performance offset screwdriver with quick release holder 1/4"**1/4" in blister pack**

24628

Order-No. mm

32310 1/4" 1/4" 165 57.0 1

Screwdriver handle, PicoFinish® ESD magnetic**For 4 mm MicroBits**

281P

Order-No. mm

43709 4.0 96 10

Offset screwdriver with bit holder magnetic**1/4" in blister pack**

24629

Order-No. mm

32311 1/4" 1/4" 130 14.0 1



Mechanical Tools

Tight fastening – easy opening.

Opening tightly fastened screws requires great force. With the leverage action from Wiha's ring ratchet open-ended spanner, the user can easily open any fastening. The jaw end is also excellently suited for tightening screws and nuts. Similarly, when working with the ring ratchet, the user benefits from the fine toothing with 72 teeth, offering a short return angle and highest comfort when working in confined spaces due to the double hex design.

The combination of all standard nut driver sizes and various bits in a sorting system based on the L Boxx, accommodates all work activities and easy mobility.

Made of high quality chrome vanadium steel, the mechanical tools are distinguished by their longevity and robustness, not the least thanks to their corrosion-resistant and easy to clean surface.

Application

Mechanical Tools

For applications in mechanics

**Nut driver and bit set
1/4" and 1/2"
60 pcs. incl. L Boxx**
Page 266



**Nut driver and bit set 1/4" 40 pcs. incl.
multifunctional bag with belt clip**
Page 267



**Ratchet wrench set,
1/4"**
17 pcs. incl foam insert
Page 268



**Ratchet wrench set,
1/2"**
26 pcs. incl foam insert
Page 269



**Ratchet wrench set,
3/8"**
23 pcs. incl foam insert
Page 268



**Ring ratchet open-ended spanner set
13 pcs. switchable, with holder**
Page 270



**Ring ratchet open-ended spanner set
13 pcs. with holder**
Page 270



**Ring ratchet open-ended spanner set
8 pcs. with holder**
Page 271



**Double open-end
spanner set
13 pcs. with holder**
Page 271



Nut driver and bit set 1/4" and 1/2"



1/2"

1/4"

60 pcs. incl. L Boxx

33397

Order-No.

33397

44685

1

- Ratchet wrench for nut drivers 1/4" switchable 1/4" x 128 mm (44666) / 1/2" x 257 mm (44709)
- Nut driver insert 1/4" hexagon head 4.0 mm (44669) / 5.0 mm (44670) / 5.5 mm (44671) / 6.0 mm (44672) / 7.0 mm (44673) / 8.0 mm (44674) / 9.0 mm (44675) / 10.0 mm (44676) / 11.0 mm (44678) / 12.0 mm (44679) / 13.0 mm (44680) / 14.0 mm (44681)
- Nut driver insert 1/2" double hex 10.0 mm (44715) / 11.0 mm (44716) / 12.0 mm (44717) / 13.0 mm (44718) / 14.0 mm (44719) / 15.0 mm (44720) / 16.0 mm (44721) / 17.0 mm (44722) / 18.0 mm (44723) / 19.0 mm (44724) / 21.0 mm (44726) / 22.0 mm (44727) / 24.0 mm (44729) / 27.0 mm (44732) / 30.0 mm (44735) / 32.0 mm (44737) / 34.0 mm (44738)
- Extension 1/4" for nut driver inserts 75 mm (44667) / 150 mm (44668)
- Extension 1/2" for nut driver inserts 150 mm (44711) / 250 mm (44712)
- Universal joint with ball Internal square, square head 1/4" (44682) / 1/2" (44739)
- Screwdriver with bit holder SoftFinish® magnetic 1/4" 112 mm (32160)
- Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box 60 mm (39133)
- Bit Standard 25 mm Slotted 1/4" C6,3 4.5 mm (01623) / 5.5 mm (01624) / 6.5 mm (01626)
- Bit Standard 25 mm Phillips 1/4" C6,3 PH1 (01657) / PH2 (01658)
- Bit Standard 25 mm Pozidriv 1/4" C6,3 PZ1 (01688) / PZ2 (01689) / PZ3 (01690)
- Bit Standard 25 mm TORX® 1/4" C6,3 T10 (01716) / T15 (01717) / T20 (01718) / T25 (01719) / T27 (01720) / T30 (01721) / T40 (01722)
- Bit Standard 25 mm Hexagon 1/4" C6,3 3.0 mm (01705) / 4.0 mm (01706) / 5.0 mm (01707) / 6.0 mm (01708)
- Tool shaft with ball Square, Internal hexagon 1/4" C6,3 (01933)

L-BOXX

Based on DIN 3124

Nut driver and bit set 1/4"



1/4"

40 pcs. incl. multifunctional bag with belt clip

33394

Order-No.



44684

1

- Ratchet wrench for nut drivers 1/4" switchable 128 mm (44666)
- Nut driver insert 1/4" hexagon head 4.0 mm (44669) / 4.5 mm (44677) / 5.0 mm (44670) / 5.5 mm (44671) / 6.0 mm (44672) / 7.0 mm (44673) / 8.0 mm (44674) / 9.0 mm (44675) / 10.0 mm (44676) / 11.0 mm (44678) / 12.0 mm (44679) / 13.0 mm (44680) / 14.0 mm (44681)
- Extension 1/4" for nut driver inserts 75 mm (44667) / 150 mm (44668)
- Universal joint with ball Internal square, square head 1/4" (44682)
- Screwdriver with bit holder SoftFinish® magnetic 1/4" 112 mm (32160)
- Bit holder CentroFix Force mechanically lockable 1/4", magnetic in box 60 mm (39133)
- Bit Standard 25 mm Slotted 1/4" C6,3 4.5 mm (01623) / 5.5 mm (01624) / 6.5 mm (01626)
- Bit Standard 25 mm Phillips 1/4" C6,3 PH1 (01657) / PH2 (01658)
- Bit Standard 25 mm Pozidriv 1/4" C6,3 PZ1 (01688) / PZ2 (01689) / PZ3 (01690)
- Bit Standard 25 mm TORX® 1/4" C6,3 T10 (01716) / T15 (01717) / T20 (01718) / T25 (01719) / T27 (01720) / T30 (01721) / T40 (01722)
- Bit Standard 25 mm Hexagon 1/4" C6,3 3.0 mm (01705) / 4.0 mm (01706) / 5.0 mm (01707) / 6.0 mm (01708)
- Tool shaft with ball Square, Internal hexagon 1/4" C6,3 (01933)
- Tool Belt Pouch

Based on DIN 3124



Ratchet wrench set, 1/4"**Ratchet wrench set, 3/8"****1/4"****3/8"****17 pcs. incl foam insert**

33391

Order-No.



44683

1

- Ratchet wrench for nut drivers 1/4" switchable 128 mm (44666)
- Nut driver insert 1/4" hexagon head 4.0 mm (44669) / 4.5 mm (44677) / 5.0 mm (44670) / 5.5 mm (44671) / 6.0 mm (44672) / 7.0 mm (44673) / 8.0 mm (44674) / 9.0 mm (44675) / 10.0 mm (44676) / 11.0 mm (44678) / 12.0 mm (44679) / 13.0 mm (44680) / 14.0 mm (44681)
- Extension 1/4" for nut driver inserts 75 mm (44667) / 150 mm (44668)
- Foam insert

Based on DIN 3124

23 pcs. incl foam insert

33791

Order-No.



44708

1

- Ratchet wrench for nut drivers 3/8" switchable 178 mm (44686)
- Nut driver insert 3/8" double hex 6.0 mm (44690) / 7.0 mm (44691) / 8.0 mm (44692) / 9.0 mm (44693) / 10.0 mm (44694) / 11.0 mm (44695) / 12.0 mm (44696) / 13.0 mm (44697) / 14.0 mm (44698) / 15.0 mm (44699) / 16.0 mm (44700) / 17.0 mm (44701) / 18.0 mm (44702) / 19.0 mm (44703) / 20.0 mm (44704) / 21.0 mm (44705) / 22.0 mm (44706) / 24.0 mm (44707)
- Extension 3/8" for nut driver inserts 75 mm (44687) / 150 mm (44688) / 250 mm (44689)
- Foam insert

Based on DIN 3124

Ratchet wrench set, 1/2"



1/2"

26 pcs. incl foam insert

33891

Order-No.



44740

1

Ratchet wrench for nut drivers 1/2" switchable 257 mm (44709)

Nut driver insert 1/2" double hex 8.0 mm (44713) / 9.0 mm (44714) / 10.0 mm (44715) / 11.0 mm (44716) / 12.0 mm (44717) / 13.0 mm (44718) / 14.0 mm (44719) / 15.0 mm (44720) / 16.0 mm (44721) / 17.0 mm (44722) / 18.0 mm (44723) / 19.0 mm (44724) / 20.0 mm (44725) / 21.0 mm (44726) / 22.0 mm (44727) / 23.0 mm (44728) / 24.0 mm (44729) / 25.0 mm (44730) / 26.0 mm (44731) / 27.0 mm (44732) / 28.0 mm (44733)

Extension 1/2" for nut driver inserts 75 mm (44710) / 150 mm (44711) / 250 mm (44712)

Foam insert

Based on DIN 3124



Ring ratchet open-ended spanner set**13 pcs. switchable, with holder**

303190

Order-No.



44661

1

Ring ratchet open-end spanner Switchable 8 mm x 8 mm (44641) / 9 mm x 9 mm (44642) / 10 mm x 10 mm (44644) / 11 mm x 11 mm (44645) / 12 mm x 12 mm (44646) / 13 mm x 13 mm (44647) / 14 mm x 14 mm (44648) / 15 mm x 15 mm (44789) / 16 mm x 16 mm (44649) / 17 mm x 17 mm (44650) / 18 mm x 18 mm (44651) / 19 mm x 19 mm (44652)

holder

Based on DIN 3113

Ring ratchet open-ended spanner set**13 pcs. with holder**

30391

Order-No.



44665

1

Ring ratchet open-end spanner 8 mm x 8 mm (44638) / 9 mm x 9 mm (44639) / 10 mm x 10 mm (44640) / 11 mm x 11 mm (44643) / 12 mm x 12 mm (44653) / 13 mm x 13 mm (44654) / 14 mm x 14 mm (44655) / 15 mm x 15 mm (44656) / 16 mm x 16 mm (44657) / 17 mm x 17 mm (44658) / 18 mm x 18 mm (44659) / 19 mm x 19 mm (44660)

holder

Based on DIN 3113

Ring ratchet open-ended spanner set**8 pcs. with holder**

Order-No.

44664

30390

Ring ratchet open-end spanner 9 mm x 9 mm (44639) /
10 mm x 10 mm (44640) / 11 mm x 11 mm (44643) /
12 mm x 12 mm (44653) / 13 mm x 13 mm (44654) /
14 mm x 14 mm (44655) / 15 mm x 15 mm (44656)

holder

Based on DIN 3113

**Double open-end spanner set****13 pcs. with holder**

Order-No.

44753

37390

Double open-end spanner set 6 mm x 7 mm (44741) /
8 mm x 9 mm (44742) / 10 mm x 11 mm (44743) /
12 mm x 13 mm (44744) / 14 mm x 15 mm (44745) /
16 mm x 17 mm (44746) / 18 mm x 19 mm (44747) /
20 mm x 22 mm (44748) / 21 mm x 23 mm (44749) /
24 mm x 27 mm (44750) / 25 mm x 28 mm (44849) /
30 mm x 32 mm (44752)

holder

Based on DIN 3110





Pliers

A cut above the rest for your health.

Wiha pliers combine high-quality materials with ergonomic comfort. Precise interaction between the joints and the exact workmanship of the blades and gripping surfaces ensure optimum functionality. Ergonomically designed and crafted to a high quality standard, they are comfortable to use, causing less body fatigue and thus making work more efficient.

The "OptiGrip" triple-point support design for combination and high-leverage combination pliers ensure an optimum, secure hold when handled. The circlip pliers from the Classic Series with their MagicTips® precision tips made of high-performance steel provide added safety and stability. With its angled plier shape, the Wiha Inomic® VDE product line is kind to the user's joints, muscles and tendons. Wiha also supplies suitable tools for stripping, skinning and crimping.

Application

Pliers

For applications in electrics

Installation pliers TriCut
Professional electric
1/4" in blister pack
Page 275



Needle nose pliers
Professional electric
with cutting edge
straight shape
Page 279



Automatic crimp tool
For wire-end sleeves square
crimping with rotating
crimping head
Page 287



Professional BiCut®
high-performance
diagonal cutters with
DynamicJoint®
Switchable
Page 276



Hacksaw electric
insulated with three
saw blades 150 mm
Page 285



Stripping tool automatic
up to 16 mm² in blister
pack
Page 284



Industrial electric
heavy-duty diagonal
cutters with
DynamicJoint®
with switchable opening
spring
Page 277



Combination pliers
Professional electric
with DynamicJoint® and
OptiGrip
with extra long cutting
edge
Page 278



For applications in mechanics

Professional BiCut®
high-performance
diagonal cutters with
DynamicJoint®
Switchable
Page 291



Heavy-duty diagonal
cutters Professional
with DynamicJoint®
with switchable opening
spring
Page 292



Combination pliers
Professional with
DynamicJoint® and
OptiGrip
with extra long cutting
edge
Page 294



Needle-nose pliers
Professional
with cutting edge
curved shape, approx.
40°
Page 296



Plastic diagonal cutters
Classic
with opening spring
without bevelled edge
Page 297



Pliers wrench Classic
Page 300



For applications in electronics

Pliers set Professional
ESDDiagonal cutters,
oblique end cutting
nippers, needle nose
pliers 4-pcs.
Page 308



Professional ESD
needle nose pliers
straight
Page 312



Universal tweezers
Professional ESD
Type AA
Page 313



Electronic needle nose
pliers
narrow, short head
straight form
Page 317



Pliers set Professional electric**Combination pliers, needle nose pliers, diagonal cutters 3-pcs.**

Z99000106

Order-No.



26852

1

Trimming / cutting

- Professional electric diagonal cutters with DynamicJoint®
160 mm, 6 1/2" (43335)

Supplying / holding

- Combination pliers Professional electric with
DynamicJoint® and OptiGrip with extra long cutting edge
180 mm, 7" (26708)

- Needle nose pliers Professional electric with cutting edge
straight shape 200 mm, 8" (26727)

Manufactured acc. to IEC 60900.

Pliers set Industrial electric**Combination pliers, needle nose pliers, diagonal cutters 3-pcs.**

Z99000109

Order-No.



38637

1

Trimming / cutting

- Industrial electric diagonal cutters with DynamicJoint®
160 mm, 6 1/2" (43336)

Supplying / holding

- High-leverage industrial electric combination pliers with
DynamicJoint® and OptiGrip with extra long cutting edge
180 mm, 7" (33186)

- Industrial electric needle nose pliers with cutting edge
straight shape 200 mm, 8" (33178)

Manufactured acc. to IEC 60900.

Cutting capacity info**Example**

1 - 5	copper, aluminium
6 - 10	Iron nails
11 - 15	Screws
16 - 21	Hardened spring steel

Installation pliers TriCut Professional electric



Installation pliers TriCut Classic



Z 14 1 06

Order-No.	mm	"	13	Ø mm	SB	(H)
38552	170	7"	13	1.6	-	5
38853	170	7"	13	1.6	x	5

Manufactured acc. to IEC 60900.

Z 14 1 01

Order-No.	mm	"	13	Ø mm	SB	(H)
38627	170	7"	13	1.6	-	5
38854	170	7"	13	1.6	x	5

INFOBOX: VDE-certified tools



Wiha VDE-tested tools are subject to stringent safety test procedures.

All tools with the special marking have been tested at 10,000 V AC and are therefore approved for use at 1,000 V AC and 1,500 V DC.

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components

Certified by the VDE Testing and Certification Institute and individually tested according to the international standard IEC 60900.



Stripping diagonal cutters Professional electric with DynamicJoint®



Z 14 0 06

Order-No.	mm	in			Ø mm		SB	
26745	160	6 1/2"			1.6	-	5	
27431	160	6 1/2"			1.6	x	5	

Manufactured acc. to IEC 60900.

Professional electric diagonal cutters with DynamicJoint®




Z 12 1 06

Order-No.	mm	in			Ø mm		SB	
43326	140	5 1/2"			16	1.6	-	5
43453	140	5 1/2"			16	1.6	x	5
43335	160	6 1/2"			17	2	-	5
43458	160	6 1/2"			17	2	x	5
43340	180	7"			18	2.3	-	5
43463	180	7"			18	2.3	x	5

Manufactured acc. to IEC 60900.

Professional BiCut® high-performance diagonal cutters with DynamicJoint®



Switchable

Z 18 0 06

Order-No.	mm	in			Ø mm		SB	
38191	200	8"			21	3	-	5
38984	200	8"			21	3	x	5

Manufactured acc. to IEC 60900.

Industrial electric diagonal cutters with DynamicJoint®



Z 12 1 09

Order-No.	mm	in			Ø mm		SB	
43327	140	5 1/2"			16	1.6	-	5
43454	140	5 1/2"			16	1.6	x	5
43336	160	6 1/2"			17	2	-	5
43459	160	6 1/2"			17	2	x	5
43341	180	6"			18	2.3	-	5
43464	180	7"			18	2.3	x	5

Manufactured acc. to IEC 60900.

Heavy-duty diagonal cutters Professional electric with DynamicJoint®



with switchable opening spring

Z 16 3 06

Order-No.	mm	in	mm	mm	SB	mm
41309	160	6 1/2"	17	2	x	5
40921	160	6 1/2"	17	2	-	5
41319	180	7"	18	2.3	x	5
41274	180	7"	18	2.5	-	5
41329	200	8"	19	2.8	x	5
41279	200	8"	19	2.8	-	5

Manufactured acc. to IEC 60900.

Industrial electric heavy-duty diagonal cutters with DynamicJoint®



with switchable opening spring

Z 16 3 09

Order-No.	mm	in	mm	mm	SB	mm
40922	160	6 1/2"	17	2	-	5
41310	160	6 1/2"	17	2	x	5
41275	180	7"	18	2.5	-	5
41320	180	7"	18	2.5	x	5
41280	200	8"	19	2.8	-	5
41330	200	8"	19	2.8	x	5

Manufactured acc. to IEC 60900.

**INFOBOX:
DynamicJoint®**



Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

**INFOBOX:
Heavy-duty diagonal cutters**



with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free work.
- Opening spring can be activated with just one hand.

Combination pliers Professional electric with DynamicJoint® and OptiGrip




with extra long cutting edge

Z 01 0 06

Order-No.	mm	"	+	Q mm	SB	H
26705	160	6 1/2"	15	1.6	-	5
27328	160	6 1/2"	15	1.6	x	5
26708	180	7"	16	1.8	-	5
27418	180	7"	16	1.8	x	5
26711	200	8"	17	2	-	5
27419	200	8"	17	2	x	5

Manufactured acc. to IEC 60900.

Combination pliers Professional electric with DynamicJoint® and OptiGrip



with extra long cutting edge

Z 02 0 06

Order-No.	mm	"	+	Q mm	SB	H
26714	200	8"	18	2.3	-	5
27420	200	8"	18	2.3	x	5
26717	225	9"	19	2.5	-	5
27421	225	9"	19	2.5	x	5

Manufactured acc. to IEC 60900.

High-leverage industrial electric combination pliers with DynamicJoint® and OptiGrip




with extra long cutting edge

Z 01 0 09

Order-No.	mm	"	+	Q mm	SB	H
33186	180	7"	16	1.8	-	5
38855	180	7"	16	1.8	x	5

Manufactured acc. to IEC 60900.

High-leverage industrial electric combination pliers with DynamicJoint® and OptiGrip

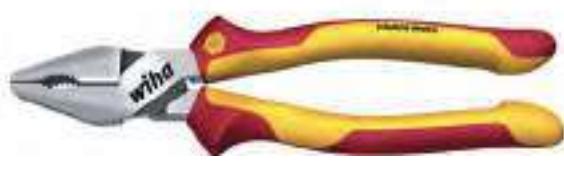

with extra long cutting edge

Z 02 0 09

Order-No.	mm	"	+	Q mm	SB	H
35465	225	9"	19	2.5	-	5
38856	225	9"	19	2.5	x	5

Manufactured acc. to IEC 60900.

Industrial lineman's pliers with DynamicJoint®



with extra long cutting edge

Z 02 2 02

Order-No.	mm	in		Ø mm	SB	
40927	250	10"		20	2.5	- 5

Needle nose pliers Professional electric



Z 05 0 06

with cutting edge straight shape

Order-No.	mm	in		Ø mm	SB	
26720	160	6 1/2"		16	1.2	- 5
27422	160	6 1/2"		16	1.2	x 5
26727	200	8"		17	1.6	- 5
27423	200	8"		17	1.6	x 5

Manufactured acc. to IEC 60900.

Industrial electric needle nose pliers




Z 05 0 09

with cutting edge straight shape

Order-No.	mm	in		Ø mm	SB	
35477	160	6 1/2"		16	1.2	- 5
38857	160	6 1/2"		16	1.2	x 5
33178	200	8"		17	1.6	- 5
38858	200	8"		17	1.6	x 5

Manufactured acc. to IEC 60900.

INFOBOX: OptiGrip



Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.



Needle nose pliers Professional electric



with cutting edge curved shape, approx. 40°

Z 05 1 06

Order-No.	mm	"		Ø mm	SB	
26728	160	6 1/2"	16	1.2	-	5
27424	160	6 1/2"	16	1.2	x	5
26729	200	8"	17	1.6	-	5
27425	200	8"	17	1.6	x	5

Manufactured acc. to IEC 60900.



Z 07 0 06

Order-No.	mm	"		SB	
26732	160	6 1/2"		-	5
27426	160	6 1/2"		x	5

Manufactured acc. to IEC 60900.



Industrial electric needle nose pliers



with cutting edge curved shape, approx. 40°

Z 05 1 09

Order-No.	mm	"		Ø mm	SB	
35462	200	8"	17	1.6	-	5
38859	200	8"	17	1.6	x	5

Manufactured acc. to IEC 60900.



Z 09 0 06

Order-No.	mm	"		SB	
26735	160	6 1/2"		-	5
27427	160	6 1/2"		x	5

Manufactured acc. to IEC 60900.



Cable cutter Professional electric**Cable cutter Classic****with switchable opening spring**

Z 50 3 06

Order-No.	mm	"	mm²	SB	EN
43660	180	7"	50	-	5
43664	180	7"	50	x	5
43662	210	8 1/4"	60	-	5
43666	210	8 1/4"	60	x	5

Z 50 2 01

Order-No.	mm	"	mm²	SB	EN
43538	180	7"	16	50	- 5
43544	180	7"	16	50	x 5
43541	210	8 1/4"	20	60	- 5
43547	210	8 1/4"	20	60	x 5

Manufactured acc. to IEC 60900.

Industrial electric cable cutter**with switchable opening spring**


Z 50 3 09

Order-No.	mm	"	mm²	SB	EN
43661	180	7"	50	-	5
43665	180	7"	50	x	5
43663	210	8 1/4"	60	-	5
43667	210	8 1/4"	60	x	5

Manufactured acc. to IEC 60900.



Plier wrench Professional electric

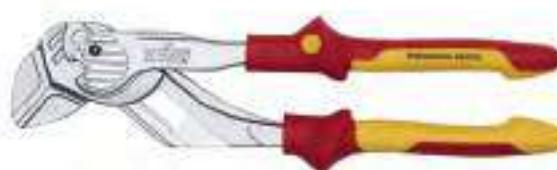

1000 V
IEC 60900

Z 25 0 06

Order-No.	mm	in	Ø:	Ø:	SB	(B)
44314	250	10"	46 mm	5	-	

Manufactured acc. to IEC 60900.

Stripping pliers Professional electric



1000 V
IEC 60900



Z 55 0 06

Order-No.	mm	in	Ø:	Ø mm	mm²	SB	(B)
26847	160	6 1/2"	5	10	-	5	
27437	160	6 1/2"	5	10	x	5	

Manufactured acc. to IEC 60900.

Professional electric water pump pliers



1000 V
IEC 60900

Z 21 0 06

Order-No.	mm	in	Ø:	Ø:	SB	(B)
33520	250	10"	2"	50 mm	-	5
38631	250	10"	2"	50 mm	x	5

Z 55 0 09

Order-No.	mm	in	Ø:	Ø mm	mm²	SB	(B)
36711	160	6 1/2"	5	10	-	5	
38867	160	6 1/2"	5	10	x	5	

Manufactured acc. to IEC 60900.

Water pump pliers Professional electric



1000 V
IEC 60900

Z 22 0 06

Order-No.	mm	in	Ø:	Ø:	SB	(B)
37450	250	10"	2"	50	-	5
38632	250	10"	2"	50	x	5

Manufactured acc. to IEC 60900.


Professional stripping pliers



Z 55 0 05

Order-No.	mm*	in	Ø mm	mm ²	SB	EN
26846	160	6 1/2"	5	10	-	5

Stripping pliers Industrial



Z 55 0 02

Order-No.	mm*	in	Ø mm	mm ²	SB	EN
32345	160	6 1/2"	5	10	-	5
34313	160	6 1/2"	5	10	x	5

Stripping pliers Classic



Z 55 0 01

Order-No.	mm*	in	Ø mm	mm ²	SB	EN
26845	160	6 1/2"	5	10	-	5
27368	160	6 1/2"	5	10	x	5

Stripping tool automatic



up to 16 mm² in blister pack

Z 57 0 06

Order-No.	mm	mm	Ø mm	AWG	SB	
42062	200	8"	0.03 - 16	32 - 5	x	1



Automatic stripping tool



up to 6 mm²

Z 57 5 06

Order-No.	mm	mm	Ø mm	AWG	SB	
44617	190	7 1/2"	0.2 - 6	24 - 10	x	1

Stripping tool with self-rotating drag blade



for round cable

Z 72 0 06

Order-No.	mm	mm	Ø mm	SB	
44618	165	6 1/2"	4 - 28	-	1
44619	165	6 1/2"	4 - 28	x	1



Spare blade and gripping jaw set




for automatic stripping tool (42062)

Z 57000106K

Order-No.		
42162		2

INFOBOX: Stripping tool, automatic up to 16mm²



- These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.
- The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.
- Precise cutting to length thanks to adjustable longitudinal stop.
- Integrated hand protection along the cutting edge guards against injury.

Stripping tool with self-rotating drag blade**for round cable**

Z 72 0 06

Order-No.	mm	in	Ø mm	SB	
44240	130	5 1/8"	4 - 28	x	1

Hacksaw electric**insulated with three saw blades 150 mm**

246176

Order-No.	mm	in	SB	
43125	150	280	x	1

Stripping tool**for round cable**

Z 73 0 06

Order-No.	mm	in	Ø mm	SB	
44620	140	5 1/2"	6 - 13	x	1

Cable stripping knife**straight cutting edge for round cables in blister pack**

24680

Order-No.	mm	in	SB	
38798	200	8"	x	1

Manufactured acc. to IEC 60900.

Stripping and assembly tool**for coaxial cable with F-connector**

Z 73 2 06

Order-No.	mm	in	Ø mm	SB	
44241	125	5"	6 - 8	x	1

Cable stripping knife**hooked blade with sliding shoe for round cable, in blister pack**

24678

Order-No.	mm	in	SB	
36053	200	8"	x	1

Manufactured acc. to IEC 60900.

Stripping multi-tool**for round cable**

Z 74 0 06

Order-No.	mm	in	Ø mm	AWG	SB	
44242	125	5"	0.5 - 6	20 - 10	x	1



Classic crimping pliers



Z 60 0 01						
Order-No.	mm	in	mm ²	SB		
28330	145	5 3/4"	0.25 - 2.5	-	5	
30066	180	7"	0.25 - 16	-	5	

Crimping pliers Professional electric



1000 V
IEC 60900

Z 60 0 06						
Order-No.	mm	in	mm ²	SB		
35862	180	7"	0.25 - 16	-	5	
38986	180	7"	0.25 - 16	x	5	

Manufactured acc. to IEC 60900.

Crimping pliers Professional electric



1000 V
IEC 60900

Z 60 0 06						
for wire-end sleeves hex crimping	Order-No.	mm	Ø mm	AWG		
	41246	210	0.08 - 16	28 - 5	1	
For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 & EN 50027						

Manufactured acc. to IEC 60900.

Order-No.	mm	Ø mm	AWG	
35861	145	5 3/4"	0.25 - 2.5	5

For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 & EN 50027

Automatic crimp tool



For wire-end sleeves square crimping with rotating crimping head

Z 62 0 06

Order-No.	mm*	Ø mm	AWG	SB	Box
45223	193	0.08 - 16	28 - 5	1	

For processing wire-end sleeves with and without insulating collar as per DIN 46228, EN 50027.

Crimping tools



for insulated terminals and connectors

Z 62 0 06

Order-No.	mm*	Ø mm	AWG	Box
33841	220	0.5 - 6	20 - 10	1

For processing of red, blue and yellow isolated terminals, pin-end terminals, contact pins, contact pin sleeves, circular pins, circular pin sleeves, batch connectors and parallel connectors according to DIN 46234.

Crimping tools



Crimping tools



for wire-end sleeves

Z 62 0 06

Order-No.	mm*	Ø mm	AWG	SB	Box
33844	220	0.14 - 16	26 - 5	-	1
40342	220	0.14 - 16	26 - 5	X	1

For processing wire-end sleeves with and without insulating collar as per DIN 46228, EN 50027.

for non-insulated cable eye with closed sleeve

Z 62 0 06

Order-No.	mm*	Ø mm	AWG	Box
33843	220	0.1 - 16	26 - 6	1

For processing of non-insulated cable eyes, pin-end cable connectors, batch connectors and mini cable eyes according to DIN 46234/ DIN 46230/ DIN 46341.



Crimping tools**for non-insulated male blade connectors**

Z 62 0 06

Order-No.	mm	Ø mm	AWG	
33842	220	0.25 - 6	24 - 10	1

For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.

**Craftsman's cutters****with crimp function in blister pack**

Z 71 7 06

Order-No.	mm	mm ²	
41923	160	50	5

Pliers set Classic**High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs.**

Z 99000201

Order-No.		
26853		1
	Combination pliers Classic with DynamicJoint® and OptiGrip with extra long cutting edge 200 mm, 8" (26712)	
	Heavy-duty diagonal cutters Classic with DynamicJoint® 180 mm, 7" (41261)	
	Water pump pliers QuickFix Classic automatic 250 mm, 10" (39091)	

Craftsman's cutters**Standard model made of stainless steel**

Z 71 5 06

Order-No.	mm	in	
29420	145	5 3/4"	5

Pliers set Classic**Combination pliers, needle nose pliers, diagonal cutters 3-pcs.**

Z99000101

Order-No.



26850

1

Combination pliers Classic with DynamicJoint® and OptiGrip with extra long cutting edge 180 mm, 7" (26706)



Diagonal cutters Classic with DynamicJoint® 160 mm, 6 1/2" (4332)



Classic needle nose pliers with cutting edge straight shape 160 mm, 6 1/2" (26718)

Pliers set Professional**High-leverage combination pliers, water pump pliers, heavy-duty diagonal cutters, 3-pcs.**

Z99000205

Order-No.



26854

1

Combination pliers Professional with DynamicJoint® and OptiGrip with extra long cutting edge 200 mm, 8" (26713)



Heavy-duty diagonal cutters Professional with DynamicJoint® with switchable opening spring 180 mm, 7" (41273)



Water pump pliers QuickFix Professional automatic 250 mm, 10" (39093)



Pliers set Classic with MagicTips®



Pliers set Classic



Circlip pliers 4-pcs.

Z99000701

Order-No.



34708

1

Supplying / holding

- Circlip pliers Classic with MagicTips® For inner rings (drill holes) J 1, 140 mm (34689) / J 2, 180 mm (34690)
- Circlip pliers Classic with MagicTips® For outer rings (shafts) A 1, 140 mm (34699) / A 2, 185 mm (34700)

with safety latching function MagicTips®

Circlip pliers 4-pcs.

Z99000401

Order-No.



26793

1

- Classic circlip pliers For inner rings (drill holes) J 1, 140 mm (26782) / J 2, 180 mm (26783)
- Classic circlip pliers For outer rings (shafts) A 1, 140 mm (26790) / A 2, 180 mm (26791)

INFOBOX: **MagicTips®**



Wiha MagicTips® – Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.

Professional BiCut® high-performance diagonal cutters with Dynamic-Joint®



Switchable

Z 18 0 05

Order-No.	mm	"	mm	Ø mm	SB	EN
38190	200	8"	21	3	-	5
38983	200	8"	21	3	x	5

BiCut® Classic high-performance diagonal cutters with Dynamic-Joint®



Switchable

Z 18 0 01

Order-No.	mm	"	mm	Ø mm	SB	EN
38981	200	8"	21	3	x	5
38060	200	8"	21	3	-	5

High-performance diagonal cutters BiCut® Industrial with Dynamic-Joint®



Switchable

Z 18 0 02

Order-No.	mm	"	mm	Ø mm	SB	EN
38189	200	8"	21	3	-	5
38982	200	8"	21	3	x	5

**INFOBOX:
Professional pliers
Industrial pliers**



Professional Industrial

Professional: pliers, chrome-plated

Industrial: pliers, polished/black oxidised



Professional diagonal cutters with DynamicJoint®



Z 12 1 05

Order-No.	mm	"		Ø mm		
43325	140	5 1/2"	16	1.6	-	5
43334	160	6 1/2"	17	2	-	5
43457	160	6 1/2"	17	2	x	5
43339	180	7"	18	2.3	-	5

Diagonal cutters Classic with DynamicJoint®



Z 12 1 01

Order-No.	mm	"		Ø mm		
43304	140	5 1/2"	16	1.6	-	5
43450	140	5 1/2"	16	1.6	x	5
43332	160	6 1/2"	17	2	-	5
43455	160	6 1/2"	17	2	x	5
43337	180	7"	18	2.3	-	5
43460	180	7"	18	2.3	x	5

Industrial diagonal cutters with DynamicJoint®



Z 12 1 02

Order-No.	mm	"		Ø mm		
43324	140	5 1/2"	16	1.6	-	5
43451	140	5 1/2"	16	1.6	x	5
43333	160	6 1/2"	17	2	-	5
43456	160	6 1/2"	17	2	x	5
43338	180	7"	18	2.3	-	5
43461	180	7"	18	2.3	x	5

Heavy-duty diagonal cutters Professional with DynamicJoint®



Z 16 3 05

with switchable opening spring

Order-No.	mm	"		Ø mm		
40920	160	6,5"	17	2	-	5
41273	180	7"	18	2.5	-	5
41318	180	7"	18	2.5	x	5
41278	200	8"	19	2.8	-	5

Heavy-duty diagonal cutters Industrial with DynamicJoint®



with switchable opening spring

Z 16 3 02

Order-No.	mm	"		Ø mm	SB	
40919	160	6,5"	17	2	-	5
41307	160	6,5"	17	2	x	5
41272	180	7"	18	2.5	-	5
41317	180	7"	18	2.5	x	5
41277	200	8"	19	2.8	-	5
41327	200	8"	19	2.8	x	5

Heavy-duty diagonal cutters Classic with DynamicJoint®



Z 16 2 01

Order-No.	mm	"		Ø mm	SB	
40913	160	6,5"	17	2	-	5
41301	160	6,5"	17	2	x	5
41261	180	7"	18	2.5	-	5
41311	180	7"	18	2.5	x	5
41266	200	8"	19	2.8	-	5
41321	200	8"	19	2.8	x	5

INFOBOX:
Heavy-duty diagonal cutters



with switchable opening spring

- Up to 40% more cutting force thanks to optimised leverage.
- Opening spring with on/off function for fatigue-free work.
- Opening spring can be activated with just one hand.

Combination pliers Professional with DynamicJoint® and OptiGrip



with extra long cutting edge

Order-No.	mm	in	+	Q	Ø mm	Sh.	H	Z 01 0 05
26704	160	6 1/2"	16	1.6	-	5		
27327	160	6 1/2"	16	1.6	x	5		
26707	180	7"	16	1.8	-	5		
27399	180	7"	16	1.8	x	5		
26710	200	8"	17	2	-	5		


Combination pliers Industrial with DynamicJoint® and OptiGrip



with extra long cutting edge

Order-No.	mm	in	+	Q	Ø mm	Sh.	H	Z 01 0 02
30979	160	6 1/2"	16	1.6	-	5		
34565	160	6 1/2"	16	1.6	x	5		
30826	180	7"	16	1.8	-	5		
34307	180	7"	16	1.8	x	5		
30978	200	8"	17	2	-	5		
34308	200	8"	17	2	x	5		


**INFOBOX:
DynamicJoint®**



Wiha DynamicJoint® – A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

**INFOBOX:
OptiGrip**



Wiha OptiGrip – optimal grip due to newly designed gripping surfaces

- A firm hold: The „triple-point support“ protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening – and at the same time significantly less force needed.
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.

Combination pliers Classic with DynamicJoint® and OptiGrip



with extra long cutting edge

Z 01 0 01

Order-No.	mm*	in	+	mm	mm	SB	mm
26703	160	6 1/2"	16	1.6	-	5	
27325	160	6 1/2"	16	1.6	x	5	
26706	180	7"	16	1.8	-	5	
27336	180	7"	16	1.8	x	5	
26709	200	8"	17	2	-	5	
27337	200	8"	17	2	x	5	

Combination pliers Industrial with DynamicJoint® and OptiGrip



with extra long cutting edge

Z 02 0 02

Order-No.	mm*	in	+	mm	mm	SB	mm
32319	200	8"	18	2.3	-	5	
32320	225	9"	19	2.5	-	5	
34567	225	9"	19	2.5	x	5	

Combination pliers Professional with DynamicJoint® and OptiGrip



with extra long cutting edge

Z 02 0 05

Order-No.	mm*	in	+	mm	mm	SB	mm
26713	200	8"	18	2.3	-	5	
26716	225	9"	19	2.5	-	5	

Combination pliers Classic with DynamicJoint® and OptiGrip



with extra long cutting edge

Z 02 0 01

Order-No.	mm*	in	+	mm	mm	SB	mm
26712	200	8"	18	2.3	-	5	
26715	225	9"	19	2.5	-	5	



Needle-nose pliers Professional



with cutting edge straight shape

Z 05 0 05

Order-No.	mm	"	+	Q	Ø mm	SB	
26719	160	6 1/2"	16		1.2	-	5
26722	200	8"	17		1.6	-	5

Classic needle nose pliers



with cutting edge straight shape

Z 05 0 01

Order-No.	mm	"	+	Q	Ø mm	SB	
26718	160	6 1/2"	16		1.2	-	5
27340	160	6 1/2"	16		1.2	x	5
26721	200	8"	17		1.6	-	5
27341	200	8"	17		1.6	x	5

Industrial needle nose pliers



with cutting edge straight shape

Z 05 0 02

Order-No.	mm	"	+	Q	Ø mm	SB	
32322	160	6 1/2"	16		1.2	-	5
34309	160	6 1/2"	16		1.2	x	5
32323	200	8"	17		1.6	-	5
34515	200	8"	17		1.6	x	5

Needle-nose pliers Professional



with cutting edge curved shape, approx. 40°

Z 05 1 05

Order-No.	mm	"	+	Q	Ø mm	SB	
26724	160	6 1/2"	16		1.2	-	5
26726	200	8"	17		1.6	-	5

Industrial needle nose pliers



with cutting edge curved shape, approx. 40°

Z 05 1 02

Order-No.	mm	in			Ø mm	SB	
32324	160	6 1/2"	16		1.2	-	5
34569	160	6 1/2"	16		1.2	x	5
32328	200	8"	17		1.6	-	5
34570	200	8"	17		1.6	x	5

Plastic diagonal cutters Classic



with opening spring without bevelled edge

Z 15 0 01

Order-No.	mm	in			Ø mm	SB	
37402	125	5"			2		5
37403	160	6 1/2"			3		5

Classic needle nose pliers



with cutting edge curved shape, approx. 40°

Z 05 1 01

Order-No.	mm	in			Ø mm	SB	
26723	160	6 1/2"	16		1.2	-	5
27342	160	6 1/2"	16		1.2	x	5
26725	200	8"	17		1.6	-	5
27343	200	8"	17		1.6	x	5

Classic precision mechanic's needle nose pliers



with cutting edge and opening spring in straight shape

Z 36 0 01

Order-No.	mm	in			Ø mm	SB	
36483	160	6 1/2"	10		2		5



Precision mechanic's diagonal cutters Classic



Industrial long flat-nose pliers



With opening spring

Z 44 3 01

Order-No.	mm	"	mm	mm	mm	SB	EN
36189	125	5"	7	0.8	-	5	
43240	125	5"	7	0.8	x	5	

Z 07 0 02

Order-No.	mm	"	mm	mm	SB	EN
32330	160	6 1/2"	-			5
34310	160	6 1/2"	x			5

Professional long flat-nose pliers

Classic long flat-nose pliers




Z 07 0 05

Order-No.	mm	"	mm	mm	SB	EN
26731	160	6 1/2"	-		5	

Z 07 0 01

Order-No.	mm	"	mm	mm	SB	EN
26730	160	6 1/2"	-			5
27344	160	6 1/2"	x			5


Professional long round-nose pliers

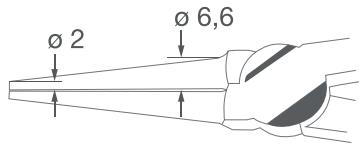

Z 09 0 05

Order-No.	mm	in	SB	
26734	160	6 1/2"	-	5


Classic long round-nose pliers

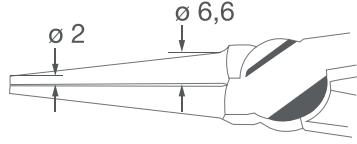

Z 09 0 01

Order-No.	mm	in	SB	
26733	160	6 1/2"	-	5
27345	160	6 1/2"	x	5

Industrial long round-nose pliers

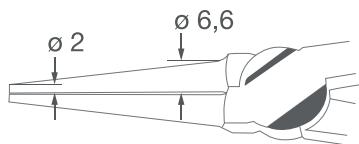

Z 09 0 02

Order-No.	mm	in	SB	
32332	160	6 1/2"	-	5
34568	160	6 1/2"	x	5



Pliers wrench Classic**Water pump pliers Industrial**

Order-No.	mm	in	O:	O:	Z 25 0 01
40923	250	10"	46 mm	5	

box type

Order-No.	mm	in	O:	O:	Z 21 0 02
36038	180	7"	1 1/2"	36 mm	- 5
36985	180	7"	1 1/2"	36 mm	x 5
32342	250	10"	2"	50 mm	- 5
34312	250	10"	2"	50 mm	x 5
36039	300	12"	2 1/2"	63 mm	- 5
36986	300	12"	2 1/2"	63 mm	x 5

Water pump pliers Professional**Water pump pliers Classic**

box type	Z 21 0 05
Order-No.	

Order-No.	mm	in	O:	O:	Z 21 0 05
26762	250	10"	2"	50 mm	5

box type

Order-No.	mm	in	O:	O:	Z 21 0 01
26760	180	7"	1 1/2"	36 mm	- 5
27350	180	7"	1 1/2"	36 mm	x 5
26761	250	10"	2"	50 mm	- 5
27381	250	10"	2"	50 mm	x 5
26763	300	12"	2 1/2"	63 mm	- 5
27382	300	12"	2 1/2"	63 mm	x 5

**INFOBOX:
Plier wrench**

- Required width setting directly on the work piece with no need to press any buttons
- Ratchet principle allows users to fasten screws rapidly with a simple glide.
- Thanks to its slim design and button-free setting, it is ideal for use in tight spaces.
- Smooth, parallel-acting jaws prevent damage on sensitive surfaces.

Water pump pliers Professional**with push button**

Order-No.	mm	in	O:	O:	22 0 05
26766	250	10"	2"	50 mm	5

Water pump pliers Classic**with push button**

Order-No.	mm	"	O:	O:	SB	G	Z 22 0 01
26764	180	7"	1"	36 mm	-	5	
27351	180	7"	1"	36 mm	x	5	
26765	250	10"	2"	50 mm	-	5	
27383	250	10"	2"	50 mm	x	5	
26767	300	12"	2 1/2"	63 mm	-	5	
27384	300	12"	2 1/2"	63 mm	x	5	

Water pump pliers QuickFix Professional**automatic**

Order-No.	mm	"	O:	O:	SB	G	Z 23 0 05
39093	250	10"	1 1/2"	40 mm	-	5	
39095	250	10"	1 1/2"	40 mm	x	5	

Water pump pliers Industrial**with push button**

Order-No.	mm	"	O:	O:	SB	G	Z 22 0 02
36040	180	7"	1"	30 mm	-	5	
36987	180	7"	1"	30 mm	x	5	
32352	250	10"	2"	50 mm	-	5	
34518	250	10"	2"	50 mm	x	5	
36041	300	12"	2 1/2"	63 mm	-	5	
36988	300	12"	2 1/2"	63 mm	x	5	

Water pump pliers QuickFix Classic**automatic**

Order-No.	mm	"	O:	O:	SB	G	Z 23 0 01
39091	250	10"	1 1/2"	40 mm	-	5	
39094	250	10"	1 1/2"	40 mm	x	5	



Classic heavy-duty end cutting nippers



Z 17 0 01

Order-No.	mm	in			Ø mm	SB	(H)
26757	160	6 1/2"	16		1.6	-	5
27372	160	6 1/2"	16	x	1.6	x	5
26758	180	7"	17		1.8	-	5
27373	180	7"	17	x	1.8	x	5
26759	200	8"	18		2	-	5
27374	200	8"	18	x	2	x	5

Monier pliers Classic



Z 31 0 01

Order-No.	mm	in			Ø mm	SB	(H)
26774	220	8 3/4"	16		1.6	-	5
27377	220	8 3/4"	16	x	1.6	x	5
26776	250	10"	17		1.8	-	5
27378	250	10"	17	x	1.8	x	5
26778	280	11"	18		2	-	5
27379	280	11"	18	x	2	x	5
26780	300	12"	18		2	-	5
27380	300	12"	18	x	2	x	5

Classic pincers



Z 30 0 01

Order-No.	mm	in			Ø mm	SB	(H)
26771	180	7"	12		2	-	5
27375	180	7"	12	x	2	x	5
26772	200	8"	13		2.2	-	5
27376	200	8"	13	x	2.2	x	5

Monier pliers Classic



Z 31 0 00

Order-No.	mm	in			Ø mm	SB	(H)
26773	220	8 3/4"	16		1.6	-	5
27501	220	8 3/4"	16	x	1.6	x	5
26775	250	10"	17		1.8	-	5
27502	250	10"	17	x	1.8	x	5
26777	280	11"	18		2	-	5
27503	280	11"	18	x	2	x	5
26779	300	12"	18		2	-	5
27504	300	12"	18	x	2	x	5

Heavy-duty Classic Monier pliers

Z 32 0 01

Order-No.	mm	"	mm	Ø mm	mm	mm
40712	300	12"	19	2.3	-	5
41220	300	12"	19	2.3	x	5

Heavy-duty Classic Plus Monier pliers

Z 32 0 10

Order-No.	mm	"	mm	Ø mm	mm	mm
40713	300	12"	19	2.3	-	5
41221	300	12"	19	2.3	x	5



Circlip pliers Classic with MagicTips®



For inner rings (drill holes)

Z 33 4 01

Order-No.		mm	in			SB		
34688	J 0	140	5 1/2"	8 - 13	-	5		
36975	J 0	140	5 1/2"	8 - 13	x	5		
34689	J 1	140	5 1/2"	12 - 25	-	5		
36225	J 1	140	5 1/2"	12 - 25	x	5		
34690	J 2•	180	7"	19 - 60	-	5		
36222	J 2•	180	7"	19 - 60	x	5		
34691	J 3•	220	9"	40 - 100	-	5		
36272	J 3•	220	9"	40 - 100	x	5		
34692	J 4•	305	12"	85 - 140	-	5		

•with safety latching function MagicTips®
DIN ISO 5256

Circlip pliers Classic with MagicTips®



For inner rings (drill holes)

Z 33 5 01

Order-No.		mm	in			SB		
34693	J 01	140	5 1/2"	8 - 13	-	5		
36976	J 01	140	5 1/2"	8 - 13	x	5		
34694	J 11	140	5 1/2"	12 - 25	-	5		
36223	J 11	140	5 1/2"	12 - 25	x	5		
34695	J 21•	180	7"	19 - 60	-	5		
36224	J 21•	180	7"	19 - 60	x	5		
34696	J 31•	220	9"	40 - 100	-	5		
36226	J 31•	220	9"	40 - 100	x	5		
34697	J 41•	305	12"	85 - 140	-	5		

•with safety latching function MagicTips®
DIN ISO 5256

Circlip pliers Classic with MagicTips®



For outer rings (shafts)

Z 34 4 01

Order-No.		mm	in			SB		
34698	A 0	140	5 1/2"	3 - 10	-	5		
36977	A 0	140	5 1/2"	3 - 10	x	5		
34699	A 1	140	5 1/2"	10 - 25	-	5		
36978	A 1	140	5 1/2"	10 - 25	x	5		
34700	A 2•	185	7"	19 - 60	-	5		
36220	A 2•	185	7"	19 - 60	x	5		
34701	A 3•	240	9"	100 - 40	-	5		
36219	A 3•	240	9"	100 - 40	x	5		
34702	A 4•	300	12"	140 - 85	-	5		

•with safety latching function MagicTips®
DIN ISO 5256

For outer rings (shafts)

Z 34 5 01

Order-No.		mm	in			SB		
34703	A 01	140	5 1/2"	3 - 10	-	5		
36979	A 01	140	5 1/2"	3 - 10	x	5		
34704	A 11	140	5 1/2"	10 - 25	-	5		
36980	A 11	140	5 1/2"	10 - 25	x	5		
34705	A 21•	185	7"	19 - 60	-	5		
36218	A 21•	185	7"	19 - 60	x	5		
34706	A 31•	240	9"	40 - 100	-	5		
36221	A 31•	240	9"	40 - 100	x	5		
34707	A 41•	300	12"	85 - 140	-	5		

•with safety latching function MagicTips®
DIN ISO 5256



Classic circlip pliers



For inner rings (drill holes)

Z 33 0 01

Order-No.		mm	in	Outer ring diameter	Inner ring diameter	Length
26781	J 0	140	5 1/2"	8 - 13	5	
26782	J 1	140	5 1/2"	12 - 25	5	
26783	J 2	180	7"	19 - 60	5	
26784	J 3	225	9"	40 - 100	5	
29425	J 4	310	12"	85 - 140	5	

DIN ISO 5256

Classic circlip pliers



Classic circlip pliers



For outer rings (shafts)

Z 34 0 01

Order-No.		mm	in	Outer ring diameter	Inner ring diameter	Length
26789	A 0	140	5 1/2"	3 - 10	5	
26790	A 1	140	5 1/2"	10 - 25	5	
26791	A 2	180	7"	19 - 60	5	
26792	A 3	225	9"	40 - 100	5	
29428	A 4	310	12"	85 - 140	5	

DIN ISO 5256

For inner rings (drill holes)

Z 33 1 01

Order-No.		mm	in	Outer ring diameter	Inner ring diameter	Length
26785	J 01	140	5 1/2"	8 - 13	5	
26786	J 11	140	5 1/2"	12 - 25	5	
26787	J 21	180	7"	19 - 60	5	
26788	J 31	225	9"	40 - 100	5	
29427	J 41	310	12"	85 - 140	5	

DIN ISO 5256

INFOBOX: MagicTips®



Wiha MagicTips® – Top of their class.

- Maximum grip: The special latching function preventing jumping away of the safety rings makes the Wiha circlip pliers truly unique.
- Hard as steel: Additional hardening of tips means high wear resistance and therefore excellent durability.
- Precise: Precision tips of high performance steel for maximum grip and high stability.

For outer rings (shafts)

Z 34 1 01

Order-No.		mm	in	Outer ring diameter	Inner ring diameter	Length
26794	A 01	140	5 1/2"	3 - 10	5	
26795	A 11	140	5 1/2"	10 - 25	5	
26796	A 21	180	7"	19 - 60	5	
26797	A 31	225	9"	40 - 100	5	
29429	A 41	310	12"	85 - 140	5	

DIN ISO 5256



Corner pipe pliers Classic**Professional revolving punch pliers****S-mouth**

Z 26 0 00

Order-No.	mm	O:	W:	H:	
29435	335	1"	0 - 50	1	
29436	430	1 1/2"	0 - 60	1	
29437	545	2"	0 - 80	1	

Z 65 0 05

Order-No.	mm	O:	W:	H:	
28402	225	9"	2 - 4.5	5	

Corner pipe pliers Classic**Revolving punch and loop pliers Professional****90°**

Z 26 2 00

Order-No.	mm	O:	W:	H:	
29441	320	1"	0 - 50	1	
29442	415	1 1/2"	0 - 60	1	
29443	540	2"	0 - 80	1	

Z 65 2 05

Order-No.	mm	O:	W:	H:	
29550	225	9"	4 - 5	5	

Gripping pliers Classic**Bolt cutter Classic****with wire cutter**

Z 66 0 00

Order-No.	mm	"	Ø:	□:	(mm)
29485	180	7"	8 - 30	0 - 20	5
29486	250	10"	8 - 40	0 - 20	5
29487	300	12"	8 - 65	0 - 30	5

Z 27 0 01

Order-No.	mm	"	(mm)	Ø mm	(mm)
39374	450	18"	6	6	1
39376	600	24"	7	8	1
39378	750	30"	8	9	1
39380	900	36"	9	11	1

Replacement cutter head**for bolt cutter Classic**

Z 27 0 01K

Order-No.	(mm)	Ø mm	(mm)
39375	6	6	1
39377	7	8	1
39379	8	9	1
39381	9	11	1



Pliers set Professional ESD**SMD tweezer set Professional ESD****Diagonal cutters, oblique end cutting nippers, needle nose pliers 5-pcs. incl. tool folder**

Z99000104

Order-No.

33507



1

Professional ESD diagonal cutters wide, pointed head without bevelled edge 115 mm, 4 1/2" (26821)

Professional ESD diagonal cutters wide, semi-rounded head with bevelled edge 115 mm, 4 1/2" (26831)

Oblique end cutting nippers Professional ESD wide head, approx. 29° with small bevelled edge 115 mm, 4 1/2" (26835)

Professional ESD needle nose pliers straight 120 mm, 4 3/4" (26799)

Tool kit

assorted 5-pcs. incl. box

ZP99014002

Order-No.

32349



1

Universal tweezers Professional ESD Type AA 130 mm (32318)

Precision tweezers Professional ESD Type PSF 130 mm (32325)

SMD tweezers Professional ESD Type 13 120 mm (32340)

SMD tweezers Professional ESD Type 59 117 mm (32344)

Box

**INFOBOX:
Electrostatic
conductive ESD tools**


Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 - 10^9 ohms.

Professional ESD diagonal cutters



narrow, pointed head with small bevelled edge

Z 40 1 04

Order-No.	mm	in		Ø mm		SB	(H)
26808	115	4 1/2"	7	0.6	-	5	
27442	115	4 1/2"	7	0.6	x	5	

DIN ISO 9654, IEC 61340-5-1.

Diagonal cutters Professional ESD



narrow, pointed head with small bevelled edge

Z 40 4 04

Order-No.	mm	in		Ø mm		SB	(H)
26814	115	4 1/2"	2	1	-	5	
27443	115	4 1/2"	2	1	x	5	

DIN ISO 9654, IEC 61340-5-1.

Professional ESD diagonal cutters



narrow, pointed head without bevelled edge

Z 40 3 04

Order-No.	mm	in		Ø mm		SB	(H)
33521	115	4 1/2"	2	1	5		

DIN ISO 9654, IEC 61340-5-1.

Professional ESD diagonal cutters



wide, pointed head with bevelled edge


Z 41 1 04

Order-No.	mm	in		Ø mm		SB	(H)
26816	115	4 1/2"	7	1	-	5	
27444	115	4 1/2"	7	1	x	5	

DIN ISO 9654, IEC 61340-5-1.



Professional ESD diagonal cutters




wide, pointed head without bevelled edge

Z 41 3 04

Order-No.	mm	"	mm	mm	mm	mm
26821	115	4 1/2"	2	1	-	5
27445	115	4 1/2"	2	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Professional ESD diagonal cutters




narrow, semi-rounded head with small bevelled edge

Z 43 1 04

Order-No.	mm	"	mm	mm	mm	mm
26826	115	4 1/2"	2	1.2	-	5
27447	115	4 1/2"	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Professional ESD diagonal cutters




wide, pointed head and wire trapping spring with small bevelled edge

Z 41 4 04

Order-No.	mm	"	mm	mm	mm	mm
26822	115	4 1/2"	2	1.2	-	5
27446	115	4 1/2"	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Professional ESD diagonal cutters



wide, semi-rounded head with bevelled edge

Z 44 1 04

Order-No.	mm	"	mm	mm	mm	mm
26831	115	4 1/2"	7	1	-	5
27448	115	4 1/2"	7	1	x	5

DIN ISO 9654. IEC 61340-5-1.

Professional ESD diagonal cutters



wide, semi-rounded head with small bevelled edge

Z 44 3 04

Order-No.	mm	in	2	Ø mm	SB	5
26832	115	4 1/2"	2	1.2	-	5
27449	115	4 1/2"	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Professional ESD end cutting nippers



narrow head with small bevelled edge

Z 47 1 04

Order-No.	mm	in	2	Ø mm	SB	5
26839	110	4 1/4"	2	0.6	-	5
27452	110	4 1/4"	2	0.6	x	5

DIN ISO 9654. IEC 61340-5-1.

Oblique end cutting nippers Professional ESD



wide head, approx. 29° with small bevelled edge

Z 46 1 04

Order-No.	mm	in	2	Ø mm	SB	5
26835	115	4 1/2"	2	1.2	-	5
27450	115	4 1/2"	2	1.2	x	5

DIN ISO 9654. IEC 61340-5-1.

Professional ESD end cutting nippers



wide head with small bevelled edge

Z 47 2 04

Order-No.	mm	in	2	Ø mm	SB	5
26840	115	4 1/2"	2	1.4	-	5
27453	115	4 1/2"	2	1.4	x	5

DIN ISO 9654. IEC 61340-5-1.



Professional ESD needle nose pliers



straight

Order-No.	mm	in		Z 36 0 04
26799	120	4 3/4"	5	
27329	120	4 3/4"	5	
27905	145	5 3/4"	5	

Professional ESD round-nose pliers



Short, rounded jaws

Order-No.	mm	in		Z 37 0 04
26804	120	4 3/4"	-	5
27440	120	4 3/4"	x	5

DIN ISO 9654, IEC 61340-5-1.

Professional ESD needle nose pliers



curved form, approx. 45°

Order-No.	mm	in		Z 36 1 04
26802	120	4 3/4"	-	5
27439	120	4 3/4"	x	5

DIN ISO 9654, IEC 61340-5-1.

Professional ESD flat-nose pliers



Short, flat jaws

Order-No.	mm	in		Z 38 0 04
26806	120	4 3/4"	-	5
27441	120	4 3/4"	x	5


DIN ISO 9654, IEC 61340-5-1.

Universal tweezers Professional ESD**Type AA**

ZP 01 0 14

Order-No.	mm		
32318	130	AA	10

IEC 61340-5-1.

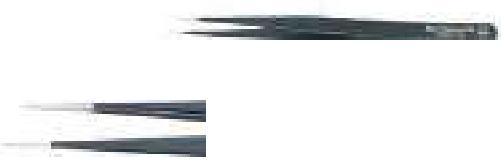Precision tweezers Professional ESD**Type SS**

ZP 09 0 14

Order-No.	mm		
32326	135	SS	10

IEC 61340-5-1.

Precision tweezers Professional ESD**Type GG**

ZP 06 0 14

Order-No.	mm		
32347	130	GG	10

IEC 61340-5-1.

Precision tweezers Professional ESD**Type 00**

ZP 11 0 14

Order-No.	mm		
32327	120	0	10

IEC 61340-5-1.

Precision tweezers Professional ESD**Type PSF**

ZP 07 1 14

Order-No.	mm		
32325	130	PSF	10

IEC 61340-5-1.


Precision tweezers Professional ESD**Type 2a**

ZP 15 0 14

Order-No.	mm		
32329	120	2a	10

IEC 61340-5-1.

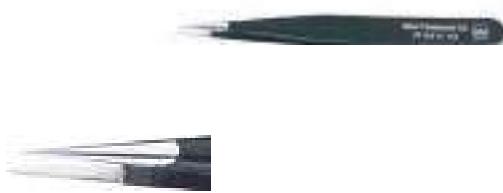


Precision tweezers Professional ESD**Type 3c**

Order-No.	mm*		ZP 16 0 14
32346	110	3c	10
IEC 61340-5-1.			

Precision tweezers Professional ESD**Type 7abb**

Order-No.	mm*		ZP 20 2 14
32336	120	7abb	10
IEC 61340-5-1.			

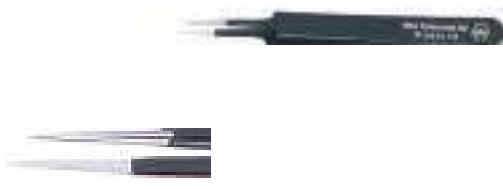Precision tweezers Professional ESD**Type 5**

Order-No.	mm*		ZP 18 0 14
32334	110	5	10
IEC 61340-5-1.			

SMD tweezers Professional ESD**Type 12**

Order-No.	mm*		ZP 24 0 14
32338	120	12	10
IEC 61340-5-1.			

Precision tweezers Professional ESD**Type 7a**

Order-No.	mm*		ZP 20 1 14
32335	120	7a	10
IEC 61340-5-1.			

SMD tweezers Professional ESD**Type 13**

Order-No.	mm*		ZP 25 2 14
32340	120	13	10
IEC 61340-5-1.			

Universal tweezers Professional ESD

**Type 40**

ZP 46 0 14

Order-No.	mm*		
32343	145	40	10

IEC 61340-5-1.

SMD tweezers Professional ESD

**Type 59**


ZP 50 0 14

Order-No.	mm*		
32344	117	59	10

IEC 61340-5-1.



Electronic diagonal cutters




wide, pointed head without bevelled edge

Z 41 1 03

Order-No.	mm	"	+	Ø mm	SB	(H)
26818	130	5 1/2"	3	1.3	-	5
27391	130	5 1/2"	3	1.3	x	5

Electronic diagonal cutters




**wide, pointed head and wire trapping spring
without bevelled edge**

Z 41 6 03

Order-No.	mm	"	+	Ø mm	SB	(H)
26825	130	5 1/8"	3	1.3	-	5
27395	130	5 1/8"	3	1.3	x	5

Electronic diagonal cutters




wide, pointed head with small bevelled edge

Z 41 3 03

Order-No.	mm	"	+	Ø mm	SB	(H)
26815	135	5 1/3"	8	0.8	-	5
27393	135	5 1/3"	8	0.8	x	5


Electronic diagonal cutters



very narrow, pointed head without bevelled edge


Z 40 0 03

Order-No.	mm	"	+	Ø mm	SB	(H)
26812	128	5 1/8"	2	0.8	-	5
27388	128	5 1/8"	2	0.8	x	5

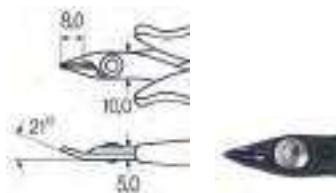Electronic diagonal cutters
**narrow, pointed head and wire trapping spring
without bevelled edge**


Z 40 1 03

Order-No.	mm	"	2	Ø mm	SB	
26813	126	5"	2	1	-	5
27390	126	5"	2	1	x	5

Oblique end cutting nippers Electronic
very narrow, short head without bevelled edge


Z 46 0 03

Order-No.	mm	"	2	Ø mm	SB	
26830	125	5"	2	0.6	-	5
27397	125	5"	2	0.6	x	5

Oblique end cutting nippers Electronic
wide, pointed head without bevelled edge

Z 46 0 03

Order-No.	mm	"	2	Ø mm	SB	
26833	130	5 1/8"	3	1.3	-	5
27398	130	5 1/8"	3	1.3	x	5

Electronic needle nose pliers
narrow, short head straight form

Z 36 0 03

Order-No.	mm	"	2	Ø mm	SB	
26801	135	5 1/3"	-	-	-	5
27326	135	5 1/3"	x	-	-	5



Electronic needle nose pliers**Narrow, long head, curved about 40°**

Z 36 1 03

Order-No.	mm	in	SB	EN
41015	133	5 1/4"	-	5
41222	133	5 1/4"	x	5

Electronic stripping pliers**Stripping points 0.4-1.3 mm**

Z 49 2 03

Order-No.	mm	in	Ø mm	AWG	SB	EN
33472	165	6 1/2"	0.4 - 1.3	26 - 16	-	5
35820	165	6 1/2"	0.4 - 1.3	26 - 16	x	5

Electronic stripping pliers**Stripping points 0.8-2.6 mm²**

Z 49 2 03

Order-No.	mm	in	Ø mm	AWG	SB	EN
33471	165	6 1/2"	0.8 - 2.6	20 - 10	-	5
36794	165	6 1/2"	0.8 - 2.6	20 - 10	x	5



The cutting capacities for our pliers.

Hard wire

Screws, wire rope, wire basket, electric rail

11

12

13

14

15

16

17

18

19

20

21

TriCut installation pliers

Electrician's diagonal cutters

Pincers



Combination pliers



Diagonal cutters



Heavy-duty diagonal cutters



End cutting nippers




Monier pliers



Needle nose pliers



Bent needle nose pliers

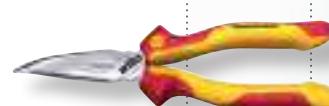**Hardened spring steel**

Springs, hardened pins, chains

Lineman's pliers

BiCut® Diagonal cutters
100 % / 200 %

Heavy-duty Monier pliers



High-leverage combination pliers





Striking and measuring tools.

Optimum force transmission

With optimally uniform weight distribution, the Wiha electric hammer strikes a perfect balance and is also eminently suitable for use in confined working environments. Removing nails and nail clamps as well as fixing cables and dowels into position without causing damage become extremely simple tasks. Wiha's scaled impact screwdriver blade ensures that the portable dowel racket makes a perfectly dimensioned dowel hole to the required depth anywhere at any time without making a mess, unlike power tools.

Wiha measuring tools prove to be further dependable helpers during electrical installation work. The Wiha electrician's spirit level allows users to easily mark spaces for up to four flush boxes. This spirit level stands out due to its effortless dimension measurement and perfectly visible bubbles.

Application

Striking and measuring tools.

Impact tools

Soft-faced hammer set "Safety" with assorted hammer faces, 8-pcs. in box
Page 324



Soft-faced hammer "Safety" medium soft/hardwith hickory wooden handle, round hammer face
Page 325



Sledgehammer no recoil, medium hard with hickory wooden handle, round hammer face
Page 328



Soft-faced hammer dead-blow, medium hard with steel tube handle, round hammer face
Page 328



Electrician's hammer with 300 g hammer head, in blister pack
Page 330



SoftFinish® dowel racket set with dowels with 6 mm round blade in blister pack, 5-pcs.
Page 330



Measurement tools

Electrician's spirit level 40 cm
Page 331



Callipers digiMax digital Reading 0.01 mm
Page 332



Electrician's Longlife® folding ruler, 2 m metric, 10 segments
Page 332



Folding ruler LongLife Plus Composite 2 m metric, 10 segments
Page 332





with assorted hammer faces, 8-pcs. in box

832B801

Order-No.

44008

1

- 1 x Face soft Round for soft-faced safety hammer
- 2 x Face medium-soft Round for soft-faced safety hammer
- 2 x Face medium-hard Round for soft-faced safety hammer
- 2 x Face hard Round for soft-faced safety hammer
- 1 x Face very hard Round for soft-faced safety hammer
- 1 x Hickory wooden handle for safety soft-faced hammer
- 1 x Hammer housing set with screw and locknut for Safety soft-faced hammer
- 1 x 6.0 mm

**INFOBOX:
Colour code system for
Wiha hammer faces**



Safety note:

- Always wear safety glasses and safety gloves when working with soft-faced hammers. Please observe the applicable national standards and regulations.
- Please observe the following tightening torques when replacing heads or handles:
 - Size 30 = 20 Nm
 - Size 40 = 40 Nm
 - Size 50 = 70 Nm
 - Size 60 = 70 Nm
 - Size 80 = 80 Nm

Hammer face	Application range
soft (blue)	for sensitive materials, such as those in furniture and interior construction, minor assembly. Material: elastomer.
medium soft (black)	for robust work, such as paving, tiling, dry wall installation. Material: rubber.
medium hard (yellow)	universal use, such as for tool and machine manufacture, car repairs, sheet metal and assembly work. Material: polyurethane.
hard (orange)	for high stress mechanical tasks such as assembly and dismantling work, building and construction work, repair work. Material: cellulose acetate.
very hard (white)	for high impact work, heavy industry and construction, mould construction, road construction, horticulture and landscaping. Material: polyamide.

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/

Soft-faced hammer Safety soft/medium soft



with hickory wooden handle, round hammer face

832-13

Order-No.	Ø mm	L mm	W mm	H mm	G
26649	30	87	290	289	5
26650	40	110	325	637	5
26651	50	131	360	1117	2
26652	60	150	400	1636	2

Soft-faced hammer Safety medium soft/medium hard



with hickory wooden handle, round hammer face

832-35

Order-No.	Ø mm	L mm	W mm	H mm	G
26434	30	87	290	295	5
26435	40	110	325	636	5
26436	50	131	360	1100	2
26437	60	150	400	1623	2

Soft-faced hammer Safety medium soft/hard



with hickory wooden handle, round hammer face

832-15

Order-No.	Ø mm	L mm	W mm	H mm	G
26653	30	87	290	272	5
26654	40	110	325	620	5
26655	50	131	360	1077	2
26656	60	150	400	1555	2

Soft-faced hammer Safety medium soft/hard



with hickory wooden handle, round hammer face

832-38

Order-No.	Ø mm	L mm	W mm	H mm	G
26611	30	87	290	306	5
26612	40	110	325	621	5
26613	50	131	360	1103	2
26614	60	150	400	1640	2

Soft-faced hammer Safety medium soft/medium soft



with hickory wooden handle, round hammer face

832-33

Order-No.	Ø mm	L mm	W mm	H mm	G
26509	30	87	290	302	5
26431	40	110	325	640	5
26432	50	131	360	1130	2
26433	60	150	400	1692	2
26439	80	185	490	3136	2



Soft-faced hammer Safety medium soft/very hard



with hickory wooden handle, round hammer face

832-39

Order-No.			mm	+		
26657	30	87	290	314	5	
26658	40	110	325	649	5	
26659	50	131	360	1099	2	
26660	60	150	400	1682	2	
26582	80	185	490	3090	2	
26661	80L•	185	840	3324	2	

•Sledgehammer

Face soft



Round for soft-faced safety hammer

831-1

Order-No.		+	
26663	30	20.5	5
26664	40	44	5
26665	50	83.5	2
26666	60	136	2

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/

Soft-faced hammer Safety medium hard/medium hard



with hickory wooden handle, round hammer face

832-55

Order-No.			mm	+		
26640	30	87	290	296	5	
26641	40	110	325	609	5	
26642	50	131	360	1120	2	
26643	60	150	400	1638	2	

Round for soft-faced safety hammer

831-3

Order-No.		+	
26422	30	30.6	5
26423	40	78	5
26424	50	129.5	2
26425	60	229	2
26426	80•	479	2

•also for sledge hammers

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/

Soft-faced hammer Safety medium soft/very hard



with hickory wooden handle, round hammer face

832-99

Order-No.			mm	+		
26644	30	87	290	299	5	
26645	40	110	325	602	5	
26646	50	131	360	1128	2	
26647	60	150	400	1637	2	
26648	80	185	490	2940	2	
26674	80L•	185	840	3284	2	

•Sledgehammer

Round for soft-faced safety hammer

831-5

Order-No.		+	
26427	30	28.2	5
26428	40	58.5	5
26429	50	117	2
26430	60	189	2

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/

Face hard**Hammer housing set****Round for soft-faced safety hammer**

831-8

Order-No.	Ø mm	Length mm	Box
26615	30	25.5	5
26616	40	53.5	5
26618	50	98.7	2
26620	60	182.5	2

with screw and locknut for Safety soft-faced hammer

829-0

Order-No.	Ø mm	Length mm	Box
26668	30	159	1
26669	40	375	1
26670	50	709	1
26671	60	1017	1
26672	80•	1894	1

•also for sledge hammers

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/**Face very hard****Hickory wooden handle****Round for soft-faced safety hammer**

831-9

Order-No.	Ø mm	Length mm	Box
26510	30	26.8	5
26511	40	57.4	5
26512	50	112	2
26513	60	191	2
26514	80•	395	2

•also for sledge hammers

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/**for safety soft-faced hammer**

830-0

Order-No.	Ø mm	Length mm	Box
26417	30	260	93
26418	40	280	119
26419	50	310	190
26420	60	340	202
26421	80	400	302
26667	80	800	601

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/

Soft-faced hammer dead-blow, very hard



with hickory wooden handle, round hammer face

8001

Order-No.			mm	+	-	
39008	30	115	350	444	5	
39010	40	125	375	750	5	
39012	50	135	385	1040	2	
39014	60	165	420	1700	2	

Soft-faced hammer dead-blow, very hard



With steel tube handle, round hammer face

8021

Order-No.			mm	+	-	
39017	30	115	290	556	5	
39019	40	125	305	792	5	
39021	50	135	365	1276	2	
39022	60	165	375	1868	2	

Soft-faced hammer dead-blow



with hickory wooden handle, round hammer face

800

Order-No.			mm	+	-	
02092	25	108	320	300	5	
02093	30	115	350	436	5	
02094	35	118	355	543	5	
02095	40	125	375	736	5	
02096	45	130	380	848	2	
02097	50	135	385	1085	2	
02098	60	165	420	1710	2	
02099	70	165	430	2256	2	

Soft-faced hammer dead-blow, medium hard



With steel tube handle, round hammer face

802

Order-No.			mm	+	-	
02122	25	108	288	461	5	
02123	30	115	290	558	5	
02124	35	118	300	659	5	
02125	40	125	305	791	5	
02126	45	130	310	935	2	
02127	50	135	365	1277	2	
02128	60	165	375	1879	2	
02129	70	165	385	2571	2	

Sledgehammer no recoil, medium hard



with hickory wooden handle, round hammer face

800V

Order-No.			mm	+	-	
02101	80	205	880	4580	2	
02091	100	210	1000	6880	1	

Hickory wooden handle**Round for soft-faced no-recoil hammer**

800S

Order-No.	Ø mm	mm	+	mm	
02113	25	295	63	10	
02114	30	320	105	10	
02115	40	335	142	10	
02116	50	335	145	10	
02117	60	360	192	5	
28051	80•	800	792	10	
28052	100•	900	1017	1	

• also for sledge hammers

You will find detailed instructions on replacing www.wiha.com/gb/en/service/downloads/**Face medium-hard****Round for soft-faced no-recoil hammer**

800K

Order-No.	Ø mm	mm	
02103	25	13.17	10
02104	30	18.4	10
02105	35	26	10
02106	40	37.5	10
02107	45	52.5	5
02108	50	72	5
02109	60	119	5
02110	70	166	5
02111	80	239	2
02102	100	394	2

Face very hard**Round for soft-faced no-recoil hammer**

8001K

Order-No.	Ø mm	mm	
39149	30	17.4	10
39150	40	69	5
39151	50	67	2
39152	60	115	1

**INFOBOX:
Dead-blow hammer**

- The special metal filling in the hammer head prevents recoil.
- 25% more hammer head mass provides additional power.
- Preserves delicate surfaces and edges through high-impact effect.



SoftFinish® dowel racket set with dowels



Electrician's hammer



with 6 mm round blade in blister pack, 5-pcs.

SB534S5

846

Order-No.



41289

1

1 x Dowel racket

2 x 30 mm dowel / 2 x 40 mm dowel

with 300 g hammer head, in blister pack

Order-No.



mm*

+/-



42071 23.9 283 500 4

INFOBOX: SoftFinish® dowel racket set with dowels



- Makes it easier to insert dowels and saves valuable working time.
- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.

INFOBOX: Electrician's hammer



- With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatigue-free work.
- Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-to-access spots.
- Optimum access into corners and confined spaces thanks to U-shaped striking surface.
- The flat hammer handle lower surface acts as a soft-faced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.

Electrician's spirit level



40 cm

246

Order-No. mm 400 330

1

INFOBOX: **Electrician's spirit level, 40 cm**



- Quick, easy marking of positions for up to four flush boxes in just one simple work step thanks to the integrated marking points.
- The continuous housing allows users to mark lines without interruption.
- An additional scale on the upper surface ensure precise measurement even when viewing from above.
- The bubbles are clearly visible, even from a sharp angle.
- The level is perfectly suitable for portable use thanks to its compact design.



Callipers digiMax digital**Reading 0.01 mm**

4111

Order-No.				
29422	150	6"	139	5

Electrician's Longlife® folding ruler, 2 m**metric, 10 segments**

4102008

Order-No.				
42068	15	orange	135	10

Callipers caliMax®**Reading 0.1 mm**

4113

Order-No.				
27083	150	6"	74	10

Folding ruler LongLife Plus Composite 2 m**metric, 10 segments**

4102005

Order-No.				
37067	15	red / black	124	10

Analogue callipers dialMax**Reading 0.1 mm**

4112

Order-No.				
27082	150	6"	104	1

Analogue callipers dialMax ESD**Reading 0.1 mm**

4112

Order-No.				
31439	150	6"	96	1

**INFOBOX:
Longlife® Plus
composite folding ruler**

- High rigidity minimises risk of breakage.
- Tight 90° and 180° latching of all joints.
- Metal ends which cannot be lost on the first and last segment.
- Scale running backwards (recto and verso) enables reading from both sides.

Folding ruler Longlife All in One 2 m**metric, 10 segments**

4102007

Order-No.	mm	inch	ft/inch	inch
33232	15	white	139	10

Folding ruler LongLife Plus 2 m**metric, 10 segments**

4102001

Order-No.	mm	inch	ft/inch	inch
27055	15	yellow	136	10
27059	15	white	136	10

Folding ruler Longlife 2 m**metric, 10 segments**

4102000

Order-No.	mm	inch	ft/inch	inch
27058	15	yellow	137	10
27057	15	white	136	10

Folding ruler Longlife 1 m**metric, 10 segments**

4101000

Order-No.	mm	inch	ft/inch	inch
27061	13	yellow	43	10
27062	13	white	43	10

Measuring tape 5 m**With belt clip**

Order-No.	mm	inch	inch	inch
33251	70	80	5000 x 19	1





Electrotechnical accessories

For a safe connection.

It is especially important for electricians to ensure that individual wires do not get crushed or misdirected when connecting fine-wired lines. If they do, there is a risk of cable breaks or even short circuits, which can potentially cause a fire. Wire-end sleeves can prevent such risks and provide reliable contacts, thus ensuring things work safely for the long term. The conical-shaped collar makes it easier to insert wires into the sleeve. The sleeve also makes it easier to insert the cable into the terminal. The twin wire-end sleeves are specifically designed for two-conductor connection. Wiha halogen-free wire-end sleeves offer heat resistance up to 105 °C.

Eminently suitable for connecting fine-wired lines, especially terminal connections.

With tool for stripping, skinning and trimming cables between 0.03 and 16 mm².

For applications in electrics

Stripping and crimping tool set 4-pcs. with cable connectors 2,600 pcs. colour code DIN in assortment box

Page 336



Insert boxes set 16-pcs. for assortment box connector elements

Page 337



Stripping and crimping tool set 5-pcs. with wire end ferrules 500 pcs. colour code DIN in L-Boxx Mini

Page 337



Wire-end sleeves display Colour code DIN, 0.5 - 10 mm² in polyester bag and 0.5 - 16 mm² in organiser box

Page 338



Wire end sleeves with plastic collar set 100 units, colour code 1 (FR) / DIN

Page 340



Twin wire end ferrules with plastic collar 100 units, colour code 1 (FR) & DIN

Page 342



Wire end sleeves with plastic collar set 0.5-2.5 mm², 400 units, DIN colour code, in dispenser

Page 339



Twin wire end sleeves with plastic collar set 2 x 0.75 - 2 x 2.5 mm², 200 units, DIN colour code, in dispenser

Page 339



Butt connectors, insulated 100 units as per DIN

Page 345




Female blade connectors, insulated 100 units as per DIN

Page 345



Female blade connectors, fully insulated 100 units as per DIN

Page 346



Male blade connectors, insulated 100 units as per DIN

Page 346



Stripping and crimping tool set 4-pcs.



with cable connectors 2,600 pcs. colour code DIN in assortment box

93001013

Order-No.



43984

1

- ◆ 1 x Automatic crimp tool for wire-end sleeves hex crimping
- 1 x Stripping tool automatic up to 16 mm² in blister pack
- 1 x Crimping tools for insulated cable eyes and contacts
- 400 x 0.5 mm² / 400 x 0.75 mm² / 400 x 1 mm² / 300 x 1.5 mm² / 200 x 2.5 mm² / 100 x 4 mm² / 50 x 6 mm² / 50 x 10 mm² / 50 x 16 mm²
- 50 x 0.5 - 1 mm² / 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm² / 50 x 4 - 6 mm²
- 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm²
- 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²
- 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²
- 1 x Box

With connection elements, 2,600 units, colour code 1 (FR), in assortment box

93001011

Order-No.



43982

1

- ◆ 1 x Automatic crimp tool for wire-end sleeves hex crimping
- 1 x Stripping tool automatic up to 16 mm² in blister pack
- 1 x Crimping tools for insulated cable eyes and contacts
- 400 x 0.5 mm² / 400 x 0.75 mm² / 400 x 1 mm² / 300 x 1.5 mm² / 200 x 2.5 mm² / 100 x 4 mm² / 50 x 6 mm² / 50 x 10 mm² / 50 x 16 mm²
- 50 x 0.5 - 1 mm² / 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm² / 50 x 4 - 6 mm²
- 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm² / 50 x 4 - 6 mm²
- 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²
- 50 x 0.5 - 1 mm² / 50 x 1.5 - 2.5 mm²
- 1 x Box

Insert boxes set



16-pcs. for assortment box connector elements

93001911R

Order-No.

43995



1

8 x Assortment box, small

8 x Assortment box, large

Spare part: Insert boxes for the connection elements assortment box 43982 and 43984

Stripping and crimping tool set 5-pcs.



with wire end ferrules 500 pcs. colour code DIN in L-Boxx Mini

93001003

Order-No.

43987



1

Stripping/ insulating / crimping

1 x Automatic crimp tool for wire-end sleeves hex crimping

1 x Stripping tool automatic up to 16 mm² in blister pack

Wire end sleeves with plastic collar set 0.5–2.5 mm², 400 units, DIN colour code, in dispenser (43904)
50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 mm² / 100 x 1.5 mm² / 50 x 2.5 mm²

Wire end sleeves with plastic collar set 4–16 mm², 100 units, DIN colour code, in dispenser (43903)
50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

Storage

1 x L Boxx Mini

With wire end sleeves, 500 units, colour code 1 (FR), in L Boxx Mini

93001001

Order-No.

43985



1

Stripping/ insulating / crimping

1 x Automatic crimp tool for wire-end sleeves hex crimping

1 x Stripping tool automatic up to 16 mm² in blister pack

Wire end sleeves with plastic collar set 0.5–2.5 mm², 400 units, colour code 1 (FR), in dispenser (43900)
50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 mm² / 100 x 1.5 mm² / 50 x 2.5 mm²

Wire end sleeves with plastic collar set 4–16 mm², 100 units, colour code 1 (FR) in dispenser (43899)
50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

Storage

1 x L Boxx Mini



Wire-end sleeves display



Colour code DIN, 0.5 - 10 mm² in polyester bag and 0.5 - 16 mm² in organiser box

C000CVH

Order-No.

1

44007

1

8 x Wire end sleeves with plastic collar set 0.5–2.5 mm², 400 units, DIN colour code, in dispenser (43904) 50 x 0,5 mm² / 100 x 0,75 mm² / 100 x 1 mm² / 100 x 1,5 mm² / 50 x 2,5 mm²

8 x Wire end sleeves with plastic collar set 4–16 mm², 100 units, DIN colour code, in dispenser (43903) 50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

80 x 0.5 mm² / 80 x 0.75 mm² / 60 x 1 mm² / 60 x 1.5 mm² / 50 x 2.5 mm² / 30 x 4 mm² / 20 x 6 mm² / 20 x 10 mm²

Colour code 1 (FR), 0.5 - 10 mm² in polyester bag and 0.5 - 16 mm² in organiser box

C000AVH

Order-No.

1

44005

1

8 x Wire end sleeves with plastic collar set 0.5–2.5 mm², 400 units, colour code 1 (FR), in dispenser (43900) 50 x 0,5 mm² / 100 x 0,75 mm² / 100 x 1 mm² / 100 x 1,5 mm² / 50 x 2,5 mm²

8 x Wire end sleeves with plastic collar set 4–16 mm², 100 units, colour code 1 (FR) in dispenser (43899) 50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

80 x 0.5 mm² / 80 x 0.75 mm² / 60 x 1 mm² / 60 x 1.5 mm² / 50 x 2.5 mm² / 30 x 4 mm² / 20 x 6 mm² / 20 x 10 mm²

Wire end sleeves with plastic collar set**Twin wire end sleeves with plastic collar set****0.5–2.5 mm², 400 units, DIN colour code, in dispenser**

C000C400

Order-No.



43904

8

50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 mm² /
100 x 1.5 mm² / 50 x 2.5 mm²

2 x 0.75 - 2 x 2.5 mm², 200 units, DIN colour code, in dispenser

C001C200

Order-No.



43907

8

50 x 2 x 0.75 / 50 x 2 x 1 / 50 x 2 x 1.5 / 50 x 2 x 2.5

0.5–2.5 mm², 400 units, colour code 1 (FR), in dispenser

C000A400

Order-No.



43900

8

50 x 0.5 mm² / 100 x 0.75 mm² / 100 x 1 mm² /
100 x 1.5 mm² / 50 x 2.5 mm²

2 x 0.75 - 2 x 2.5 mm², 200 units, colour code 1 (FR), in dispenser

C001A200

Order-No.



43905

8

50 x 2 x 0.75 / 50 x 2 x 1 / 50 x 2 x 1.5 / 50 x 2 x 2.5

4–16 mm², 100 units, DIN colour code, in dispenser

C000C100

Order-No.



43903

8

50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²

4–16 mm², 100 units, colour code 1 (FR) in dispenser

C000A100

Order-No.




43899

8

50 x 4 mm² / 20 x 6 mm² / 20 x 10 mm² / 10 x 16 mm²



Wire end sleeves with plastic collar set



100 units, colour code 1 (FR) / DIN

C000A

Order-No.		mm²	AWG	D1	D2	L1	L2	S1	S2	↓	
43911	white	0.5	20	1	2.6	14	8	0.15	0.25	100	40
43996	grey	0.75	18	1.2	2.8	14	8	0.15	0.25	100	40
43913	red	1	18	1.4	3	14	8	0.15	0.25	100	60
43914	black	1.5	16	1.7	3.5	14	8	0.15	0.25	100	60
43927	blue	2.5	14	2.2	4.2	14	8	0.15	0.25	100	50
43928	grey	4	12	2.8	4.8	17	10	0.2	0.3	100	30
43932	yellow	6	10	3.5	6.3	20	12	0.2	0.3	100	20
43933	red	10	8	4.5	7.6	22	12	0.2	0.4	50	20
43934	blue	16	6	5.8	8.8	24	12	0.2	0.4	50	20

100 units, colour code 1 (FR)

C000A

Order-No.		mm²	AWG	D1	D2	L1	L2	S1	S2	↓	
43908	brown•	0.14	26	0.7	1.6	12	6	0.15	0.25	100	40
43909	purple•	0.25	24	0.75	1.8	12	6	0.15	0.25	100	40
43910	pink•	0.34	22	0.8	2	12	6	0.15	0.25	100	40
43911	white	0.5	20	1	2.6	14	8	0.15	0.25	100	40
43912	blue	0.75	18	1.2	2.8	14	8	0.15	0.25	100	40
43913	red	1	18	1.4	3	14	8	0.15	0.25	100	60
43914	black	1.5	16	1.7	3.5	14	8	0.15	0.25	100	60
43915	grey	2.5	14	2.2	4.2	14	8	0.15	0.25	100	50
43916	orange	4	12	2.8	4.8	17	10	0.2	0.3	100	30
43917	green	6	10	3.5	6.3	20	12	0.2	0.3	100	20
43918	brown	10	8	4.5	7.6	22	12	0.2	0.4	50	20
43919	ivory	16	6	5.8	8.8	24	12	0.2	0.4	50	20

•Extension size for DIN dimensions

INFOBOX:


**Wire end ferrules with
plastic collar**

mm ²	mm	↓	()	Colour code DIN		Colour code 1 (FR)	
				Orderr-No.	Order-No.	Order-No.	Order-No.
0,14	6	100	40			brown•	43908
0,25	6	100	40			purple•	43909
0,34	6	100	40			pink•	43910
0,50	8	100	40	white	43911	white	43911
0,75	8	100	40	grey	43996	blue	43912
1,00	8	100	60	red	43913	red	43913
1,50	8	100	60	black	43914	black	43914
2,50	8	100	50	blue	43927	grey	43915
4,00	10	100	30	grey	43928	orange	43916
6,00	12	100	20	yellow	43932	green	73917
10,00	12	50	20	red	43933	brown	43918
16,00	12	50	20	blue	43934	ivory	43919

• Additional dimension. Non-DIN size.



Twin wire end ferrules with plastic collar

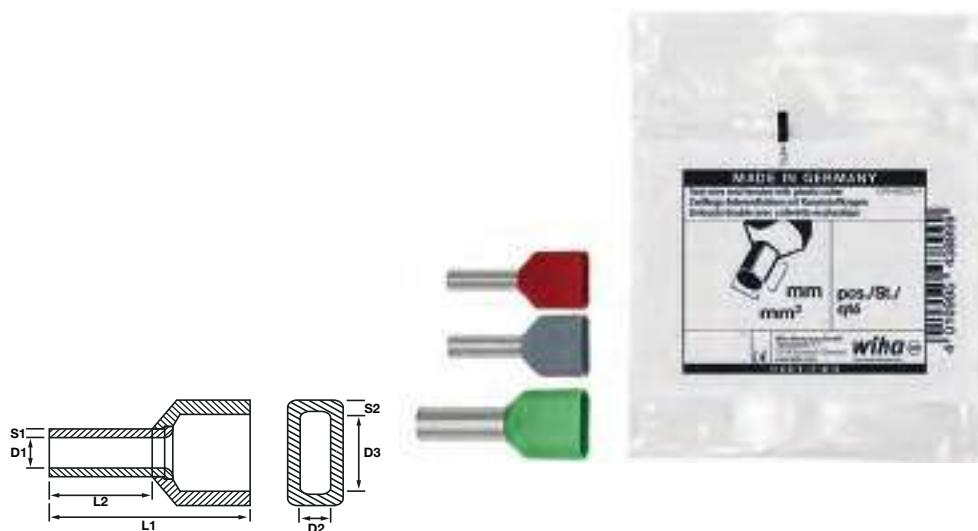

100 units, colour code 1 (FR) & DIN

C001A

Order-No.		mm ²	AWG	D1	D2	D3	L1	L2	S1	S2	↓	
43935	white	2 x 0.5	2 x 20	1.4	2.5	4.7	15	8	0.15	0.25	100	30
43951	grey	2 x 0.75	2 x 18	1.7	2.8	5	15	8	0.15	0.25	100	20
43937	red	2 x 1	2 x 18	1.95	3.4	5.4	15	8	0.15	0.3	100	20
43938	black	2 x 1.5	2 x 16	2.2	3.6	6.6	16	8	0.15	0.3	100	30
43947	blue	2 x 2.5	2 x 14	2.8	4.2	7.8	18.5	10	0.2	0.3	100	20
43948	grey	2 x 4	2 x 12	3.7	4.9	8.8	23	12	0.2	0.4	50	20
43952	yellow	2 x 6	2 x 10	4.8	6.9	10	26	14	0.2	0.4	50	15
43953	red	2 x 10	2 x 8	6.4	7.2	13	26	14	0.2	0.4	25	20

100 units, colour code 1 (FR) & DIN

C001A

Order-No.		mm ²	AWG	D1	D2	D3	L1	L2	S1	S2	↓	
43935	white	2 x 0.5	2 x 20	1.4	2.5	4.7	15	8	0.15	0.25	100	30
43936	blue	2 x 0.75	2 x 18	1.7	2.8	5	15	8	0.15	0.25	100	20
43937	red	2 x 1	2 x 18	1.95	3.4	5.4	15	8	0.15	0.3	100	20
43938	black	2 x 1.5	2 x 16	2.2	3.6	6.6	16	8	0.15	0.3	100	30
43939	grey	2 x 2.5	2 x 14	2.8	4.2	7.8	18.5	10	0.2	0.3	100	20
43940	orange	2 x 4	2 x 12	3.7	4.9	8.8	23	12	0.2	0.4	50	20
43941	green	2 x 6	2 x 10	4.8	6.9	10	26	14	0.2	0.4	50	15
43942	brown	2 x 10	2 x 8	6.4	7.2	13	26	14	0.2	0.4	25	20

INFOBOX:

**Twin wire end ferrules
with plastic collar**

mm ²	mm	↓	(	Colour code DIN	Best.-Nr.	Colour code 1 (FR)	Best.-Nr.		
2 x 0,50	8	100	30		white	43935		white	43935
2 x 0,75	8	100	20		grey	43951		blue	43936
2 x 1,00	8	100	20		red	43937		red	43937
2 x 1,50	8	100	30		black	43938		black	43938
2 x 2,50	10	100	20		blue	43947		grey	43939
2 x 4,00	12	50	20		grey	43948		orange	43940
2 x 6,00	14	50	15		yellow	43952		green	43941
2 x 10,00	14	25	20		red	43953		brown	43942



type cable socket, ring-shaped, insulated




100 units as per DIN

C020

Order-No.	Color	mm ²	AWG	Thread size	D1	D2	L1	B	↓	Box
43954	red	0.5 - 1 mm ²	22 - 16	M4	4.1	4.3	18	8	100	15
43956	red	0.5 - 1 mm ²	22 - 16	M5	4.1	5.3	19	10	100	15
43958	red	0.5 - 1 mm ²	22 - 16	M6	4.1	6.5	21	11	100	15
43955	blue	1.5 - 2.5 mm ²	16 - 14	M4	4.5	4.3	18	8	100	15
43957	blue	1.5 - 2.5 mm ²	16 - 14	M5	4.5	5.3	20	10	100	15
43959	blue	1.5 - 2.5 mm ²	16 - 14	M6	4.5	6.5	22	11	100	15
43960	yellow	4 - 6 mm ²	12 - 10	M6	6.5	6.5	23	11	50	15
43961	yellow	4 - 6 mm ²	12 - 10	M8	6.5	8.4	26	14	50	15

Crimp-type cable socket, fork-shaped, insulated

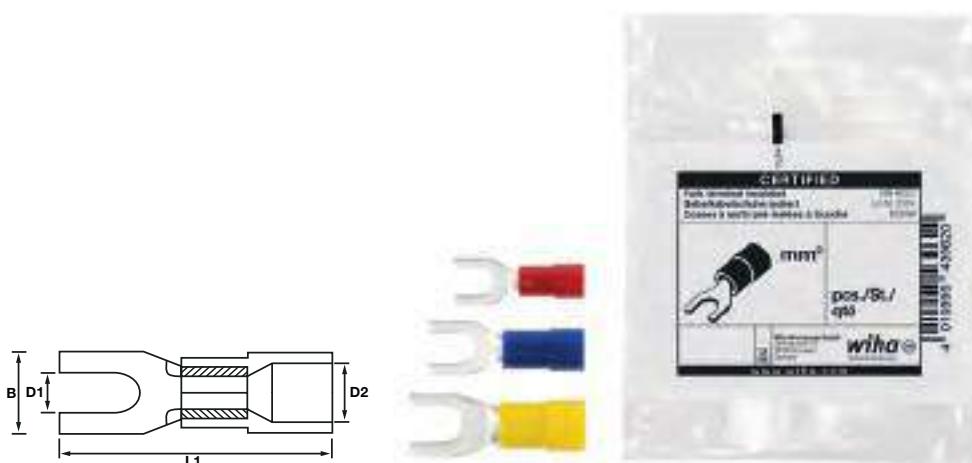

100 units as per DIN

C040

Order-No.	Color	mm ²	AWG	Thread size	D1	D2	L1	B	↓	Box
43962	red	0.5 - 1 mm ²	22 - 16	M4	4.1	4.3	18	8	100	15
43963	blue	1.5 - 2.5 mm ²	16 - 14	M4	4.5	4.3	18	8	100	15
43964	yellow	4 - 6 mm ²	12 - 10	M5	6.5	5.3	22	10	50	15

Butt connectors, insulated

Technical drawing showing dimensions L1, D1, and D2.



100 units as per DIN

C101

Order-No.		mm ²	AWG	D1	D2	L1		
43965	red	0.5 - 1 mm ²	22 - 16	4.1	1.6	26	100	15
43966	blue	1.5 - 2.5 mm ²	16 - 14	4.5	2.3	26	100	15
43967	yellow	4 - 6 mm ²	12 - 10	6.5	3.6	28	50	15

Female blade connectors, insulated

Technical drawing showing dimensions L1, L2, and D1.



100 units as per DIN

C141

Order-No.		mm ²	AWG		D1	L1	L2		
43968	red	0.5 - 1 mm ²	22 - 16	6.3 x 0.8 mm	3.5	21	7.8	100	15
43969	blue	1.5 - 2.5 mm ²	16 - 14	6.3 x 0.8 mm	4.3	21	7.8	100	15
43970	yellow	4 - 6 mm ²	12 - 10	6.3 x 0.8 mm	6.2	23.8	7.8	50	15



Female blade connectors, fully insulated



100 units as per DIN

C146

Order-No.	Color	mm ²	AWG	Pin	D1	L1	L2	↓	Box
43971	red	0.5 - 1 mm ²	22 - 16	6.3 x 0.8 mm	3.5	21.5	6.8	100	15
43972	blue	1.5 - 2.5 mm ²	16 - 14	6.3 x 0.8 mm	4.3	21.8	6.8	100	15
43973	yellow	4 - 6 mm ²	12 - 10	6.3 x 0.8 mm	5.8	25	6.8	50	15

Male blade connectors, insulated



100 units as per DIN

C161

Order-No.	Color	mm ²	AWG	Pin	D1	L1	↓	Box
43974	red	0.5 - 1 mm ²	22 - 16	6.3 x 0.8 mm	3.5	21.5	100	15
43975	blue	1.5 - 2.5 mm ²	16 - 14	6.3 x 0.8 mm	4.3	21.3	100	15
43976	yellow	4 - 6 mm ²	12 - 10	6.3 x 0.8 mm	6.2	24	50	15



Which page is my product on?




Screwdrivers, torque tools

Screwdrivers

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Screwdriver SoftFinish®	●	●		●		●	●	●
SoftFinish® screwdriver with fixing function	●	●						
SoftFinish® screwdriver with mm scale	●	●		●				
SoftFinish® Stubby screwdriver	●	●		●				
Screwdriver MicroFinish®	●	●		●		●		
Pocket screwdrivers	●							
PicoFinish® fine screwdriver	●	●		●		●		●
Screwdriver SoftFinish® electric slimFix	●	●	●	●	●	●	●	
Screwdriver SoftFinish® electric	●	●	●	●	●	●	●	
Bit slimBit electric	●	●	●	●	●	●	●	
PicoFinish® electric fine screwdriver	●	●						
Voltage tester	●							
Screwdriver SoftFinish® ESD	●	●		●		●		
Fine screwdriver PicoFinish® ESD	●	●		●		●		●

Torque tools

	Slotted	Phillips PH	Xeno SL/PH	Pozidriv PZ	Xeno SL/PZ	TORX®	TORX® Tamper Resistant	TORX PLUS®
Variably adjustable torque screwdriver	●	●		●		●		●
Torque screwdriver firmly pre-set	●	●		●		●		●
Electric torque screwdriver	●	●	●	●	●	●		
Bit slimBit electric	●	●	●	●	●	●		
Torque screwdriver with T-handle						●		●
TorqueFix® torque screwdriver with key handle						●		●

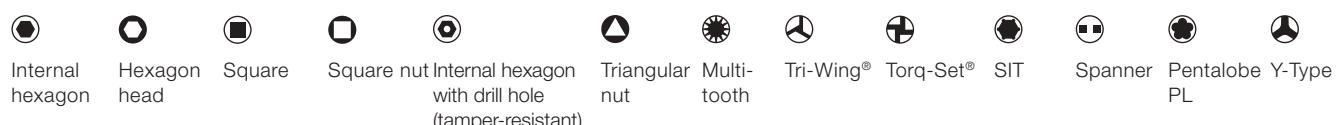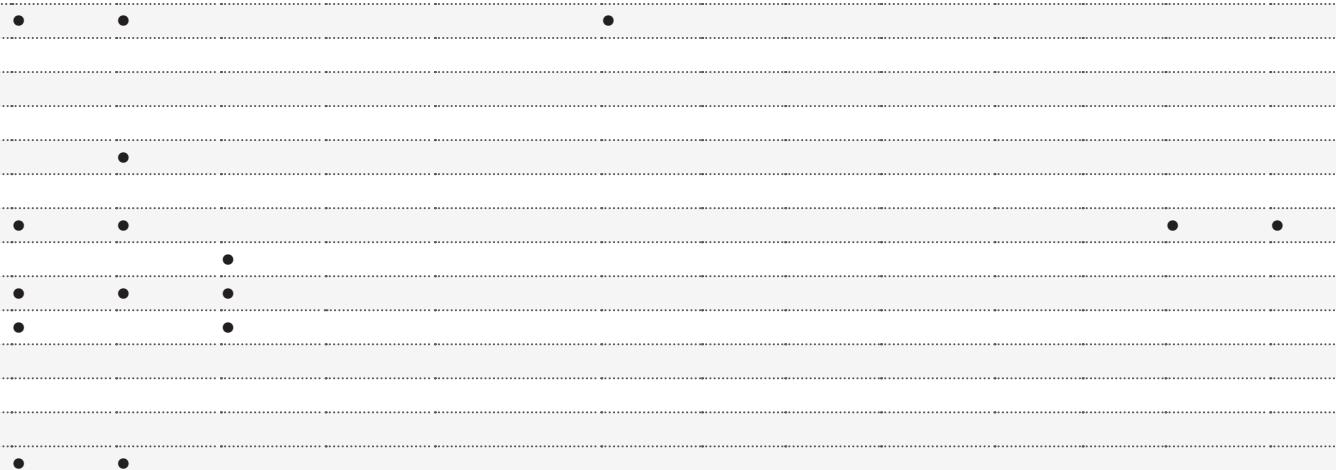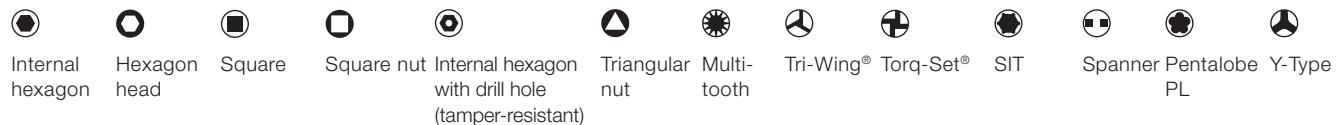

Which page is my product on?

Multi-tools, L-keys, bits

Multitools



	⊖	⊕ PH	⊕ Xeno SL/PH	⊗ Pozidriv PZ	⊗ Xeno SL/PZ	★ TORX®	★ TORX® Tamper Resistant	● TORX PLUS®
--	---	------	--------------	---------------	--------------	---------	--------------------------	--------------

Screwdriver with bit magazine LiftUp electric	●	●		●	●	●		
Screwdriver with bit magazine 26one®	●	●		●		●		
Screwdriver with LiftUp 25 + 70 bit magazine	●	●		●		●		
Screwdriver with bit magazine	●	●		●		●		
Screwdriver with bit magazine Stubby	●	●		●		●		
Multitool PocketStar L-key	●	●				●	●	
Screwdriver with interchangeable blade SYSTEM 6	●	●		●		●		
Screwdriver with interchangeable blade SYSTEM 4	●	●		●		●		

L-keys



	⊖	⊕ PH	⊕ Xeno SL/PH	⊗ Pozidriv PZ	⊗ Xeno SL/PZ	★ TORX®	★ TORX® Tamper Resistant	● TORX PLUS®
--	---	------	--------------	---------------	--------------	---------	--------------------------	--------------

L-keys						●	●	●
L-key set in ErgoStar holder						●		
L-key set in ProStar holder						●		
L-key set in Compact holder								
L-key set in Classic holder						●	●	●
L-key with T-handle ComfortGrip						●		
L-key with Classic T-handle						●		●
L-key with T-handle electric								
L-key with key handle						●		●
L-key with flag handle						●		●

Bits



	⊖	⊕ PH	⊕ Xeno SL/PH	⊗ Pozidriv PZ	⊗ Xeno SL/PZ	★ TORX®	★ TORX® Tamper Resistant	● TORX PLUS®
--	---	------	--------------	---------------	--------------	---------	--------------------------	--------------

TY-Bit		●		●		●		
T-Bit		●		●		●		
Y-Bit		●		●		●		
Bits with MagicRing®	●	●		●		●	●	●
Bit with thread	●	●	●	●	●	●	●	●
Standard bit in C4 size				●		●		
Slotted			●	●		●		
Phillips PH	●	●				●		

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with Triangular drill hole (tamper-resistant)	Triangular nut	Multitooth Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe	Y-Type PL

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multitooth Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe	Y-Type PL

Internal hexagon	Hexagon head	Square	Square nut	Internal hexagon with drill hole (tamper-resistant)	Triangular nut	Multitooth Tri-Wing®	Torq-Set®	SIT	Spanner	Pentalobe	Y-Type PL



Order number register

Order no.	Page						
00		00706	147	00857	142	00975	226
00456	142	00707	147	00858	142	00977	226
00576	203	00708	147	00859	142	00978	226
00577	203	00709	147	00860	142	00980	226
00578	203	00711	147	00861	142	00982	226
00579	203	00712	147	00862	142	00983	226
00580	203	00713	147	00863	142	00985	226
00582	203	00731	152	00864	142	00986	226
00583	203	00732	152	00865	142	00988	226
00584	203	00733	152	00866	142	00989	226
00585	203	00734	152	00867	142	00990	226
00586	203	00735	152	00868	142	00991	226
00587	203	00736	152	00877	141	00993	226
00597	203	00737	152	00878	141	00994	226
00598	203	00738	152	00879	141	00995	226
00599	203	00739	152	00880	141	01	
00600	203	00740	152	00881	141	01005	226
00601	203	00754	147	00882	141	01006	226
00602	203	00756	147	00894	228	01007	226
00603	203	00757	147	00895	228	01008	226
00610	200	00759	147	00896	228	01018	149
00613	200	00760	147	00897	228	01020	149
00616	200	00762	147	00904	225	01021	149
00623	195	00763	147	00905	225	01022	149
00629	198	00764	152	00906	225	01023	149
00630	198	00765	152	00907	225	01024	149
00631	198	00766	152	00908	225	01025	149
00632	198	00767	152	00909	225	01026	149
00635	198	00768	147	00910	225	01027	149
00636	198	00770	147	00911	225	01028	149
00637	198	00772	147	00912	225	01029	149
00638	198	00774	147	00913	225	01030	149
00639	198	00776	152	00914	225	01031	149
00654	198	00777	152	00915	225	01032	149
00655	198	00778	152	00916	225	01033	149
00656	198	00779	152	00917	225	01034	144
00657	198	00819	141	00918	225	01076	149
00658	198	00820	141	00919	225	01077	149
00665	198	00821	141	00921	225	01078	149
00666	198	00822	141	00922	225	01079	149
00679	154	00823	141	00923	225	01081	149
00683	154	00824	141	00924	225	01092	150
00684	147	00825	141	00926	225	01093	150
00685	147	00826	141	00928	225	01094	150
00686	147	00827	141	00929	225	01095	150
00687	147	00828	141	00930	225	01096	150
00689	147	00829	141	00931	225	01097	150
00690	147	00830	141	00933	225	01098	150
00691	147	00831	141	00934	225	01121	221
00692	147	00832	141	00937	225	01122	221
00694	147	00833	133	00953	216	01123	221
00695	147	00834	133	00965	226	01124	221
00696	147	00846	141	00966	226	01126	221
00697	147	00847	141	00967	226	01128	221
00698	147	00848	141	00968	226	01130	221
00700	147	00849	141	00969	226	01131	221
00701	147	00850	141	00971	226	01132	221
00702	147	00853	142	00972	226	01133	221
00703	147	00855	142	00973	226	01134	221
00704	147	00856	142	00974	226	01135	221

Order no.	Page						
01136	221	01345	228	01681	246	01913	261
01137	221	01348	217	01688	246	01919	261
01138	221	01350	229	01689	246	01922	259
01139	221	01351	229	01690	246	01923	259
01140	221	01352	229	01703	247	01924	259
01141	221	01353	229	01704	247	01926	259
01142	221	01354	229	01705	247	01927	259
01143	221	01355	229	01706	247	01930	259
01285	148	01356	229	01707	247	01933	258
01286	148	01391	220	01708	247	01935	258
01287	148	01392	219	01709	247	01937	256
01288	148	01393	219	01710	247	01938	256
01289	148	01395	219	01711	246	01939	256
01290	148	01396	219	01712	246	01940	256
01291	148	01398	219	01713	246	01942	256
01292	148	01400	219	01714	246	01943	256
01293	148	01402	219	01715	246	01945	256
01294	148	01404	219	01716	246	01946	256
01295	148	01406	219	01717	246	01947	257
01296	148	01408	219	01718	246	02	
01297	148	01416	209	01719	246	02091	328
01299	143	01418	209	01720	246	02092	328
01300	148	01420	210	01721	246	02093	328
01301	148	01422	220	01722	246	02094	328
01302	148	01423	220	01723	246	02095	328
01303	148	01424	220	01724	246	02096	328
01304	148	01425	220	01726	246	02097	328
01305	148	01426	220	01727	246	02098	328
01306	148	01427	220	01728	246	02099	328
01310	223	01428	220	01729	246	02101	328
01311	223	01429	220	01730	246	02102	329
01312	223	01430	220	01731	246	02103	329
01313	223	01431	220	01732	246	02104	329
01314	223	01432	220	01733	246	02105	329
01315	223	01433	220	01734	247	02106	329
01316	223	01434	220	01735	247	02107	329
01317	223	01435	150	01736	247	02108	329
01318	223	01436	150	01737	247	02109	329
01319	223	01437	150	01738	247	02110	329
01320	223	01438	150	01739	247	02111	329
01321	223	01439	150	01740	247	02113	329
01322	223	01440	150	01790	250	02114	329
01323	223	01443	150	01791	250	02115	329
01324	223	01475	262	01792	250	02116	329
01326	214	01476	262	01793	250	02117	329
01328	228	01479	262	01794	250	02122	328
01329	228	01481	263	01795	250	02123	328
01330	228	01508	155	01796	250	02124	328
01331	228	01537	154	01798	250	02125	328
01332	228	01538	154	01799	250	02126	328
01333	228	01539	154	01800	250	02127	328
01334	228	01548	154	01803	250	02128	328
01335	228	01623	246	01805	250	02129	328
01336	228	01624	246	01808	250	02292	209
01337	228	01626	246	01809	250	02568	155
01338	228	01627	246	01811	250	02802	226
01339	228	01649	246	01812	250	02803	226
01340	228	01657	246	01894	261	02804	226
01341	228	01658	246	01895	261	02805	226
01343	228	01659	246	01910	261	02806	226



Order number register

Order no.	Page						
02807	226	03853	160	04925	246	07855	248
02808	226	03854	160	04926	246	07856	248
02809	226	03868	220	04927	246	07857	248
02810	226	03869	220	04928	246	07859	248
02811	226	03870	220	04929	246	07860	248
02819	227	03871	220	04930	246	07861	248
02820	227	03872	220	04931	246	07869	261
02821	227	03873	220	05		07922	219
02822	227	03874	220	05271	142	07943	244
02823	227	03875	220	05298	246	08	
02824	227	03876	220	05300	246	08047	249
02836	150	03879	210	05301	252	08048	249
02837	150	03882	199	05302	252	08049	249
02838	150	03883	199	05303	252	08056	249
02839	150	03988	160	05638	220	08057	249
02840	150	03992	210	05799	250	08058	249
02939	210	04		05800	250	08065	249
03		04009	250	06		08066	249
03106	148	04010	250	06059	220	08067	249
03107	148	04011	247	06218	221	08068	249
03108	148	04059	250	06358	220	08069	249
03115	246	04096	225	06359	220	08070	249
03117	246	04099	225	06360	220	08179	158
03186	203	04105	225	06361	220	08182	158
03223	151	04108	225	06362	220	08183	158
03224	151	04111	225	06363	220	08184	158
03225	151	04126	250	06364	220	08185	158
03226	151	04127	250	06365	220	08186	158
03228	151	04176	250	06366	220	08421	248
03230	151	04194	252	06367	220	08422	248
03231	151	04195	252	06368	220	08423	248
03232	151	04196	252	06369	220	08424	248
03237	151	04197	252	06370	220	08425	248
03238	151	04198	252	06371	220	08426	248
03239	151	04204	258	06378	211	08900	199
03245	151	04362	258	06379	210	08901	199
03246	151	04508	258	06382	211	08902	199
03247	151	04509	258	06386	210	08903	199
03591	195	04510	258	06634	247	08904	199
03723	209	04511	258	06635	247	08905	199
03724	229	04512	258	06636	247	08906	199
03725	229	04513	258	06637	252	08907	199
03726	229	04514	258	06638	252	08908	199
03727	229	04631	258	06639	252	08909	199
03728	229	04632	258	06725	160	08911	199
03729	229	04633	258	06726	160	09	
03730	229	04634	258	06727	160	09195	203
03731	229	04635	258	06728	160	09393	244
03738	147	04636	258	06729	160	20	
03739	147	04637	258	06730	160	20218	252
03760	141	04638	258	06731	160	20219	252
03761	141	04639	258	06732	160	20220	252
03762	141	04640	258	06888	250	20221	252
03764	223	04670	257	06889	250	20222	252
03847	160	04671	257	07		20223	252
03848	160	04677	256	07152	143	20224	252
03849	160	04678	256	07153	143	20549	218
03850	160	04684	258	07155	143	20550	218
03851	160	04685	258	07185	208	20551	218
03852	160	04918	229	07192	208	20552	218

Order no.	Page						
20553	218	23040	192	24313	222	26	
20554	194	23041	192	24314	222	26000	252
20555	247	23047	190	24315	222	26002	252
20556	247	23049	190	24316	222	26045	247
20557	247	23051	190	24317	222	26047	174
20558	247	23053	190	24318	222	26048	174
20559	247	23145	252	24319	222	26049	174
20560	247	23147	252	24320	222	26051	174
20570	218	23149	252	24321	222	26052	174
20783	194	23151	252	24322	222	26053	174
21		23159	155	24323	222	26058	176
21045	252	23173	246	24324	222	26059	176
21047	252	23175	246	24325	222	26060	176
21248	144	23177	246	24341	218	26061	176
21249	144	23179	246	24506	143	26062	176
21250	145	23181	246	24515	222	26063	176
21251	145	23183	246	24517	222	26064	176
21960	225	23185	246	24519	222	26065	176
21962	225	23187	246	24521	222	26066	176
22		23189	246	24523	222	26067	176
22096	216	23191	246	24525	222	26068	176
22168	225	23193	246	24527	222	26069	176
22170	225	23195	252	24529	222	26070	176
22172	225	23197	252	24531	222	26071	176
22174	225	23199	252	24533	222	26072	176
22436	158	23201	252	24733	248	26073	176
22509	250	23203	252	24742	248	26077	148
22510	250	23205	252	24746	248	26079	148
22511	250	23207	252	24748	248	26081	148
22512	250	23209	252	24750	248	26083	148
22591	247	23211	252	24851	208	26085	148
22592	247	23213	250	24852	214	26091	148
22593	247	23215	250	24867	252	26093	148
22594	247	23217	250	25		26095	148
22595	247	23219	250	25097	246	26097	148
22596	252	23221	250	25128	191	26099	148
22597	252	23223	250	25130	191	26101	148
22598	252	23225	250	25164	191	26103	148
22599	252	23226	250	25166	191	26105	148
22600	252	23227	250	25293	190	26107	148
22603	247	23228	250	25295	190	26109	148
22604	247	24		25477	133	26111	148
22605	247	24107	223	25560	247	26113	143
22606	247	24109	223	25561	247	26122	203
22607	247	24111	223	25562	247	26123	203
22608	247	24113	223	25563	247	26124	203
22655	248	24115	223	25564	247	26127	174
22955	247	24117	223	25572	247	26128	174
22956	247	24119	223	25624	217	26129	174
22957	247	24121	223	25625	217	26130	174
22958	247	24123	223	25679	248	26131	174
22959	247	24189	208	25681	248	26133	174
22960	247	24302	218	25739	252	26135	224
22961	247	24303	218	25740	252	26136	224
22962	247	24304	218	25741	252	26137	224
23		24305	218	25742	252	26138	224
23031	192	24306	218	25874	262	26139	224
23033	192	24307	218	25994	246	26140	224
23035	193	24308	218	25996	246	26146	144
23037	193	24312	214	25998	246	26148	176



Order number register

Order no.	Page						
26151	176	26234	149	26457	148	26704	294
26152	176	26247	216	26458	148	26705	278
26154	176	26248	216	26461	174	26706	295
26155	176	26249	247	26462	174	26707	294
26156	176	26250	246	26463	174	26708	278
26157	176	26252	245	26464	174	26709	295
26158	176	26253	245	26509	325	26710	294
26159	176	26259	148	26510	327	26711	278
26164	224	26260	148	26511	327	26712	295
26165	224	26261	217	26512	327	26713	295
26166	224	26277	176	26513	327	26714	278
26167	224	26278	176	26514	327	26715	295
26168	224	26279	176	26544	176	26716	295
26169	224	26303	148	26582	326	26717	278
26170	224	26304	148	26611	325	26718	296
26171	224	26305	148	26612	325	26719	296
26172	224	26307	148	26613	325	26720	279
26173	224	26309	247	26614	325	26721	296
26174	224	26327	174	26615	327	26722	296
26175	224	26328	148	26616	327	26723	297
26176	224	26329	148	26618	327	26724	296
26177	224	26330	148	26620	327	26725	297
26178	224	26331	148	26625	166	26726	296
26179	263	26332	148	26626	166	26727	279
26181	229	26333	148	26627	166	26728	280
26182	229	26346	246	26629	181	26729	280
26183	229	26347	246	26640	326	26730	298
26184	229	26348	246	26641	326	26731	298
26185	229	26349	246	26642	326	26732	280
26186	229	26350	246	26643	326	26733	299
26187	229	26351	246	26644	326	26734	299
26188	229	26352	247	26645	326	26735	280
26190	148	26353	247	26646	326	26745	276
26191	148	26354	247	26647	326	26755	104
26192	148	26355	247	26648	326	26757	302
26193	148	26356	247	26649	325	26758	302
26194	148	26417	327	26650	325	26759	302
26195	148	26418	327	26651	325	26760	300
26196	176	26419	327	26652	325	26761	300
26197	176	26420	327	26653	325	26762	300
26198	176	26421	327	26654	325	26763	300
26199	176	26422	326	26655	325	26764	301
26200	176	26423	326	26656	325	26765	301
26212	150	26424	326	26657	326	26766	300
26213	150	26425	326	26658	326	26767	301
26214	150	26426	326	26659	326	26771	302
26216	150	26427	326	26660	326	26772	302
26217	150	26428	326	26661	326	26773	302
26221	176	26429	326	26663	326	26774	302
26222	176	26430	326	26664	326	26775	302
26223	176	26431	325	26665	326	26776	302
26224	176	26432	325	26666	326	26777	302
26225	176	26433	325	26667	327	26778	302
26227	176	26434	325	26668	327	26779	302
26228	176	26435	325	26669	327	26780	302
26229	177	26436	325	26670	327	26781	305
26230	149	26437	325	26671	327	26782	305
26231	149	26439	325	26672	327	26783	305
26232	149	26454	147	26674	326	26784	305
26233	149	26455	147	26703	295	26785	305

Order no.	Page						
26786	305	26959	228	27374	302	27627	198
26787	305	26960	228	27375	302	27628	198
26788	305	26964	152	27376	302	27629	198
26789	305	26965	152	27377	302	27630	198
26790	305	26966	152	27378	302	27631	198
26791	305	26967	152	27379	302	27632	198
26792	305	26968	152	27380	302	27633	198
26793	290	26969	152	27381	300	27634	198
26794	305	26970	152	27382	300	27641	158
26795	305	26971	152	27383	301	27712	197
26796	305	26972	152	27384	301	27713	196
26797	305	26973	152	27388	316	27736	147
26799	312	27		27390	317	27737	147
26801	317	27055	333	27391	316	27738	147
26802	312	27057	333	27393	316	27739	147
26804	312	27058	333	27395	316	27740	147
26806	312	27059	333	27397	317	27741	147
26808	309	27061	333	27398	317	27742	147
26812	316	27062	333	27399	294	27743	147
26813	317	27064	247	27418	278	27744	147
26814	309	27065	247	27419	278	27745	147
26815	316	27066	247	27420	278	27746	143
26816	309	27067	247	27421	278	27753	147
26818	316	27077	249	27422	279	27754	147
26821	310	27079	176	27423	279	27755	147
26822	310	27082	332	27424	280	27756	147
26825	316	27083	332	27425	280	27757	147
26826	310	27144	158	27426	280	27758	147
26830	317	27145	158	27427	280	27811	147
26831	310	27146	158	27431	276	27812	176
26832	311	27147	158	27437	282	27813	176
26833	317	27148	158	27439	312	27814	176
26835	311	27149	158	27440	312	27815	176
26839	311	27150	158	27441	312	27816	176
26840	311	27151	158	27442	309	27817	176
26845	283	27252	157	27443	309	27818	176
26846	283	27253	157	27444	309	27820	200
26847	282	27256	247	27445	310	27892	257
26850	289	27257	247	27446	310	27893	257
26852	274	27258	247	27447	310	27894	257
26853	288	27259	247	27448	310	27895	257
26854	289	27260	247	27449	311	27896	257
26864	177	27325	295	27450	311	27897	257
26865	181	27326	317	27452	311	27898	257
26866	181	27327	294	27453	311	27899	257
26888	174	27328	278	27501	302	27900	257
26889	176	27329	312	27502	302	27901	257
26893	173	27336	295	27503	302	27905	312
26901	174	27337	295	27504	302	27928	227
26920	155	27340	296	27526	177	27929	227
26925	174	27341	296	27530	246	27930	227
26928	158	27342	297	27606	155	27931	227
26929	158	27343	297	27614	229	27932	227
26931	147	27344	298	27615	229	27933	227
26953	228	27345	299	27616	229	27934	227
26954	228	27350	300	27617	229	27935	227
26955	228	27351	301	27618	229	27936	190
26956	228	27368	283	27619	229	27963	257
26957	228	27372	302	27620	229	27964	228
26958	228	27373	302	27621	229	27965	228



Order number register

Order no.	Page	Order no.	Page	Order no.	Page	Order no.	Page
27966	228	29159	156	30700	141	32304	251
27967	228	29162	156	30701	141	32305	251
27968	228	29163	156	30715	141	32306	251
27970	228	29164	156	30716	141	32307	251
27971	228	29165	156	30824	113	32308	251
28		29228	178	30826	294	32309	251
28005	148	29229	178	30852	176	32310	263
28026	257	29230	178	30978	294	32311	263
28027	257	29231	178	30979	294	32318	313
28051	329	29232	178	31		32319	295
28052	329	29233	178	31233	221	32320	295
28058	257	29234	178	31234	221	32322	296
28330	286	29236	178	31235	221	32323	296
28372	224	29416	241	31236	221	32324	297
28373	224	29417	241	31237	221	32325	313
28374	224	29420	288	31238	221	32326	313
28375	224	29422	332	31239	221	32327	313
28376	224	29425	305	31240	221	32328	297
28377	224	29427	305	31241	221	32329	313
28402	306	29428	305	31242	221	32330	298
28481	252	29429	305	31243	221	32332	299
28691	172, 179	29435	306	31244	221	32334	314
28734	179	29436	306	31432	158	32335	314
28735	179	29437	306	31439	332	32336	314
28736	179	29441	306	31496	198	32338	314
28737	179	29442	306	31497	197	32340	314
28738	179	29443	306	31498	202	32342	300
28739	179	29463	262	31499	202	32343	315
28740	179	29466	134	31771	142	32344	315
28741	179	29467	176	31863	141	32345	283
28742	179	29471	219	31901	158	32346	314
28743	179	29472	219	31957	250	32347	313
28744	179	29473	219	31958	250	32349	308
28745	179	29474	219	31959	250	32352	301
28746	179	29475	219	31960	250	32383	147
28747	179	29485	307	31961	250	32384	147
28748	179	29486	307	31962	250	32386	221
28749	179	29487	307	32		32387	221
28756	179	29544	249	32055	248	32388	221
28757	179	29550	306	32070	248	32389	221
28758	179	29553	176	32071	248	32390	221
28760	148	29554	176	32105	250	32391	221
28761	148	29555	176	32160	262	32392	221
28762	148	29556	176	32161	263	32393	221
28763	148	29557	176	32201	142	32394	213
28764	148	29558	176	32250	147	32395	213
28765	148	29559	176	32251	147	32396	141
28766	148	29560	176	32252	147	32397	141
29		30		32253	147	32399	147
29133	156	30050	247	32254	147	32400	147
29134	156	30066	286	32255	147	32404	151
29135	156	30361	141	32256	147	32405	151
29136	156	30362	141	32264	148	32406	151
29137	156	30363	141	32265	148	32410	251
29138	156	30364	141	32281	133	32411	251
29139	156	30365	141	32282	133	32412	251
29149	156	30366	141	32298	196	32413	251
29150	156	30372	198	32299	251	32414	251
29151	156	30373	202	32302	251	32415	251
29158	156	30495	181	32303	251	32416	251

Order no.	Page						
32417	251	33717	251	34312	300	34736	214
32418	251	33718	251	34313	283	34740	212
32419	251	33719	251	34452	251	34745	142
32421	251	33720	251	34453	251	34746	248
32423	251	33721	251	34454	251	35	
32477	260	33722	251	34455	251	35378	142
32484	263	33723	251	34456	251	35389	132
32490	250	33724	251	34457	251	35390	140
32491	250	33725	251	34515	296	35391	140
32492	250	33726	251	34518	301	35392	140
32493	250	33727	251	34533	174	35393	140
32494	250	33728	251	34554	252	35394	140
32495	250	33729	251	34555	252	35395	140
32496	250	33730	251	34556	252	35396	140
32497	250	33731	251	34557	252	35397	151
32505	256	33732	251	34558	252	35398	151
32547	259	33736	189	34559	252	35400	256
32556	259	33738	189	34560	252	35401	256
32573	259	33740	189	34565	294	35402	256
32686	250	33741	189	34567	295	35403	256
32687	250	33743	189	34568	299	35446	140
32688	250	33744	189	34569	297	35456	250
32689	250	33746	189	34570	297	35457	250
32804	254	33749	221	34577	135	35462	280
32867	151	33753	212	34578	170, 138	35465	278
32868	151	33754	212	34579	170, 138	35477	279
32869	151	33764	189	34580	170, 138	35480	208
32870	151	33841	287	34581	170, 138	35481	208
32871	151	33842	288	34582	170, 138	35482	219
32901	189	33843	287	34583	170, 138	35483	219
32902	189	33844	287	34584	170, 138	35484	219
32903	189	33848	201	34585	170, 138	35485	219
33		33920	251	34586	170, 138	35486	219
33007	189	33921	251	34587	170, 138	35487	219
33008	189	33922	251	34588	170, 138	35488	219
33009	189	33923	251	34589	170, 138	35489	219
33178	279	33924	251	34590	170, 138	35490	219
33186	278	33925	251	34614	173	35501	140
33232	333	33926	251	34686	244	35502	140
33251	333	33927	251	34688	304	35503	140
33471	318	33928	251	34689	304	35504	140
33472	318	33929	251	34690	304	35505	140
33503	201	33930	251	34691	304	35506	138, 170
33507	308	33931	251	34692	304	35507	138, 170
33520	282	33932	251	34693	304	35508	138, 170
33521	309	33961	250	34694	304	35509	138, 170
33703	250	33962	250	34695	304	35510	138, 170
33704	250	33963	250	34696	304	35511	138, 170
33705	250	33964	250	34697	304	35709	248
33706	250	33965	250	34698	304	35820	318
33707	250	33966	250	34699	304	35832	248
33708	250	33969	103	34700	304	35834	249
33709	251	33970	112	34701	304	35861	286
33710	251	33971	112	34702	304	35862	286
33711	251	34		34703	304	35870	168
33712	251	34306	261	34704	304	36	
33713	251	34307	294	34705	304	36038	300
33714	251	34308	294	34706	304	36039	300
33715	251	34309	296	34707	304	36040	301
33716	251	34310	298	34708	290	36041	301

Order number register

Order no.	Page	Order no.	Page	Order no.	Page	Order no.	Page
36053	285	36462	215	38371	251	38801	180
36071	138, 170	36483	297	38372	251	38802	180
36072	151	36487	212	38552	275	38803	180
36079	168	36503	211	38556	180	38804	180
36082	253	36521	207	38557	180	38805	180
36085	151	36536	140	38558	180	38806	180
36086	253	36537	140	38600	189	38807	180
36092	261	36538	140	38601	189	38808	180
36093	261	36539	140	38605	189	38809	180
36094	261	36540	140	38606	189	38810	180
36112	261	36541	140	38610	186	38811	180
36114	194	36542	140	38611	186	38812	180
36189	298	36558	132	38612	186	38813	180
36193	253	36711	282	38613	186	38814	180
36218	304	36791	164	38616	180	38815	180
36219	304	36794	318	38617	180	38816	180
36220	304	36800	260	38618	180	38817	180
36221	304	36846	175	38619	180	38818	180
36222	304	36847	175	38620	180	38819	180
36223	304	36849	174	38621	180	38820	180
36224	304	36850	174	38622	180	38821	180
36225	304	36851	181	38627	275	38853	275
36226	304	36852	181	38631	282	38854	275
36229	175	36886	172	38632	282	38855	278
36230	175	36887	172	38637	274	38856	278
36231	175	36888	172	38649	248	38857	279
36233	175	36951	241	38650	248	38858	279
36234	175	36975	304	38651	248	38859	280
36235	175	36976	304	38652	248	38867	282
36236	175	36977	304	38653	248	38918	171
36237	175	36978	304	38654	248	38919	171
36238	175	36979	304	38656	248	38920	171
36239	175	36980	304	38657	248	38921	171
36240	175	36985	300	38658	248	38925	171
36272	304	36986	300	38659	248	38926	171
36275	248	36987	301	38660	248	38927	171
36280	248	36988	301	38676	253	38928	171
36282	248	36990	240	38677	253	38929	171
36285	249	37		38679	253	38930	171
36288	248	37067	332	38680	253	38931	171
36310	245	37147	138, 170	38681	253	38932	171
36320	175	37222	138, 170	38684	253	38933	171
36321	175	37223	138, 170	38685	253	38934	171
36327	251	37224	138, 170	38686	253	38935	171
36329	140	37225	138, 170	38687	253	38936	171
36330	140	37226	138, 170	38689	253	38981	291
36333	132	37227	138, 170	38690	253	38982	291
36388	111	37351	207	38706	253	38983	291
36389	102	37402	297	38707	253	38984	276
36390	111	37403	297	38708	253	38985	286
36414	177	37450	282	38709	253	38986	286
36415	177	38		38710	253	39	
36417	177	38020	103	38711	253	39008	328
36418	177	38060	291	38712	253	39010	328
36421	177	38074	166	38713	253	39012	328
36452	219	38189	291	38714	253	39014	328
36453	209	38190	291	38715	253	39017	328
36455	132	38191	276	38717	253	39019	328
36459	215	38362	132	38798	285	39021	328
36461	214	38370	251	38800	180	39022	328

Order no.	Page						
39029	242	39374	307	40628	255	41002	143
39037	242	39375	307	40629	255	41003	131
39039	242	39376	307	40630	255	41015	318
39040	242	39377	307	40631	255	41141	140
39041	242	39378	307	40632	255	41142	140
39045	242	39379	307	40633	255	41143	140
39049	243	39380	307	40634	255	41144	140
39056	243	39381	307	40635	255	41145	140
39057	243	39382	248	40636	255	41146	140
39059	243	39875	247	40637	255	41147	140
39060	243	39964	256	40638	255	41157	186
39076	194	39971	254	40639	255	41158	186
39078	242	40		40640	255	41159	138, 170
39083	243	40331	262	40641	255	41160	138, 170
39091	301	40342	287	40642	255	41220	303
39093	301	40401	219	40643	255	41221	303
39094	301	40402	219	40644	255	41222	318
39095	301	40403	219	40645	255	41230	134
39104	213	40404	219	40646	256	41231	130
39105	213	40405	219	40647	256	41232	130
39106	222	40406	219	40648	256	41233	130
39107	222	40407	219	40649	256	41234	186
39108	222	40408	219	40650	256	41235	186
39109	222	40409	219	40651	256	41241	102
39110	222	40410	209	40652	256	41245	132
39111	222	40411	209	40653	256	41246	286
39112	222	40461	249	40654	256	41261	293
39113	222	40462	249	40655	256	41266	293
39114	222	40463	249	40656	256	41272	293
39115	222	40464	249	40657	256	41273	292
39116	222	40465	249	40658	256	41274	277
39117	222	40523	99	40659	256	41275	277
39118	222	40600	255	40660	256	41277	293
39124	242	40601	255	40661	256	41278	292
39133	260	40602	255	40663	256	41279	277
39134	260	40603	255	40674	165	41280	277
39149	329	40604	255	40712	303	41286	124
39150	329	40605	255	40713	303	41289	330
39151	329	40606	255	40913	293	41301	293
39152	329	40607	255	40919	293	41307	293
39178	252	40608	255	40920	292	41309	277
39179	252	40609	255	40921	277	41310	277
39180	252	40610	255	40922	277	41311	293
39181	252	40611	255	40923	300	41317	293
39182	252	40612	255	40927	279	41318	292
39183	252	40613	255	40966	222	41319	277
39184	251	40614	255	40967	222	41320	277
39185	251	40615	255	40968	222	41321	293
39186	251	40616	255	40969	222	41327	293
39187	251	40617	255	40970	222	41329	277
39188	252	40618	255	40971	222	41330	277
39189	252	40619	255	40972	222	41341	167
39190	252	40620	255	40973	222	41342	167
39191	252	40621	255	40974	222	41343	167
39192	252	40622	255	40975	222	41344	167
39193	252	40623	255	40976	222	41345	167
39194	252	40624	255	40977	222	41476	167
39206	252	40625	255	40978	222	41477	167
39207	252	40626	255	40979	213	41478	167
39208	252	40627	255			41479	167



Order number register

Order no.	Page						
41483	206	41660	237	42116	232	42398	153
41585	240	41662	237	42117	232	42399	153
41586	240	41663	237	42118	232	42401	153
41587	240	41824	236	42119	233	42402	153
41588	240	41825	236	42120	233	42403	153
41589	240	41826	236	42121	233	42413	153
41590	240	41827	239	42122	233	42414	153
41591	240	41828	239	42123	233	42415	153
41592	240	41829	239	42124	233	42416	153
41593	240	41830	236	42125	233	42418	153
41594	240	41831	236	42126	233	42419	153
41596	240	41832	238	42127	233	42420	153
41597	240	41833	238	42128	233	42421	153
41598	237	41834	238	42129	233	42422	153
41599	237	41894	218	42130	233	42423	153
41600	237	41895	218	42131	233	42424	153
41601	237	41896	218	42132	233	42425	153
41602	237	41897	218	42133	233	42426	153
41603	237	41898	218	42134	233	42427	154
41604	237	41899	218	42135	234	42428	154
41605	237	41900	218	42136	234	42429	154
41606	237	41901	218	42137	234	42430	154
41607	237	41902	218	42138	234	42431	153
41609	237	41914	122	42139	234	42432	153
41610	237	41915	122	42149	235	42433	153
41611	237	41922	261	42150	235	42434	153
41612	237	41923	288	42162	284	42435	153
41613	237	41973	218	42292	237	42436	153
41614	237	41974	218	42293	237	42437	153
41621	237	41975	218	42294	240	42438	153
41622	237	41976	218	42295	240	42439	153
41623	237	41977	218	42301	237	42440	153
41624	239	41978	218	42302	237	42441	153
41625	239	41979	206	42303	240	42442	153
41626	239	42		42304	240	42443	154
41627	239	42062	284	42305	240	42444	154
41628	239	42068	332	42306	237	42445	154
41629	239	42071	330	42374	142	42446	154
41630	239	42074	331	42375	142	42447	154
41631	239	42086	126	42376	142	42448	154
41632	239	42096	235	42377	142	42449	154
41633	239	42097	233	42378	142	42450	154
41635	239	42098	234	42379	142	42451	154
41636	239	42099	232	42380	142	42452	154
41637	237	42100	235	42381	153	42453	154
41638	237	42101	235	42382	153	42454	154
41639	237	42102	235	42383	153	42455	154
41640	237	42103	235	42384	153	42464	153
41641	237	42104	235	42385	153	42465	153
41642	237	42105	235	42386	153	42466	153
41643	237	42106	235	42387	153	42467	153
41644	237	42107	235	42388	153	42468	153
41645	237	42108	235	42389	153	42469	153
41646	237	42109	235	42390	153	42470	153
41648	237	42110	235	42391	153	42471	142
41649	237	42111	235	42392	153	42474	153
41650	237	42112	235	42393	153	42475	153
41651	237	42113	235	42394	153	42476	153
41652	237	42114	232	42395	153	42477	153
41653	237	42115	232	42397	153	42478	153

Order no.	Page	Order no.	Page	Order no.	Page	Order no.	Page
42479	153	43058	109	43126	172	43464	276
42480	153	43059	109	43128	168	43465	101
42481	153	43060	109	43139	135	43466	107
42482	153	43061	108	43140	138, 170	43467	107
42483	153	43062	108	43141	138, 170	43474	101
42484	153	43063	108	43142	138, 170	43538	281
42485	153	43065	109	43143	138, 170	43541	281
42501	153	43066	109	43144	138, 170	43544	281
42502	153	43067	109	43145	138, 170	43547	281
42503	153	43068	109	43146	138, 170	43613	187
42504	153	43069	109	43147	138, 170	43631	123
42505	153	43070	109	43148	138, 170	43634	172
42506	153	43071	109	43149	138, 170	43660	281
42507	154	43072	109	43150	138, 170	43661	281
42539	235	43073	109	43151	138, 170	43662	281
42548	235	43074	109	43152	136, 168	43663	281
42549	235	43075	109	43153	136, 168	43664	281
42550	235	43076	109	43154	136, 168	43665	281
42551	235	43077	109	43155	136, 168	43666	281
42766	122	43078	109	43156	136, 169	43667	281
42989	135	43079	109	43157	137, 169	43669	159
42990	145	43080	109	43158	137, 169	43670	159
42991	145	43081	109	43159	137, 169	43671	159
42992	146	43082	109	43160	121, 137, 169	43672	159
42993	146	43083	109	43161	136, 169	43673	159
42994	146	43084	109	43162	136, 169	43674	159
42995	146	43085	109	43163	139	43675	159
42996	145	43086	109	43164	139	43676	159
42997	145	43087	109	43167	134	43677	159
42998	145	43088	109	43177	171	43678	159
43		43089	109	43240	298	43679	159
43022	106	43090	109	43292	135	43680	159
43023	105	43091	109	43304	292	43681	159
43024	105	43092	109	43324	292	43682	159
43025	106	43093	109	43325	292	43683	159
43026	108	43094	109	43326	276	43684	159
43027	108	43095	109	43327	276	43685	159
43028	108	43096	109	43332	292	43686	159
43029	108	43097	109	43333	292	43687	159
43030	108	43098	109	43334	292	43688	159
43031	108	43099	109	43335	276	43689	159
43032	108	43100	110	43336	276	43690	159
43033	108	43101	110	43337	292	43691	159
43034	108	43102	110	43338	292	43692	159
43035	108	43103	110	43339	292	43693	159
43036	108	43104	110	43340	276	43694	159
43037	108	43105	110	43341	276	43695	159
43038	108	43106	110	43449	134	43696	159
43039	108	43107	110	43450	292	43697	159
43040	108	43108	110	43451	292	43698	159
43041	108	43109	110	43453	276	43699	159
43042	108	43110	110	43454	276	43700	159
43043	108	43111	110	43455	292	43701	159
43044	108	43112	110	43456	292	43702	159
43052	108	43113	110	43457	292	43703	159
43053	108	43114	138, 170	43458	276	43704	159
43054	108	43115	138, 170	43459	276	43705	159
43055	109	43116	138, 170	43460	292	43706	159
43056	109	43117	138, 170	43461	292	43707	158
43057	109	43125	285	43463	276	43708	158

Order number register

Order no.	Page	Order no.	Page	Order no.	Page
43709	263	43952	342, 343	44620	285
43797	125	43953	342, 343	44684	267
43798	125	43954	344	45	
43847	212	43955	344	45223	287
43848	211	43956	344	73	
43849	206	43957	344	73917	341
43850	206	43958	344		
43852	207	43959	344		
43858	188	43960	344		
43859	188	43961	344		
43860	188	43962	344		
43861	188	43963	344		
43862	188	43964	344		
43863	188	43965	345		
43864	188	43966	345		
43865	188	43967	345		
43866	188	43968	345		
43867	188	43969	345		
43868	188	43970	345		
43869	188	43971	346		
43870	188	43972	346		
43879	100	43973	346		
43882	153	43974	346		
43894	149	43975	346		
43895	187	43976	346		
43898	181	43982	116, 336		
43899	339	43984	116, 336		
43900	339	43985	115, 337		
43903	339	43987	115, 337		
43904	339	43994	113		
43905	339	43995	117, 337		
43907	339	43996	340, 341		
43908	340, 341	44			
43909	340, 341	44001	194		
43910	340, 341	44005	338		
43911	340, 341	44007	338		
43912	340, 341	44008	324		
43913	340, 341	44106	121, 137		
43914	340, 341	44107	137, 137		
43915	340, 341	44128	97		
43916	340, 341	44163	172		
43917	340	44240	285		
43918	340, 341	44241	285		
43919	340, 341	44242	285		
43927	340, 341	44309	125		
43928	340, 341	44314	282		
43932	340, 341	44318	120		
43933	340, 341	44319	125		
43934	340, 341	44351	120		
43935	342, 343	44355	172		
43936	342, 343	44363	122		
43937	342, 343	44364	122		
43938	342, 343	44366	121, 137		
43939	342, 343	44367	114		
43940	342, 343	44385	138, 170		
43941	342, 343	44574	104		
43942	342, 343	44576	114		
43947	342, 343	44617	284		
43948	342, 343	44618	284		
43951	342, 343	44619	284		



Article number register

Article no.	Page						
22		269ESD	202	283696	180	29701280S4	167
22 0 05	300	269SE	203	283793	171	29701S5	167
2270P	142	269T11	200	283794	171	30	
2270PK601	135	269T1101	200	283795	171	300	154
2271P	142	269T4	200	283799	172	301	154
24		269T6	200	283799	172	302	147
246	331	27		284	198	3021	151
24601	194	270P	159	28400	198	3022	147
246176	285	270PK601	158	28401	198	3023	149
24618T	108	271P	159	28411	198	302ESD	158
24628	263	273P	159	28422	198	302ESDHK501	157
24629	263	275P	159	28437	198	302HK12	143
24636	259	276P	159	2844	199	302HK601	143
24636B5	259	276PY	159	28455	198	302HK6SO	143
24667	194	277P	159	284ESD	198	302SY	152
24670	124	277PK601	158	284ESDT601	197	302ZK6SO	143
24678	285	278P	159	284TR	198	303190	270
24680	285	28		2850	174	30390	271
24681	194	281	262	2850	175	30391	270
24682	194	281	262	2852	174	308	152
25		281	263	2852S10	173	308HK6	144
25511	142	281B11	195	2852S1001	173	308ZK6	144
25513	125	281P	263	2859	177	31	
25513	125	281T11	195	28590	176	311	147
25514	125	281T601	196	28591	176	3111	151
25515	125	2822	172	28592	176	311ESD	158
2553	142	2831	135	28593	176	311K6	144
2557	142	2831	135	28594	177	311SY	152
26		2831	135	28595	176	312	152
260P	153	2831	139	28595R	176	313	147
260PK601	145	283109020	186	28596	176	313ESD	158
260PK701	145	283109021	186	28596R	176	313SY	152
2611P	153	283109022	186	28597	176	314	152
261P	153	283109023	186	28599	177	32	
262P	153	283110	138	28599	177	3201	140
263P	153	283110	138	2872	166	3201K12	131
263PK601	146	283110	170	2872T13	165	3201K6	132
263PZ	154	283111	138	2872T18	164	3201K601	132
264P	153	283111	170	28799	168	3201ZK6	132
264PK601	146	283112	138	28799	168	320N	141
264PZ	153	283112	170	2879B7	168	320NK6	133
265P	154	283113	138	2882	181	320NK7	133
265PK601	146	283113	170	2882S13	181	320NZK6SO	133
266P	153	283114	138	2891	178	3211	140
266PK801	146	283114	170	2893	178	321N	141
266PY	153	283115	138	2893S01	178	322	142
267PK601	145	283115	170	2899	172	322K5	134
267PK6M01	145	283116	138	2899	179	323N	141
267PR	153	283116	170	28993	179	324	141
267PR	153	283117	138	28995	179	3241	140
267PRK601	145	283117	170	28996	179	325	141
268P	154	283118	138	28999	179	3251	140
269	202	283118	170	28999	179	3251K6	132
26900	203	2831T18	130	29		3251TR	140
26901	203	2831T901	130	2909	126	3251TRK6	132
26911	203	2831T902	130	2920	175	327	141
2691T11ESD	202	28352	172	2933	171	3271	140
26922	203	28360	180	2970	167	328	141
26937	203	283693	180	29701080S4	167	3281	140
26955	203	283695	180	29701200S4	167		

Article no.	Page						
33		363TR	223	37390	271	59	
331	228	363TRH8	215	38		590T401	120
33391	268	363TRP7	191	380101	189	590T601	123
33394	267	363TRP8	191	380102	189	591T101	120
33397	266	363VB	214	380103	189	599001	122
334	225	364	228	380104	189	599006	122
334DSK6	216	364DS	224	380302020	189	599007	122
334DSR	224	364DSK6	216	380302021	189	5992	122
334DSR	224	364IP	228	38090101	189	5992	122
334N	227	364R	228	38090102	189	70	
334R	225	364VB	217	38090103	189	7000EB16ESD	201
334RVB	216	365	229	384	262	7000EB26ESD	201
334VB	216	365IP	229	386	262	7000SK65ESD	254
334Z	226	365IPVB	217	387	262	7000Z	255
336	226	365VB	217	387	262	7001	255
336N	227	366	222	387	263	7003Z	255
336Z	227	366BE	221	388	263	7003Z	255
33791	268	366BEH8	213	388DS	263	7005	255
338	226	366BEHZ13	212	39		7009	255
33891	269	366BET	222	397	151	7010Z	246
34		366BETSZ13TS	213	398	151	7011Z	246
341	149	366H8	214	40		7011Z	248
341K5	144	366R	221	40010	155	7012Z	246
343	149	366RH8	212	40010	155	7013RZ	247
344	150	366RHM7	212	40511	160	7013Z	247
347	150	366RHZ13	211	405A	160	7013ZH	247
347Z	150	366SZ13	214	405B	160	7015Z	246
35		366SZ13TS	213	41		7015ZH	246
350	221	366TS	222	4101000	333	7015ZK	246
350H7	211	367	148	4102000	333	7016Z	246
350H9	210	367R	148	4102001	333	7016ZIPIR	246
351PG7	192	369	219	4102005	332	7017ZR	247
351PG9X	190	369B	220	4102007	333	7017ZR	247
351PK7	193	369E9F	206	4102008	332	7018Z	247
352B	220	369F	218	4111	332	7019ZOTTS	247
352H9B	210	369H11	209	4112	332	7019ZOTTW	247
352HM5B	211	369H7	209	4112	332	7019ZSIT	247
356	148	369H9	209	4113	332	7019ZSP	247
357	149	369H9B	210	50		7019ZXZN	247
3581	140	369HZ8	210	500	154	7040ZL	250
358N	141	369K	219	509	154	7041Z	250
36		369KH9	209	53		7042Z	250
361IP	222	369RE9F	206	530	151	7043Z	252
361IPH8	215	369RF	218	530HK6	145	7043ZR	252
362	148	369RF	218	530ZK6	145	7044M	258
362BE	147	369RH9	207	531	151	7044M	258
362ESD	158	369RHZ13	207	532	151	7044Z	256
362ESDK5	157	369RP7	192	54		7044Z	256
362IP	148	369RZ	218	540	225	7044Z	258
362K6SO	143	369S9	208	540DS	224	7045BE9570	254
362K7	143	369SZ13B	208	55		7045R	251
362R	147	369T	219	5527	156	7045Z	251
362RIP	148	369TS9	208	5533	156	7045Z	251
362RK6SO	143	369Z	219	5533HK5	156	7045ZH	252
362TR	148	369ZB	220	5533ZK5	156	7046Z	252
362TRK6	143	37		5534	156	7047ZR	252
363	223	370	229	5535	156	7048Z	252
363H8	214	370IP	229	5590N	108	7049PHM	250
363P7	190	370VB	217	5590NA	108	7049PZM	250
363P8	190	372	150	5590NT20	106	7049ZOTTS	252



Article number register

Article no.	Page	Article no.	Page	Article no.	Page	Article no.	Page
71		741592730030	188	9300019	112	SB2831B901	169
7103	256	741990102030	188	9300020	112	SB2831B902	137
7103	256	78		9300024	111	SB2831B902	169
7110	256	7802	199	9300025	102	SB2831B903	121
7110H	261	7803	199	9300026	111	SB2831B903	137
7113	261	7806	257	9300031	103	SB2831B903	169
7113P	261	7807	257	9300035	102	SB2831B904	121
7113S	261	79		9300040	100	SB2831B904	137
7123	260	79186B5	257	9300041	113	SB2831B950	136
7140	261	79187B5	257	93001001	115	SB2831B950	169
7143	261	79187T05	114	93001001	337	SB2831B951	136
7148	260	7928913	244	93001003	115	SB2831B951	169
7148CF	260	7928923	244	93001003	337	SB2831B992	139
7148CS	260	7928928	244	93001011	116	SB2831PB900	121
7183	261	7945H	240	93001011	336	SB2831PB900	137
72		7947005	242	93001013	116	SB2831PB901	121
7201	259	7947505	242	93001013	336	SB2831PB901	137
7201	259	7947505TR	242	93001911R	117	SB3201S204	132
7204Z	259	7947902	242	93001911R	337	SB327S2	133
7207NEX	109	7947904	242	930050005	104	SB328S2	133
7207NHS	110	7947905	242	930070103	97	SB351PM8X	190
7207NK2001	105	7947995	242	9300702	99	SB380201	187
7207NRW	108	7947999	242	C0		SB380304021	187
7207NS	109	7948005	241	C000A	340	SB4304010	155
7208NEX	109	7948043	241	C000A	340	SB43040K10	155
7208NHS	110	7948927	241	C000A100	339	SB534S5	330
7208NK2001	105	797901	245	C000A400	339	SB7945TY202	234
7208NS	109	797902	245	C000AVH	338	SB7945TY303	234
7209NEX	109	797903	245	C000C100	339	SB7945TY505	234
7209NEX	114	80		C000C400	339	SB7945TY903	234
7209NHS	110	800	328	C000CVH	338	SB7945TY904	234
7209NK2001	106	8001	328	C001A	342	SB7945TY905	234
7209NK2002	101	8001K	329	C001A	342	SB7946TY202	232
7209NK2003	107	800K	329	C001A200	339	SB7946TY303	232
7209NK2004	107	800S	329	C001C200	339	SB7946TY505	232
7209NRW	101	800V	328	C020	344	SB7946TY903	232
7209NS	109	802	328	C040	344	SB7946TY904	232
7210	258	8021	328	C1		SB7946TY905	232
7240	258	82		C101	345	SB7947005	243
73		829-0	327	C141	345	SB7947505	243
7311Z	256	83		C146	346	SB7947505TR	243
7312Z	256	830-0	327	C161	346	SB7947902	243
7321Z	256	831-1	326	SB		SB7947904	243
7322Z	256	831-3	326	SB24602	194	SB7947999	243
7325Z	256	831-5	326	SB28310101	134	SB7947T303	236
7331Z	256	831-8	327	SB28310301	134	SB7947T906	236
7332Z	257	831-9	327	SB28310401	134	SB7947T999	236
7341Z	257	832-13	325	SB2831B001	136	SB7947Y202	239
74		832-15	325	SB2831B001	168	SB7947Y505	239
741094060030	188	832-33	325	SB2831B501	136	SB7947Y904	239
741095565030	188	832-35	325	SB2831B501	168	SB7948T950	236
741190003030	188	832-38	325	SB2831B502	136	SB7948T999	236
741190102030	188	832-39	326	SB2831B502	168	SB7948Y505	238
741290003030	188	832-55	326	SB2831B601	136	SB7948Y904	238
741290102030	188	832-99	326	SB2831B601	168	SB7948Y950	238
741390304030	188	832B801	324	SB2831B801	136	U	
741390506030	188	84		SB2831B801	169	U106T12	196
741590608030	188	846	330	SB2831B900	137	U106T8	197
741591015030	188	93		SB2831B900	169	XX	
741592025030	188	9300018	103	SB2831B901	137	XX2872S3	166

Article no.	Page	Article no.	Page	Article no.	Page
XX7011--922---	249	Z 25 0 06	282	Z 62 0 06	286
Z		Z 26 0 00	306	Z 62 0 06	287
Z 01 0 01	295	Z 26 2 00	306	Z 62 0 06	287
Z 01 0 02	294	Z 27 0 01	307	Z 62 0 06	287
Z 01 0 05	294	Z 27 0 01K	307	Z 62 0 06	287
Z 01 0 06	278	Z 30 0 01	302	Z 62 0 06	288
Z 01 0 09	278	Z 31 0 00	302	Z 65 0 05	306
Z 02 0 01	295	Z 31 0 01	302	Z 65 2 05	306
Z 02 0 02	295	Z 32 0 01	303	Z 66 0 00	307
Z 02 0 05	295	Z 32 0 10	303	Z 71 5 06	288
Z 02 0 06	278	Z 33 0 01	305	Z 71 7 06	288
Z 02 0 09	278	Z 33 1 01	305	Z 72 0 06	284
Z 02 2 02	279	Z 33 4 01	304	Z 72 0 06	285
Z 05 0 01	296	Z 33 5 01	304	Z 73 0 06	285
Z 05 0 02	296	Z 34 0 01	305	Z 73 2 06	285
Z 05 0 05	296	Z 34 1 01	305	Z 74 0 06	285
Z 05 0 06	279	Z 34 4 01	304	Z57000106K	284
Z 05 0 09	279	Z 34 5 01	304	Z99000101	289
Z 05 1 01	297	Z 36 0 01	297	Z99000104	308
Z 05 1 02	297	Z 36 0 03	317	Z99000106	274
Z 05 1 05	296	Z 36 0 04	312	Z99000109	274
Z 05 1 06	280	Z 36 1 03	318	Z99000201	288
Z 05 1 09	280	Z 36 1 04	312	Z99000205	289
Z 07 0 01	298	Z 37 0 04	312	Z99000206	104
Z 07 0 02	298	Z 38 0 04	312	Z99000401	290
Z 07 0 05	298	Z 40 0 03	316	Z99000602	113
Z 07 0 06	280	Z 40 1 03	317	Z99000701	290
Z 09 0 01	299	Z 40 1 04	309	ZP	
Z 09 0 02	299	Z 40 3 04	309	ZP 01 0 14	313
Z 09 0 05	299	Z 40 4 04	309	ZP 06 0 14	313
Z 09 0 06	280	Z 41 1 03	316	ZP 07 1 14	313
Z 12 1 01	292	Z 41 1 04	309	ZP 09 0 14	313
Z 12 1 02	292	Z 41 3 03	316	ZP 11 0 14	313
Z 12 1 05	292	Z 41 3 04	310	ZP 15 0 14	313
Z 12 1 06	276	Z 41 4 04	310	ZP 16 0 14	314
Z 12 1 09	276	Z 41 6 03	316	ZP 18 0 14	314
Z 14 0 06	276	Z 43 1 04	310	ZP 20 1 14	314
Z 14 1 01	275	Z 44 1 04	310	ZP 20 2 14	314
Z 14 1 06	275	Z 44 3 01	298	ZP 24 0 14	314
Z 15 0 01	297	Z 44 3 04	311	ZP 25 2 14	314
Z 16 2 01	293	Z 46 0 03	317	ZP 46 0 14	315
Z 16 3 02	293	Z 46 0 03	317	ZP 50 0 14	315
Z 16 3 05	292	Z 46 1 04	311	ZP99014002	308
Z 16 3 06	277	Z 47 1 04	311		
Z 16 3 09	277	Z 47 2 04	311		
Z 17 0 01	302	Z 49 2 03	318		
Z 18 0 01	291	Z 49 2 03	318		
Z 18 0 02	291	Z 50 2 01	281		
Z 18 0 05	291	Z 50 3 06	281		
Z 18 0 06	276	Z 50 3 09	281		
Z 21 0 01	300	Z 55 0 01	283		
Z 21 0 02	300	Z 55 0 02	283		
Z 21 0 05	300	Z 55 0 05	283		
Z 21 0 06	282	Z 55 0 06	282		
Z 22 0 01	301	Z 55 0 09	282		
Z 22 0 02	301	Z 57 0 06	284		
Z 22 0 06	282	Z 57 5 06	284		
Z 23 0 01	301	Z 60 0 01	286		
Z 23 0 05	301	Z 60 0 06	286		
Z 25 0 01	300	Z 60 0 06	286		



Legend

Drives

- △ Triangular nut
- Hexagon head
- Square nut
- Internal hexagon
- ◎ Internal hexagon with drill hole (tamper-resistant)
- ◎ Tamper Resistant hex
- ◎ Countersink
- Combination drill bit
- Pentalobe PL
- Y-Type
- ⊕ Phillips PH (cross-recessed)
- ⊕ Pozidriv PZ (Phillips)
- Robertson
- Round tip
- ⊖ Slotted
- ⊖ Slotted nut
- SIT
- Spanner
- Twist drill
- Sliding sleeve
- ⊕ Torq-Set®
- TORX®
- TORX® with drill hole (tamper-resistant)
- TORX PLUS®
- Tri-Wing®
- Multitooth
- Square reaming blade
- ⊕ Xeno SL/PZ

Screwdrivers [mm]

- ① Cut width
- ⊖ Tip width
- Round blade dimension
- Hex blade
- Hex bolster
- ⊖ Scraper width
- ⊖ Clip opening
- ⊖ Tip width
- ⊖ Head width, nut driver
- ⊖ Blade length
- ⊖ Shaft lengths
- ⊖ Handle length
- ⊖ Handle diameter
- ⊖ Torque T-handle length
- ⊖ Torque T-handle width
- max. Nm Max. torque value [Nm]
- max. in.lbs. Max. torque value [in.lbs.]
- ⊖% Accuracy [%]
- ⊖ Cable key depth

Pliers [mm]

- ⊖ Flat jaws
- ⊖ Half round jaws
- Round jaws
- ⊖ Cutter without bevel
- ⊖ Cutter with small bevel
- ⊖ Cutter with bevel
- ⊖ Anvil cutter
- ⊖ Center cutter
- ⊖ Scissors cutter
- ⊖ Front cutting edge in stripping pliers
- ⊖ mm Max. diameter
- ⊖ mm² Max. cross-section
- Max. gripper pipe diameter
- ⊖ Max. gripper width across flats
- ⊖ External retaining ring
- ⊖ Internal retaining ring
- ⊖ Clamping range
- ⊖ Opening width flat
- ⊖ Cutting force
- ⊖ with opening spring
- AWG American Wire Gauge
- ⊖ Saw blade length

Measurement tools [mm]

- ⊖ mm Width of segments
- ⊖ G Colour
- ⊖ mm Measurement capacity [mm]
- ⊖ in Measurement capacity in Inch
- Battery
- LED LED lumens
- ★ Laser light

Soft faced hammer [mm]

- Face diameter
- ⊖ Hammer face width
- ⊖ Hammer head width

General symbols

- ⊖ g Weight, g
- Diameter
- ⊖ Blister packed
- ⊖ mm Total length
- ⊖ " Total length Inch
- ⊖ Packaging unit

Drives

- Square nut
- Square
- G7 drive system
- Threaded connector
- SDS-Plus®
- Hex

L-keys [mm]

- Round blade dimension
- Hex blade
- Hex bolster
- ⊖ Shaft lengths
- ⊖ Blade length
- ⊖ Side driver length T-handle
- ⊖ Handle width
- ⊖ Diameter

Bits [mm]

- ⊖ Threaded connector
- ⊖ Drill working length
- ⊖ Screw size

TORX®, TORX PLUS®= Registered Trademarks of ACUMEN GlobalTechnologies B.V.
ACR/AOT, Tri-Wing®, Torq-Set®= Registered Trademarks of Phillips Screw Company
Pozidriv= Registered Trademark of European Industrial Services Ltd.



Ranges	Torque	Pliers	Impact tools
L-keys			Measurement tool
Screwdrivers			General information
Bits			

Subject to technical changes. All illustrations and graphics, specified dimensions and values and references to standards, e.g. DIN/EN, are non-binding. Any liability claims based on this will therefore be rejected. No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue. All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited. Our General Terms and Conditions (Terms of Sale, Delivery and Payment) apply. You will find our general terms and conditions at www.wiha.com.

Authorized Channel Partners



CHENNAI

Address:- Old No 158 New No. 325, Linghi Chetty Street, Channi-600001.
Branch (Sriperumbdur):- 29, Panjalpettu Village, Chennai Bangalore Highway, Sriperumbudur, Tamilnadu-602105
Email:- info@madrastools.net
Phone:- +91-98401-79451, +91- 80158-44478
GST No:- 33AAAPN9529P1Z6
MSME:- UDYAM-TN-02-0054132

PUNE

Address:- Shop No 2, 1045, Vishwashanti Building, Raviwar Peth, Pune - 411002
Branch (Talegaon):- Shop No: 1,2,3,4 Block Sector, Katavi Distric, Talegaon Dabhade, Pune - 450506
Email:- madrastoolspune@gmail.com
Phone:- +91-84464-47152, +91- 98404-22553
GST No:- 27EVSPM6059N1ZG
MSME:- UDYAM-MH-26-0345577